

NASA TECHNICAL NOTE



NASA TN D-8154

NASA TN D-8154




LOAN COPY: RETURN TO
AFWL TECHNICAL LIBRARY
KIRTLAND AFB, N. M.

**DATA FOR NASA'S AVSSE II EXPERIMENT:
25 MB SOUNDING DATA AND SYNOPTIC CHARTS**

Nancy F. Fucik and Robert E. Turner

George C. Marshall Space Flight Center

Marshall Space Flight Center, Ala. 35812

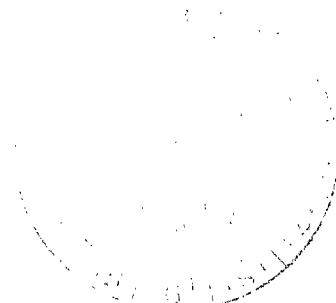

NATIONAL AERONAUTICS AND SPACE ADMINISTRATION • WASHINGTON, D. C. • MARCH 1976



0133953

TECHNICAL RI

1. REPORT NO. NASA TN D-8154	2. GOVERNMENT ACCESSION NO.	3. REPORT TYPE
4. TITLE AND SUBTITLE Data for NASA's AVSSE II Experiment: 25 mb Sounding Data and Synoptic Charts	5. REPORT DATE March 1976	6. PERFORMING ORGANIZATION CODE M162
7. AUTHOR(S) Nancy F. Fucik* and Robert E. Turner	8. PERFORMING ORGANIZATION REPORT #	10. WORK UNIT NO.
9. PERFORMING ORGANIZATION NAME AND ADDRESS George C. Marshall Space Flight Center Marshall Space Flight Center, Alabama 35812	11. CONTRACT OR GRANT NO.	13. TYPE OF REPORT & PERIOD COVERED Technical Note
12. SPONSORING AGENCY NAME AND ADDRESS National Aeronautics and Space Administration Washington, D.C. 20546	14. SPONSORING AGENCY CODE	
15. SUPPLEMENTARY NOTES This report is based on work performed under Contract NAS8-26751 and is published to make available a unique set of atmospheric data records for research use by the scientific community. The project was conducted under the operational direction of Robert E. Turner and Charles K. Hill of the Marshall Space Flight Center.		
16. ABSTRACT This report describes the AVSSE II Experiment and presents tabulated rawinsonde data at 25 mb intervals from the surface to 25 mb for the 23 stations participating in the experiment. Soundings were taken between 1200 GMT, May 6, and 1200 GMT, May 7, 1975. The methods of data processing and accuracy are briefly discussed. Synoptic charts prepared from the data are presented, as well as an example of contact data.		
* Texas A&M University, College Station, Texas		
17. KEY WORDS Meteorology Atmospheric variability Soundings Synoptic Mesoscale	18. DISTRIBUTION STATEMENT Category 47	
19. SECURITY CLASSIF. (of this report) Unclassified	20. SECURITY CLASSIF. (of this page) Unclassified	21. NO. OF PAGES 24
		22. PRICE \$3.25



ACKNOWLEDGMENTS

The tasks of processing the AVSSE II data and preparing this report required the efforts of approximately 15 people. The work is often tedious and yet must be performed with great care and speed. The authors are grateful to every person who worked diligently behind the scenes to accomplish this important task.

TABLE OF CONTENTS

	Page
I. INTRODUCTION	1
II. THE AVSSE II EXPERIMENT	1
III. DISCUSSION OF BASIC DATA	5
A. Collection	5
B. Methods of Processing	5
IV. DISCUSSION OF SOUNDING DATA	6
A. Accuracy Estimates	6
B. Tabulated Data	7
V. SYNOPTIC CHARTS	7
REFERENCES	18
APPENDIX: SOUNDING DATA	19
27 April 1975, 1200 GMT	20
6 May 1975, 1500 GMT	42
6 May 1975, 1800 GMT	63
6 May 1975, 2100 GMT	85
7 May 1975, 0000 GMT	108
7 May 1975, 0300 GMT	131
7 May 1975, 1200 GMT	153

LIST OF ILLUSTRATIONS

Figure	Title	Page
1.	Rawinsonde stations participating in the AVSSE II Experiment	3
2.	Synoptic chart for the surface at 1200 GMT, 6 May 1975	14
3.	Synoptic chart for the 700 mb level at 1200 GMT, 6 May 1975	15
4.	Synoptic chart for the surface at 1500 GMT, 7 May 1975	16
5.	Synoptic chart for the 700 mb level at 1200 GMT, 7 May 1975	17

LIST OF TABLES

Table	Title	Page
1.	Summary of AVE and AVSSE Experiments	2
2.	Rawinsonde Stations Participating in the AVSSE II Experiment	4
3.	Known Errors Remaining in the Reduced Data of the AVSSE II Experiment	5
4.	Example of Contact Data	8
5.	Explanation of Column Headings of Tabulated Sounding Data for the AVSSE II Experiment	12
6.	List of Missing Soundings	13

DATA FOR NASA'S AVSSE II EXPERIMENT: 25 MB SOUNDING DATA AND SYNOPTIC CHARTS

I. INTRODUCTION

To date NASA has conducted four Atmospheric Variability Experiments (AVE) and two Atmospheric Variability and Severe Storm Experiments (AVSSE). The dates of these experiments, observation times, and other information are summarized in Table 1.

The data reduction program and an error analysis have been presented by Fuelberg [1]. Some changes were made in Fuelberg's original program; these are discussed in Section III of this report. Also, error estimates taken from Fuelberg's report are presented in Section IV.

The AVE experiments were conducted for the primary purpose of studying atmospheric variability with emphasis on spatial and temporal changes in the structure of the atmosphere that could be determined from soundings taken at 3 h intervals, and which would not be reflected in soundings taken at 12 h intervals. Studies have shown (Scoggins et al. [2], Overall and Scoggins [3], and Wilson and Scoggins [4]) significant variability and changes in atmospheric structure from the 3 h data not present in the 12 h data.

The primary purpose of the AVSSE experiments is to provide a data base for studying atmospheric structure and variability associated with severe storms. These data will supplement measurements made by aircraft (a program conducted by the NASA Goddard Space Flight Center, Greenbelt, MD) in and near convective storms. The aircraft data will provide information on near-storm environments, while the AVSSE data will provide information on spatial and temporal scales between the aircraft data and normal 12 h rawinsonde sounding data.

II. THE AVSSE II EXPERIMENT

Twenty-three rawinsonde stations participated in the AVSSE II experiment. These stations are shown in Figure 1 and listed in Table 2. Soundings were taken at seven time periods — May 6 at 1200, 1500, 1800, and 2100 GMT, and on May 7 at 0000, 0300, and 1200 GMT.

TABLE 1. SUMMARY OF AVE AND AVSSE EXPERIMENTS

Experiment	Dates	Observation Times (GMT)	Data Reports
AVE I	19-22 February 1964	2/19 – 00, 03, 06, 09, 12, 15, 18, 21 2/20 – 00, 03, 06, 09, 12, 15, 18, 21 2/21 – 00, 03, 06, 09, 12, 15, 18, 21 2/22 – 00, 03, 06, 09, 12, 15, 18, 21 2/23 – 00	Scoggins and Smith [5,6]
AVE II	11-12 May 1974	5/11 – 12, 15, 18, 21 5/12 – 00, 03, 06, 09, 12	Scoggins and Turner [7] Fuelberg and Turner [8]
AVE III	6-7 February 1975	2/6 – 00, 06, 12, 15, 18, 21 2/7 – 00, 06, 12	Fuelberg and Turner [9]
AVE IV	24-25 April 1975	4/24 – 00, 06, 12, 15, 18, 21 4/25 – 00, 06, 12	Fucik and Turner [10]
AVSSE I	27-28 April 1975	4/27 – 12, 15, 18, 21 4/28 – 00, 03, 12	Fucik and Turner [11]
AVSSE II	6-7 May 1975	5/6 – 12, 15, 18, 21 5/7 – 00, 03, 12	This report

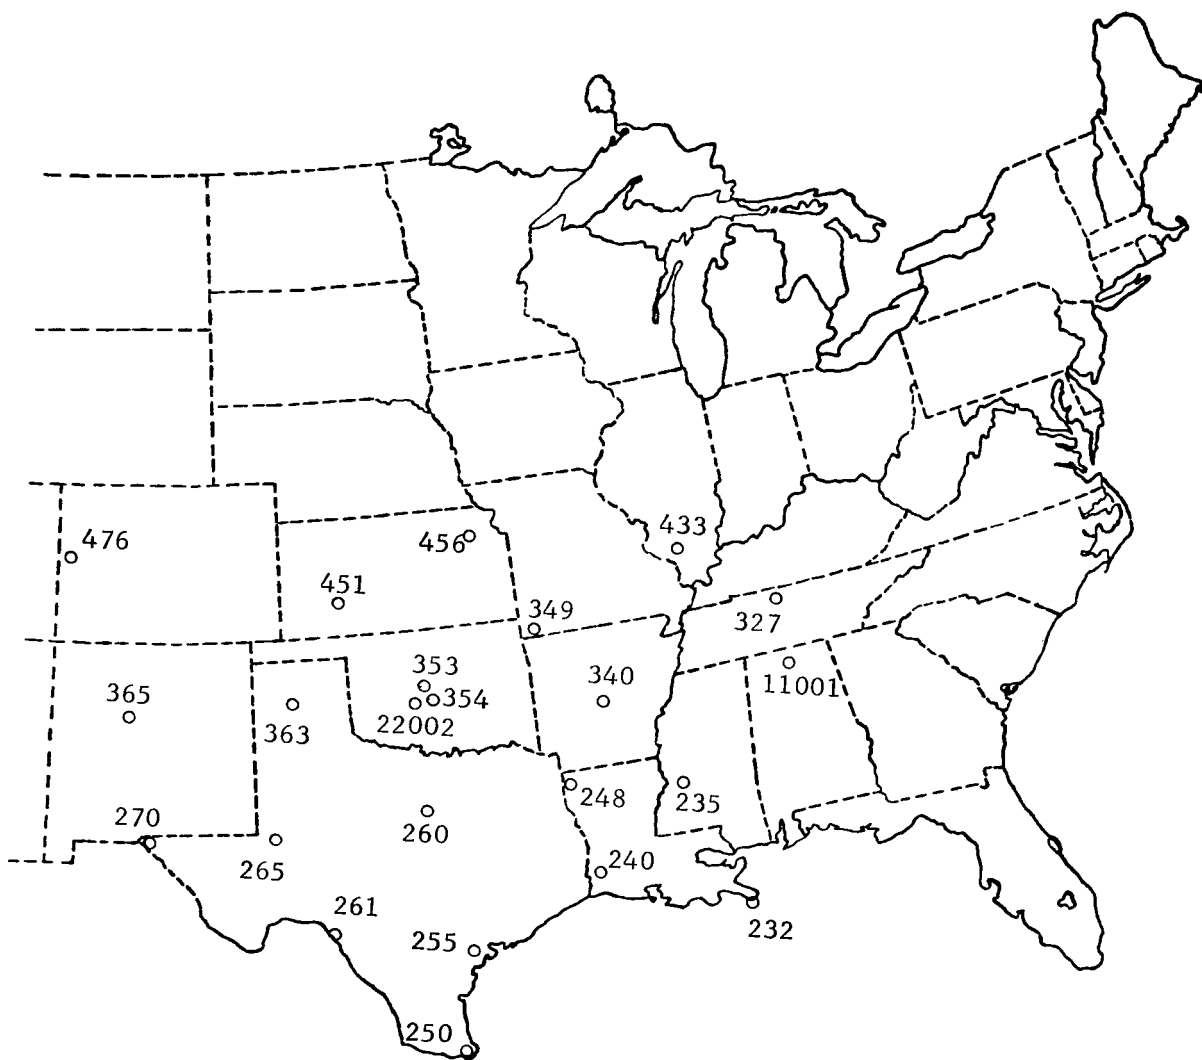


Figure 1. Rawinsonde stations participating in the AVSSE II Experiment.

**TABLE 2. RAWINSONDE STATIONS PARTICIPATING
IN THE AVSSE II EXPERIMENT**

Station Number	Location
232 (BVE)	Boothville, Louisiana
235 (JAN)	Jackson, Mississippi
240 (LCH)	Lake Charles, Louisiana
248 (SHV)	Shreveport, Louisiana
250 (BRO)	Brownsville, Texas
255 (VCT)	Victoria, Texas
260 (SEP)	Stephenville, Texas
261 (DRT)	Del Rio, Texas
265 (MAF)	Midland, Texas
270 (ELP)	El Paso, Texas
327 (BNA)	Nashville, Tennessee
340 (LIT)	Little Rock, Arkansas
349 (UMN)	Monett, Missouri
353 (OKC)	Oklahoma City, Oklahoma
354 (TIK)	Tinker Air Force Base, Oklahoma
363 (AMA)	Amarillo, Texas
365 (ABQ)	Albuquerque, New Mexico
433 (SLO)	Salem, Illinois
451 (DDC)	Dodge City, Kansas
456 (TOP)	Topeka, Kansas
476 (GJT)	Grand Junction, Colorado
11001 (MFS)	Marshall Space Flight Center, Alabama
22002 (FSI)	Fort Sill, Oklahoma

III. DISCUSSION OF BASIC DATA

A. Collection

Original information from which sounding data were computed was sent to the Aerospace Environment Division, NASA Marshall Space Flight Center (MSFC), Alabama. Texas A&M University personnel extracted ordinate and angle data at each pressure contact and keypunched these and baseline data into cards. All sounding computations were made on an IBM 360/65 computer at Texas A&M University.

B. Methods of Processing

The procedure used to compute soundings is the same as that used on the AVE III, AVE IV, and AVSSE I data and is described by Fuelberg [1] and Fuelberg and Turner [9]. All keypunched data were checked for errors by calculating centered differences on the input data. Processed soundings were further checked by calculating centered differences of wind direction and speed and by calculating the lapse rates of temperature and dew point. All questionable data were checked with the original strip chart information and any data found to be erroneous were corrected. All known errors are listed in Table 3.

TABLE 3. KNOWN ERRORS REMAINING IN THE REDUCED DATA OF
THE AVSSE II EXPERIMENT

Station	Date/GMT	Error
240 Lake Charles, Louisiana	7/0300	No wind data.
353 Oklahoma City, Oklahoma	7/1200	Ground equipment problems -- very short and erratic sounding.
235 Jackson, Mississippi	6/1500	Balloon went into thunderstorm and encountered icing conditions. Sounding very short.
433 Salem, Illinois	6/1500	Irregular sounding due to ground equipment and instrument problems.

The final data sets of the AVSSE II experiment consist of data computed at each pressure contact and at 25 mb intervals. Thermodynamic quantities were computed at each pressure contact, while wind data were computed from 30 s intervals by means of centered finite differences, and subsequently smoothed and interpolated to each pressure contact. These detailed profiles were then interpolated to give the 25 mb data presented in this report.

Three important changes were made in the original computer program [1]. These changes were reflected in all soundings beginning with AVE III and remain in the program for AVSSE II: (1) Humidity values, including dew point temperature, are computed only at temperatures above -40°C ; at temperatures below -40°C , humidity values are indicated by fields of nines as are missing values of humidity. The AVSSE II data contain computed moisture values down to a relative humidity of 1 percent; if the value of relative humidity is below 1 percent, it is set equal to 1 percent from which the other moisture variables are computed. (2) The second change involves the indication of winds which are based on low elevation angles. An asterisk following wind speed in the AVSSE II data means that the elevation angle was between 10° and 6° . A double asterisk indicates that the elevation angle was less than 6° . Since winds computed at low elevation angles have large rms errors, these data should be used with caution. (3) In the original computer program, 25 mb values of wind direction, scalar speed, and the u- and v-wind components were interpolated independently of each other. The program now interpolates the 25 mb values of u- and v-wind components and then determines wind direction and wind speed from the components. These changes appear in both the contact and 25 mb data.

IV. DISCUSSION OF SOUNDING DATA

A. Accuracy Estimates

Estimates of the rms errors in the thermodynamic quantities of the AVSSE II data are the same as those for all AVE experiments and those given by Fuelberg [1]. These estimates are:

<u>Parameter</u>	<u>Approximate rms Error</u>
Temperature	1°C
Pressure	1.3 mb from surface to 400 mb; 1.1 mb between 400 and 100 mb; 0.7 mb between 100 and 10 mb.
Humidity	10 percent
Pressure Altitude	10 gpm at 500 mb; 20 gpm at 300 mb; 50 gpm at 50 mb.

The rms errors for wind speed and direction are difficult to describe since they are a function of tracking geometry and other factors. Maximum rms errors for winds computed at 30 s intervals (based on the worst geometric tracking configuration) are: at 700 mb about 2.5 mps at an elevation angle of 10° and approximately 0.5 mps at an elevation angle of 40° ; at 500 mb, 4.5 mps, and 0.8 mps for the same elevation angles; and at 300 mb, 7.8 mps, and 1.0 mps, respectively. After assuming typical values of scalar wind speed at the various levels, maximum rms errors in wind direction were determined. The maximum rms errors at 700 mb range from about 9.5° at an elevation angle of 10° to approximately 1.3° at an elevation angle of 40° . At 500 mb the errors are 13.4° and 1.8° for the same elevation angles, while at 300 mb the maximum errors are 18.0° and 2.5° , respectively. The accuracy of the wind data at pressure contacts and at 25 mb intervals is greater than that stated for the 30 s winds because of the added smoothing and interpolation performed. In addition, errors cited for the 30 s winds were maxima for the stated conditions.

B. Tabulated Data

An example of AVSSE II contact data is given in Table 4. An explanation of the column headings is given in Table 5, and a list of missing soundings is given in Table 6. In Table 4, the first line of data for the time of 0.0 min is surface data. A series of nines is used to indicate missing data. The three numbers in the upper right-hand side of each page are the number of pressure contacts computed, the minimum pressure obtained (mb), and an angle identifier with the value 0 for 30 s angle input and 1 for 1 min angle input. The contact data are available in paper form or on magnetic tape from the George C. Marshall Space Flight Center, Aerospace Environment Division, Space Sciences Laboratory, Marshall Space Flight Center, Alabama 35812.

The contact data interpolated for 25 mb intervals are presented in the appendix. The column headings are identical to those used for the contact data and are described in Table 5. The soundings are arranged by time and appear in ascending order by station number for each time. The first line of data indicates the surface report which is followed by data from 1000 to 25 mb. In cases where the surface pressure is less than the given 25 mb pressure value, missing data (nines) are indicated for each quantity. This is also done when the sounding terminates before the 25 mb level is reached.

V. SYNOPTIC CHARTS

Synoptic charts for the beginning and ending of the observational period at the surface and 700 mb levels are presented in Figures 2 through 5. These maps are intended to depict the overall synoptic features during the observational period and should be reanalyzed when accuracy is a key factor.

TABLE 4. EXAMPLE OF CONTACT DATA

 STAT[ON NO. 232
 BOOTHVILLE, LA

 6 MAY 1975
 1115 GMT

157 18. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.3	1.0	1077.4	23.9	22.5	170.0	5.2	-0.9	5.1	298.8	344.0	17.3	92.0	0.0	0.0
0.1	6.0	30.7	1724.0	23.9	22.9	26.1	3.7	-1.6	-3.3	299.1	345.5	17.8	94.1	1.0	345.
0.3	7.0	118.6	994.0	23.4	22.0	26.1	3.7	-1.6	-3.3	299.4	344.0	17.1	92.1	1.0	345.
0.6	8.0	216.2	983.0	22.7	21.4	47.6	2.4	-1.8	-1.6	299.5	343.1	16.6	92.4	1.0	344.
0.9	9.0	314.5	972.0	21.8	20.4	148.2	4.1	-2.2	3.5	299.5	340.9	15.8	91.9	0.9	342.
1.2	10.0	413.6	961.0	21.3	17.9	164.7	8.9	-2.4	8.6	299.7	335.6	13.6	80.5	1.1	342.
1.6	11.0	531.9	948.0	21.1	14.1	169.9	13.9	-2.4	13.7	300.3	329.1	10.7	64.1	1.4	344.
1.9	12.0	623.9	928.0	21.1	12.3	169.6	13.6	-2.5	13.4	301.0	327.1	9.6	56.9	1.6	345.
2.3	13.0	726.1	927.0	20.9	12.0	167.8	13.7	-2.9	13.4	301.8	327.8	9.6	56.6	2.0	345.
2.6	14.0	829.4	916.0	20.7	10.4	166.8	13.8	-3.1	13.4	302.5	326.4	8.7	51.8	2.2	346.
2.9	15.0	924.4	906.0	20.7	8.3	167.1	13.7	-3.1	13.4	303.3	324.3	7.6	44.8	2.5	346.
3.3	16.0	1040.3	893.0	21.1	1.4	167.7	12.2	-2.6	11.9	304.6	318.2	4.7	26.9	2.8	346.
3.6	17.0	1155.4	882.0	20.9	2.8	168.4	11.1	-2.2	10.8	305.6	320.7	5.3	30.2	3.0	346.
4.0	18.0	1254.9	872.0	20.7	2.3	169.7	10.4	-1.9	10.2	306.3	321.2	5.2	29.7	3.2	346.
4.3	19.0	1354.4	862.0	20.2	1.5	170.7	9.9	-1.6	9.7	306.8	321.0	4.9	28.6	3.4	346.
4.6	20.0	1454.8	852.0	19.6	-1.6	169.4	9.3	-1.7	9.2	307.0	318.7	4.0	23.9	3.6	347.
5.1	21.0	1576.6	840.0	18.9	-6.1	157.8	8.9	-3.3	8.2	307.4	316.0	2.9	17.7	3.8	347.
5.4	22.0	1679.1	830.0	18.1	-6.2	150.6	9.3	-4.6	8.1	307.6	316.2	2.9	18.5	4.0	346.
5.7	23.0	1782.5	820.0	17.2	-3.8	146.0	9.5	-5.3	7.8	307.8	318.2	3.5	23.4	4.2	345.
6.1	24.0	1887.0	810.0	16.4	-4.5	142.3	9.5	-5.8	7.5	308.0	318.0	3.4	23.4	4.4	344.
6.4	25.0	1981.8	801.0	15.4	-3.5	141.5	9.5	-5.9	7.4	307.9	318.8	3.7	27.0	4.6	343.
6.9	26.0	2109.5	789.0	14.8	-1.8	144.2	9.4	-5.5	7.6	308.7	321.1	4.2	31.7	4.8	342.
7.2	27.0	2217.3	779.0	14.6	-4.4	148.3	9.3	-4.9	7.9	309.5	320.0	3.5	26.5	5.0	341.
7.6	28.0	2326.3	769.0	14.0	-5.2	155.8	9.1	-3.7	8.3	310.0	320.1	3.4	25.9	5.2	341.
7.9	29.0	2425.3	760.0	12.8	-6.8	162.9	9.0	-2.6	8.6	309.7	318.8	3.0	24.8	5.4	340.
8.3	30.0	2525.2	751.0	12.0	-4.0	173.2	9.2	-1.1	9.2	310.0	321.2	3.8	32.2	5.6	341.
8.6	31.0	2637.3	741.0	11.5	-2.7	180.4	9.8	0.1	9.8	310.7	323.2	4.3	37.1	5.7	341.
9.0	32.0	2739.3	732.0	10.9	-2.2	188.3	10.9	1.6	10.8	311.1	324.3	4.5	39.8	5.9	342.
9.3	33.0	2842.5	723.0	10.5	-2.2	193.8	11.7	2.8	11.3	311.8	325.1	4.5	40.7	6.1	343.
9.6	34.0	2958.3	713.0	9.6	-3.4	199.1	12.3	4.0	11.6	312.0	324.4	4.2	39.8	6.3	344.
10.0	35.0	3063.6	704.0	8.9	-5.4	206.5	12.8	5.7	11.5	312.3	323.2	3.6	35.9	6.6	346.
10.4	36.0	3193.9	693.0	8.3	-7.9	214.5	12.9	7.3	10.6	313.0	322.2	3.0	30.8	6.8	346.
10.7	37.0	3301.7	684.0	7.8	-11.3	220.2	12.6	8.2	9.7	313.5	320.7	2.4	24.4	7.0	349.
11.1	38.0	3410.7	675.0	6.9	-9.7	227.5	12.4	9.1	8.4	313.7	322.0	2.7	29.4	7.2	351.
11.4	39.0	3520.9	666.0	6.2	-6.3	231.8	12.2	9.6	7.5	314.2	325.0	3.6	40.2	7.3	353.
11.8	40.0	3632.2	657.0	5.0	-2.1	235.1	12.3	10.1	7.0	314.3	329.1	5.0	60.4	7.4	355.
12.2	41.0	3770.0	646.0	4.1	-0.5	237.6	12.6	10.7	6.8	314.9	331.9	5.8	72.2	7.5	357.
12.5	42.0	3871.4	638.0	3.1	-1.2	239.4	13.0	11.2	6.6	314.8	331.1	5.5	73.2	7.7	358.
12.9	43.0	3986.5	629.0	2.2	-3.5	244.2	13.6	12.2	5.9	315.0	329.1	4.7	65.7	7.8	360.
13.2	44.0	4102.9	620.0	1.4	-4.3	251.2	14.6	13.8	4.7	315.4	328.8	4.5	65.4	7.9	2.
13.6	45.0	4207.5	612.0	0.8	-6.7	258.2	16.0	15.7	3.3	315.7	327.1	3.8	57.1	8.0	4.
14.0	46.0	4326.4	603.0	0.3	-14.1	263.7	17.9	17.8	2.0	316.2	322.9	2.1	33.0	8.1	7.
14.4	47.0	4433.3	595.0	-0.9	-15.1	267.5	20.0	20.0	0.9	316.1	322.4	2.0	33.0	8.2	10.
14.7	48.0	4541.3	587.0	-1.5	-15.9	269.8	21.5	21.5	0.1	316.6	322.5	1.9	32.2	8.3	13.
15.0	49.0	4664.1	578.0	-2.6	-17.7	271.7	22.9	22.9	-0.7	316.7	321.9	1.6	30.0	8.4	15.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

TABLE 4. (Continued)

STATION NO. 232 BOOTHVILLE, LA															
6 MAY 1975 1115 GMT															
ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES															
TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SFC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
15.4	50.0	4774.5	570.0	-3.2	-19.3	273.2	24.3	24.3	-1.4	317.2	321.9	1.5	27.6	8.6	19.4
15.8	51.0	4914.4	560.0	-4.0	-21.6	273.0	25.2	25.2	-1.3	317.8	321.8	1.2	23.8	8.7	23.0
16.2	52.0	5027.7	552.0	-5.2	-22.1	271.7	25.8	25.8	-0.8	317.7	321.5	1.2	25.0	8.9	27.0
16.6	53.0	5142.1	544.0	-6.1	-22.9	269.9	26.1	26.1	0.0	317.9	321.6	1.1	25.0	9.2	30.0
16.9	54.0	5257.8	536.0	-7.3	-23.9	269.0	26.2	26.2	0.5	317.8	321.2	1.0	25.1	9.5	33.0
17.2	55.0	5360.0	529.0	-8.6	-24.5	268.5	26.2	26.2	0.7	317.4	320.7	1.0	26.2	9.8	35.0
17.7	56.0	5507.6	519.0	-9.9	-24.5	268.5	26.2	26.2	0.7	317.6	320.9	1.0	29.2	10.3	39.0
18.1	57.0	5627.2	511.0	-10.8	-24.5	268.9	26.2	26.2	0.5	318.0	321.4	1.0	31.4	10.7	41.0
18.5	58.0	5733.0	504.0	-12.0	-24.6	269.3	26.2	26.2	0.3	317.8	321.2	1.0	34.1	11.1	44.0
18.9	59.0	5855.2	496.0	-13.2	-24.4	269.9	26.0	26.0	0.0	317.7	321.3	1.1	38.4	11.6	46.0
19.3	60.0	5978.8	488.0	-14.5	-25.1	270.6	26.0	26.0	-0.3	317.7	321.0	1.0	39.9	12.0	48.0
19.7	61.0	6088.2	481.0	-15.3	-25.2	271.3	26.2	26.2	-0.6	317.9	321.3	1.0	42.1	12.5	50.0
20.0	62.0	6198.8	474.0	-16.1	-26.4	271.7	26.4	26.4	-0.8	318.2	320.8	0.8	33.6	12.8	51.0
20.4	63.0	6326.7	466.0	-17.1	-32.2	272.2	26.6	26.6	-1.0	318.6	320.4	0.5	25.5	13.3	53.0
20.9	64.0	6440.3	459.0	-16.8	-42.4	272.6	26.3	26.3	-1.2	320.2	320.9	0.2	8.7	14.0	55.0
21.2	65.0	6555.7	452.0	-16.8	-43.4	272.5	26.0	25.9	-1.2	321.6	322.3	0.2	7.9	14.3	56.0
21.7	66.0	6706.6	443.0	-17.6	-46.1	272.1	25.4	25.4	-1.0	322.5	323.0	0.1	6.2	15.0	58.0
22.1	67.0	6825.5	436.0	-18.3	-46.5	271.6	25.1	25.1	-0.7	323.1	323.6	0.1	6.3	15.5	59.0
22.6	68.0	6946.2	429.0	-19.1	-44.9	271.2	24.9	24.9	-0.5	323.5	324.0	0.1	6.8	16.1	61.0
23.0	69.0	7068.4	422.0	-19.8	-47.3	271.3	24.8	24.8	-0.6	324.2	324.6	0.1	6.5	16.7	62.0
23.4	70.0	7174.6	416.0	-19.9	-47.4	272.6	25.0	24.9	-1.1	325.3	325.8	0.1	6.6	17.1	63.0
23.9	71.0	7318.4	408.0	-20.9	-47.9	275.7	25.6	25.5	-2.6	325.9	326.4	0.1	6.7	17.8	64.0
24.3	72.0	7464.5	400.0	-21.8	-48.4	279.0	26.5	26.1	-4.1	326.6	327.0	0.1	6.9	18.3	65.0
24.7	73.0	7575.5	394.0	-22.8	-44.2	281.9	27.5	26.9	-5.7	326.8	327.5	0.2	12.0	18.9	66.0
25.1	74.0	7687.9	388.0	-23.8	-37.9	284.2	28.7	27.9	-7.0	326.8	328.2	0.4	25.8	19.4	67.0
25.5	75.0	7827.7	381.0	-24.2	-38.2	285.4	30.0	28.9	-8.0	328.0	329.3	0.4	25.8	19.9	69.0
25.9	76.0	7955.7	374.0	-25.4	-39.2	285.8	31.0	29.8	-8.4	328.2	329.4	0.3	25.9	20.5	70.0
26.2	77.0	8072.8	368.0	-26.6	-42.2	285.8	31.6	30.4	-8.6	328.1	329.0	0.2	21.2	21.0	71.0
26.7	78.0	8191.3	362.0	-27.6	-44.8	285.2	32.7	31.6	-8.6	328.3	329.0	0.2	17.5	21.8	72.0
27.1	79.0	8311.2	356.0	-28.6	-45.9	284.2	33.8	32.8	-8.3	328.6	329.2	0.2	17.0	22.4	73.0
27.5	80.0	8453.2	349.0	-29.6	-48.2	283.1	35.1	34.1	-7.9	329.0	329.5	0.1	14.3	23.2	74.0
28.0	81.0	8597.4	342.0	-30.8	-49.1	281.9	36.5	35.7	-7.5	329.3	329.8	0.1	14.5	24.1	76.0
28.4	82.0	8722.8	336.0	-31.8	-49.9	281.5	37.4	36.6	-7.4	329.6	330.0	0.1	14.6	24.9	76.0
28.9	83.0	8849.8	330.0	-33.2	-50.9	281.9	37.9	37.1	-7.8	329.5	329.9	0.1	14.8	26.0	77.0
29.2	84.0	8973.5	324.0	-34.3	-51.8	282.6	38.2	37.2	-8.3	329.6	329.9	0.1	14.9	26.6	78.0
29.7	85.0	9109.1	318.0	-35.0	-52.3	283.8	38.8	37.7	-9.2	330.4	330.8	0.1	15.0	27.6	79.0
30.2	86.0	9264.9	311.0	-36.1	-53.2	284.8	39.7	38.4	-10.1	331.0	331.4	0.1	15.1	28.7	80.0
30.6	87.0	9376.3	306.0	-37.0	-53.2	285.5	40.2	38.8	-10.8	331.3	331.6	0.1	16.6	29.6	81.0
31.1	88.0	9513.1	300.0	-37.9	-53.9	286.6	39.9	38.2	-11.4	331.8	332.1	0.1	16.7	30.7	82.0
31.5	89.0	9628.7	295.0	-38.6	-54.4	287.6	39.4	37.5	-11.9	332.5	332.8	0.1	16.7	31.6	83.0
32.0	90.0	9769.5	289.0	-39.8	-55.4	288.2	39.5	37.5	-12.4	332.7	333.0	0.1	16.9	32.6	83.0
32.5	91.0	9888.6	284.0	-40.8	-59.9	287.5	41.0	39.1	-12.3	333.1	999.9	99.9	999.9	33.7	84.0
32.9	92.0	10009.2	279.0	-41.7	-59.9	286.0	42.7	41.1	-11.8	333.4	999.9	99.9	999.9	34.6	85.0
33.4	93.0	10156.2	273.0	-42.8	-59.9	284.2	44.3	43.0	-10.9	333.9	999.9	99.9	999.9	35.9	86.0
33.9	94.0	10290.6	268.0	-43.9	-59.9	282.8	45.0	43.9	-10.0	334.1	999.9	99.9	999.9	37.2	86.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

TABLE 4. (Continued)

STATION NO. 232 BOOTHVILLE, LA															157 18. 1		
6 MAY 1975 1115 GMT																	
ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES																	
TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG		
34.4	95.0	10406.9	263.0	-44.5	99.9	282.0	45.4	44.4	-9.4	335.1	999.9	99.9	999.9	38.4	87.		
34.9	96.0	10561.1	257.0	-45.8	99.9	281.8	45.2	44.3	-9.3	335.4	999.9	99.9	999.9	39.8	87.		
35.3	97.0	10691.6	252.0	-46.9	99.9	282.3	44.6	43.6	-9.5	335.6	999.9	99.9	999.9	40.9	88.		
35.8	98.0	10824.1	247.0	-47.9	99.9	283.7	43.6	42.3	-10.3	336.0	999.9	99.9	999.9	42.2	88.		
36.3	99.0	10958.6	242.0	-49.4	99.9	285.3	43.0	41.4	-11.3	335.8	999.9	99.9	999.9	43.4	89.		
36.7	100.0	11095.3	237.0	-50.1	99.9	286.5	42.7	41.0	-12.1	336.7	999.9	99.9	999.9	44.4	89.		
37.3	101.0	11242.3	231.0	-51.3	99.9	288.1	42.2	40.1	-13.1	337.3	999.9	99.9	999.9	45.8	90.		
37.9	102.0	11474.3	226.0	-51.9	99.9	289.7	41.2	38.8	-13.9	338.5	999.9	99.9	999.9	47.3	90.		
38.3	103.0	11519.9	222.0	-52.7	99.9	290.1	41.6	39.1	-14.3	339.1	999.9	99.9	999.9	48.2	91.		
38.9	104.0	11666.6	217.0	-53.8	99.9	289.1	45.3	42.8	-14.8	339.6	999.9	99.9	999.9	49.5	91.		
39.4	105.0	11785.9	213.0	-54.7	99.9	287.8	49.8	47.4	-15.2	340.0	999.9	99.9	999.9	50.9	92.		
39.9	106.0	11937.5	208.0	-55.8	99.9	287.4	52.4	50.0	-15.7	340.5	999.9	99.9	999.9	52.5	92.		
40.4	107.0	12067.8	204.0	-56.8	99.9	287.4	53.5	51.1	-16.0	340.9	999.9	99.9	999.9	54.0	93.		
40.8	108.0	12186.0	200.0	-58.0	99.9	287.1	54.4	52.0	-16.0	341.0	999.9	99.9	999.9	55.2	93.		
41.2	109.0	12312.9	196.0	-59.3	99.9	286.6	55.4	53.1	-15.8	340.8	999.9	99.9	999.9	56.5	93.		
41.7	110.0	12474.3	191.0	-60.4	99.9	286.3	56.2	54.0	-15.7	341.6	999.9	99.9	999.9	58.2	94.		
42.3	111.0	12639.3	186.0	-61.3	99.9	286.8	55.7	53.3	-16.1	342.8	999.9	99.9	999.9	60.2	94.		
42.8	112.0	12773.8	182.0	-62.7	99.9	288.1	53.0	50.4	-16.4	342.6	999.9	99.9	999.9	61.9	94.		
43.2	113.0	12910.3	178.0	-64.0	99.9	289.0	50.6	47.9	-16.4	342.6	999.9	99.9	999.9	63.1	95.		
43.7	114.0	13049.2	174.0	-65.0	99.9	288.7	50.6	47.9	-16.2	343.3	999.9	99.9	999.9	64.3	95.		
44.3	115.0	13190.8	170.0	-65.8	99.9	286.1	55.7	53.5	-15.5	344.3	999.9	99.9	999.9	66.1	95.		
44.9	116.0	13371.8	165.0	-66.6	99.9	283.8	58.5	56.8	-13.9	345.9	999.9	99.9	999.9	68.4	96.		
45.4	117.0	13520.2	161.0	-66.8	99.9	282.2	56.0	54.7	-11.8	348.0	999.9	99.9	999.9	70.1	96.		
45.9	118.0	13633.9	158.0	-66.8	99.9	280.1	51.9	51.1	-9.1	349.9	999.9	99.9	999.9	71.7	96.		
46.4	119.0	13789.1	154.0	-66.2	99.9	278.3	48.4	47.9	-7.0	353.5	999.9	99.9	999.9	73.2	96.		
47.0	120.0	13949.4	150.0	-64.4	99.9	277.6	45.6*	45.2	-6.0	359.1	999.9	99.9	999.9	74.9	96.		
47.6	121.0	14073.4	147.0	-62.9	99.9	277.1	45.7*	45.4	-5.7	363.8	999.9	99.9	999.9	76.4	96.		
48.2	122.0	14243.8	143.0	-61.4	99.9	275.9	47.2*	47.0	-4.8	369.3	999.9	99.9	999.9	78.1	96.		
48.8	123.0	14375.5	140.0	-60.9	99.9	275.9	48.8*	48.5	-5.0	372.4	999.9	99.9	999.9	79.8	96.		
49.4	124.0	14555.9	136.0	-60.4	99.9	277.2	48.5*	48.1	-6.1	376.5	999.9	99.9	999.9	81.7	96.		
50.0	125.0	14694.9	133.0	-60.4	99.9	277.7	45.2*	44.8	-6.1	378.9	999.9	99.9	999.9	83.4	96.		
50.6	126.0	14824.7	129.0	-61.6	99.9	278.4	41.8*	41.4	-6.1	380.0	999.9	99.9	999.9	84.9	96.		
51.2	127.0	15037.2	126.0	-62.4	99.9	280.1	41.5*	40.8	-7.2	381.2	999.9	99.9	999.9	86.3	96.		
51.8	128.0	15229.2	122.0	-62.7	99.9	280.0	42.2*	41.5	-7.3	384.1	999.9	99.9	999.9	87.9	96.		
52.3	129.0	15382.5	119.0	-63.3	99.9	278.0	41.0*	40.6	-5.7	385.8	999.9	99.9	999.9	89.2	96.		
52.9	130.0	15530.4	116.0	-63.5	99.9	275.0	36.8*	36.7	-3.2	388.3	999.9	99.9	999.9	90.7	96.		
53.5	131.0	15754.9	112.0	-63.5	99.9	272.3	31.2*	31.2	-1.3	392.2	999.9	99.9	999.9	91.9	96.		
54.1	132.0	15921.1	109.0	-65.0	99.9	271.7	28.6*	28.5	-0.8	392.4	999.9	99.9	999.9	92.8	96.		
54.7	133.0	16090.6	106.0	-66.6	99.9	274.3	28.9*	28.8	-2.2	392.5	999.9	99.9	999.9	93.8	96.		
55.2	134.0	16267.9	103.0	-67.6	99.9	278.2	28.1*	27.8	-4.0	393.8	999.9	99.9	999.9	94.8	96.		
55.7	135.0	16441.5	100.0	-68.6	99.9	283.3	24.4*	23.8	-5.6	395.2	999.9	99.9	999.9	95.7	96.		
56.4	136.0	16623.7	97.0	-69.3	99.9	290.7	19.8*	18.5	-7.0	397.4	999.9	99.9	999.9	96.4	96.		
57.1	137.0	16874.1	93.0	-71.0	99.9	290.8	22.0*	20.6	-7.8	398.7	999.9	99.9	999.9	97.1	97.		
57.8	138.0	17067.7	90.0*	-72.2	99.9	287.5	25.0*	23.8	-7.5	400.2	999.9	99.9	999.9	98.2	97.		
58.6	139.0	17268.0	87.0	-70.8	99.9	286.2	24.6*	23.6	-6.8	406.9	999.9	99.9	999.9	99.4	97.		

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

TABLE 4. (Concluded)

STATION NO. 232
HOOTHVILLE, LA6 MAY 1975
1115 GMT

157 18. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SFC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
59.3	140.0	17546.9	83.0	-70.8	99.9	290.5	18.0*	16.9	-6.3	412.4	999.9	99.9	999.9	100.5	97.
60.1	141.0	17764.4	80.0	-72.2	99.9	288.7	10.4*	9.9	-3.3	413.9	999.9	99.9	999.9	101.0	97.
60.9	142.0	17990.0	77.0	-71.2	99.9	265.0	9.8*	9.7	0.8	420.4	999.9	99.9	999.9	101.4	97.
61.7	143.0	19225.1	74.0	-71.0	99.9	264.8	11.4*	11.3	1.0	425.7	999.9	99.9	999.9	101.9	97.
62.7	144.0	19557.6	70.0	-66.8	99.9	291.0	11.3*	10.6	-4.0	441.6	999.9	99.9	999.9	102.6	97.
63.6	145.0	18823.6	67.0	-65.0	99.9	310.0	7.5*	5.7	-4.8	451.0	999.9	99.9	999.9	103.2	97.
64.5	146.0	19112.4	64.0	-65.8	99.9	63.9	4.0*	-3.6	-1.8	455.2	999.9	99.9	999.9	103.2	97.
65.5	147.0	19394.7	61.0	-64.8	99.9	24.5	4.0*	-1.6	-3.6	463.7	999.9	99.9	999.9	102.8	97.
66.6	148.0	19705.3	58.0	-60.9	99.9	278.5	9.0	8.9	-1.3	479.2	999.9	99.9	999.9	103.5	97.
67.6	149.0	20035.2	55.0	-61.3	99.9	107.5	9.9	-9.5	3.0	485.7	999.9	99.9	999.9	103.4	97.
68.8	150.0	20385.4	52.0	-58.8	99.9	89.0	5.9	-5.9	-0.1	499.2	999.9	99.9	999.9	102.6	97.
69.9	151.0	20759.0	49.0	-58.1	99.9	320.5	4.0	2.5	-3.1	509.4	999.9	99.9	999.9	102.4	97.
71.1	152.0	21157.2	46.0	-57.8	99.9	307.7	3.0	2.3	-1.8	519.5	999.9	99.9	999.9	103.0	97.
72.5	153.0	21584.1	43.0	-56.3	99.9	301.1	6.1	5.2	-3.1	533.3	999.9	99.9	999.9	103.0	97.
73.8	154.0	22041.6	40.0	-56.2	99.9	330.9	6.4	3.1	-5.6	544.8	999.9	99.9	999.9	103.4	98.
75.2	155.0	22714.5	36.0	-55.4	99.9	134.1	5.9	2.6	-5.3	563.6	999.9	99.9	999.9	103.9	98.
76.7	156.0	23272.2	33.0	-53.3	99.9	286.3	2.8	2.7	-0.8	583.2	999.9	99.9	999.9	103.8	98.
78.4	157.0	23891.3	30.0	-49.5	99.9	63.1	3.2	-2.8	-1.4	609.7	999.9	99.9	999.9	104.2	98.
80.1	158.0	24582.2	27.0	-49.1	99.9	320.1	9.8	6.3	-7.5	629.6	999.9	99.9	999.9	104.7	98.
81.9	159.0	25354.3	24.0	-49.7	99.9	72.9	5.7	-5.5	-1.7	649.4	999.9	99.9	999.9	104.9	99.
84.4	160.0	26230.4	21.0	-48.6	99.9	167.5	2.7	-0.6	2.7	677.8	999.9	99.9	999.9	103.9	98.
87.0	161.0	27256.7	18.0	-43.1	99.9	999.9	99.9	99.9	99.9	725.9	999.9	99.9	999.9	999.9	999.

TABLE 5. EXPLANATION OF COLUMN HEADINGS OF TABULATED
SOUNDING DATA FOR THE AVSSE II EXPERIMENT

TIME (MIN)	Time after balloon release.
CNTCT	Contact number.
HEIGHT (GPM)	Height of corresponding pressure surface in geopotential meters.
PRES (MB)	Pressure in millibars.
TEMP (DG C)	Ambient temperature in degrees Celsius. Note: An asterisk indicates that time from release and/or temperature were linearly interpolated.
DEW PT (DG C)	Dew point temperature in degrees Celsius.
DIR (DG)	Wind direction measured clockwise from true north and is the direction from which the wind is blowing.
SPEED (M/SEC)	Scalar wind speed in meters per second. Note: An asterisk indicates that wind quantities are based on an elevation angle that is between 10° and 6°. An double asterisk indicates that the elevation angle is less than 6°.
U COMP (M/SEC)	The E-W wind component, positive toward the east and negative toward the west.
V COMP (M/SEC)	The N-S wind component, positive toward the north and negative toward the south.
POT T (DG K)	Potential temperature in degrees Kelvin.
E POT T (DG K)	Equivalent potential temperature in degrees Kelvin.
MX RTO (GM/KG)	Mixing ratio in grams per kilogram.
RH (PCT)	Relative humidity in percent.
RANGE (KM)	Distance balloon is from release point along a radius vector.
AZ (DG)	Direction toward balloon measured clockwise from true north.

TABLE 6. LIST OF MISSING SOUNDINGS

Station	Date/GMT	Reason for Omission
232 Boothville, Louisiana	6/1500	Sounding not taken.
340 Little Rock, Arkansas	7/0300	Thermistor ice coated; data inaccurate.
354 Tinker AFB, Oklahoma	6/1200 6/1500 6/1800 7/1200	Soundings not taken.
22002 Fort Sill, Oklahoma	7/1200	Sounding not taken.

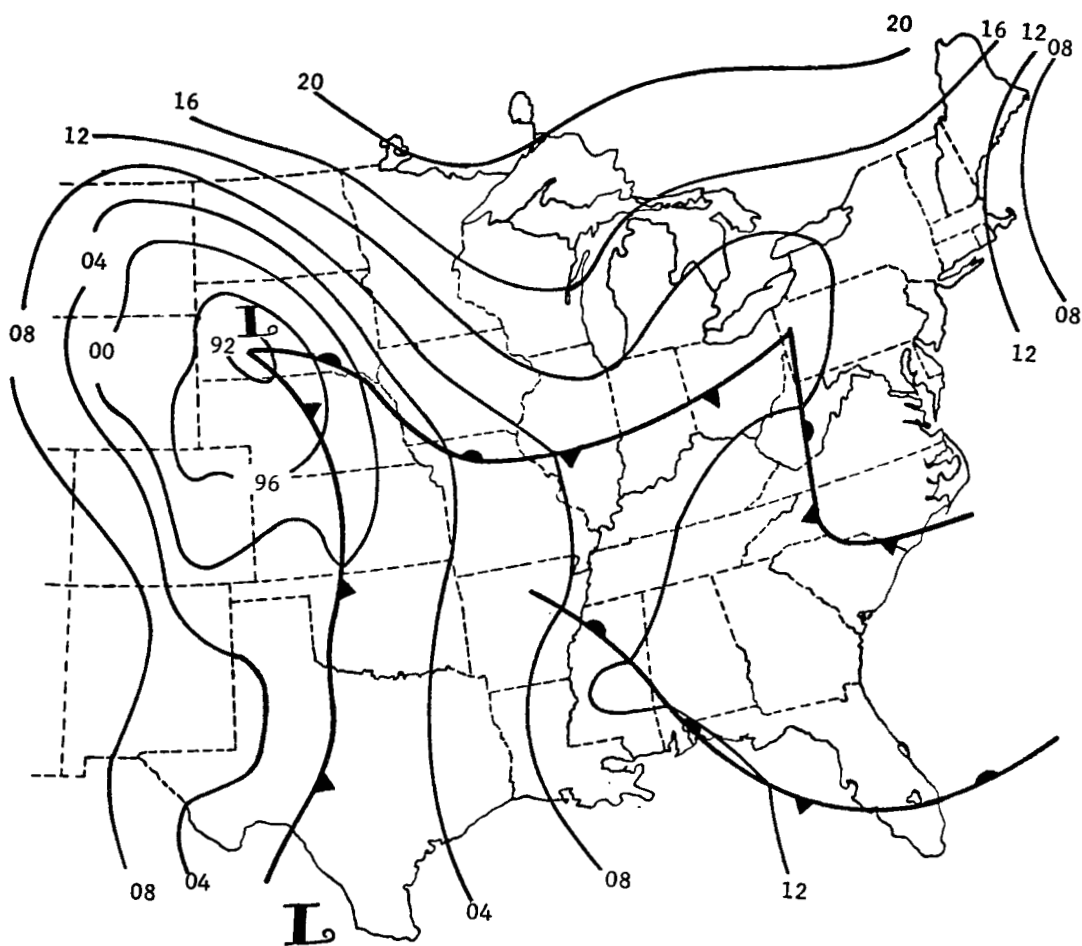


Figure 2. Synoptic chart for the surface at 1200 GMT, 6 May 1975.

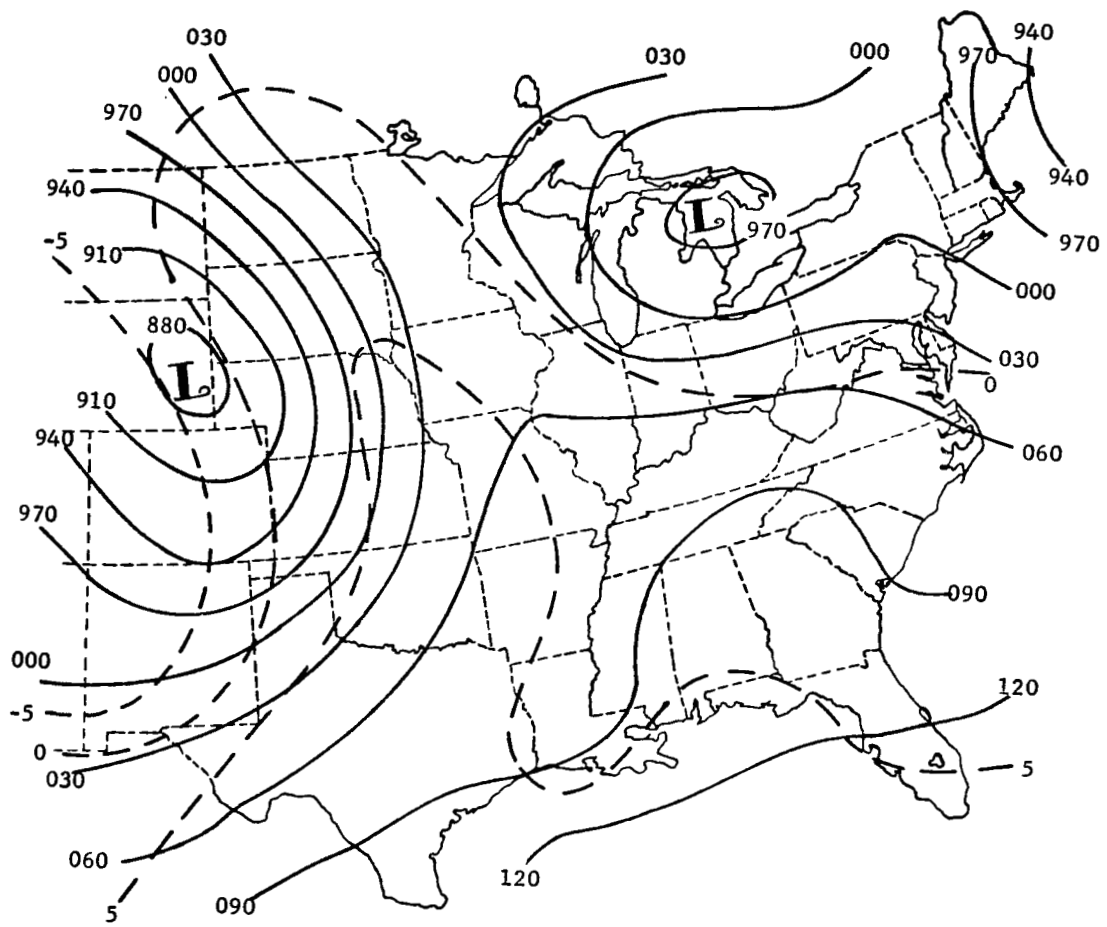


Figure 3. Synoptic chart for the 700 mb level at 1200 GMT, 6 May 1975.

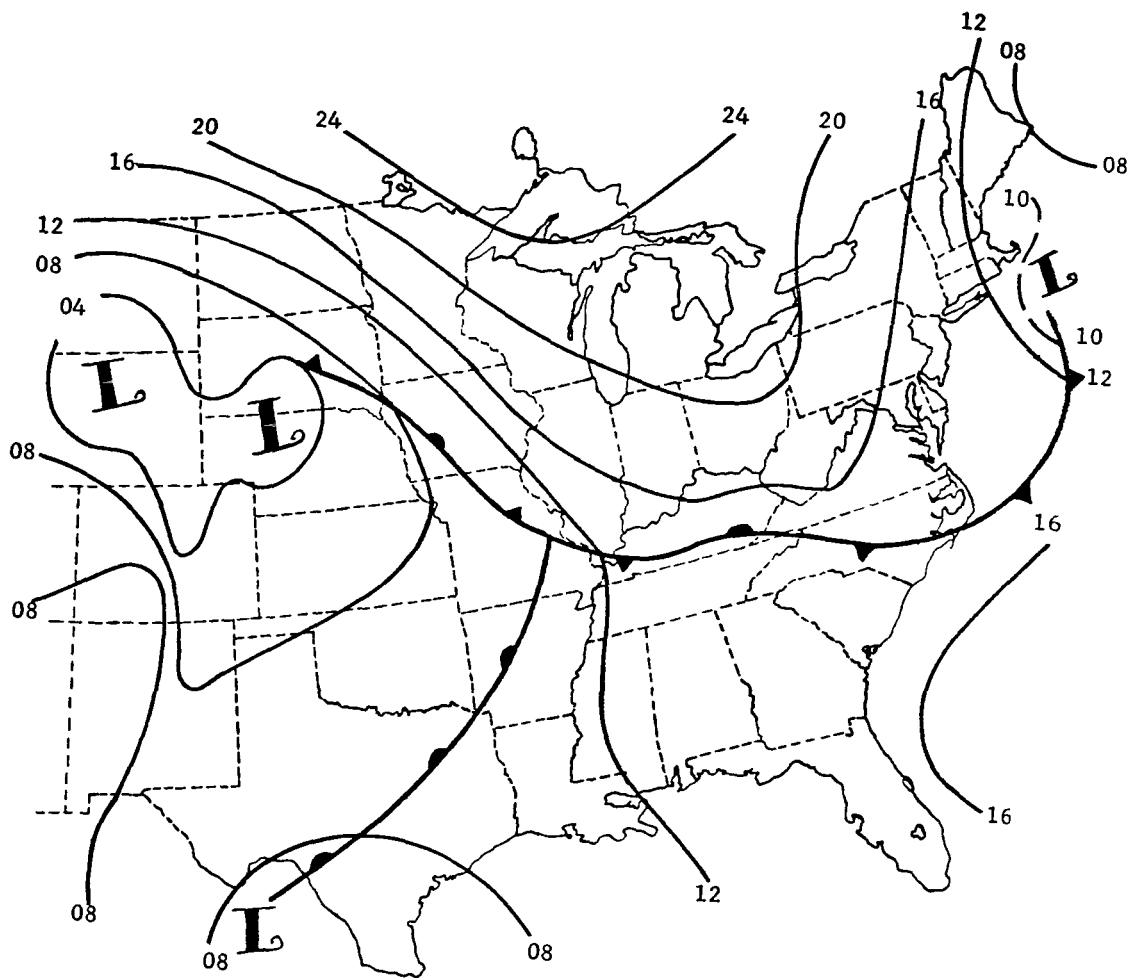


Figure 4. Synoptic chart for the surface at 1500 GMT, 7 May 1975.
(1200 GMT chart not available.)

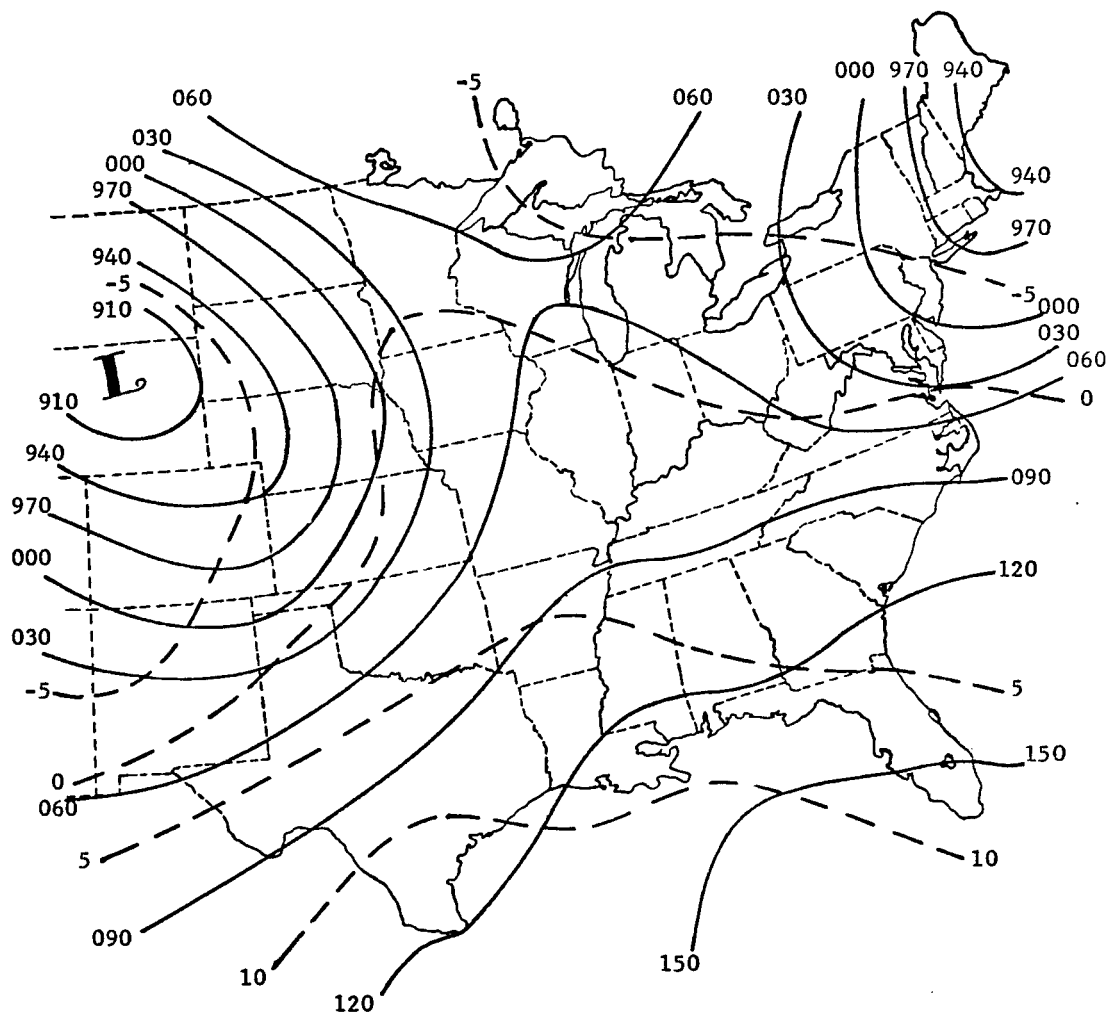


Figure 5. Synoptic chart for the 700 mb level at 1200 GMT, 7 May 1975.

REFERENCES

1. Fuelberg, H. E.: Reduction and Error Analysis of the AVE II Pilot Experiment Data. NASA Contractor Report CR-120496. Marshall Space Flight Center, Alabama, 1974.
2. Scoggins, J. R.; Fuelberg, H. E.; Carlson, R. D.; Phelps, R. W.; and Bellue, D. G.: A Compilation of Studies from the Atmospheric Variability Experiment (AVE). NASA Contract Report CR-2304. National Aeronautics and Space Administration, Washington, D.C., 1973.
3. Overall, J. W. and Scoggins, J. R.: Relationships Between Motion on Isentropic Surfaces from 3 h Rawinsonde Data and Radar Echoes. NASA Contractor Report CR-2558, National Aeronautics and Space Administration, Washington, D.C., 1975.
4. Wilson, G. S. and Scoggins, J. R.: Changes in the Structure of the Atmosphere in Areas of Convective Storms as Revealed in the AVE II Experiment. Paper presented at AMS Ninth Conference on Severe Storms, Norman, Oklahoma, October 21-23, 1975.
5. Scoggins, J. R. and Smith, O. E.: Data for the First NASA Atmospheric Variability Experiment (AVE I), Part I: Data Tabulation. NASA Technical Memorandum TM X-2938. Marshall Space Flight Center, Alabama, 1973.
6. Scoggins, J. R. and Smith, O. E.: Data for the First NASA Atmospheric Variability Experiment (AVE I), Part II: Graphical Presentation of Data. NASA Technical Memorandum TM X-2948. Marshall Space Flight Center, Alabama, 1973.
7. Scoggins, J. R. and Turner, R. E.: Data for NASA's AVE II Pilot Experiment, Part I: 25 mb Sounding Data and Synoptic Charts. NASA Technical Memorandum TM X-64877. Marshall Space Flight Center, Alabama, 1974.
8. Fuelberg, H. E. and Turner, R. E.: Pressure Contact Data for NASA's Atmospheric Variability Experiment (AVE II). NASA Technical Note TN D-7914. National Aeronautics and Space Administration, Washington, D.C., 1975.
9. Fuelberg, H. E. and Turner, R. E.: Data for NASA's AVE III Experiment: 25 mb Sounding Data and Synoptic Charts. NASA Technical Memorandum TM X-64938. Marshall Space Flight Center, Alabama, 1975.
10. Fucik, N. F. and Turner, R. E.: Data for NASA's AVE IV Experiment: 25 mb Sounding Data and Synoptic Charts. NASA Technical Memorandum TM X-64952. Marshall Space Flight Center, Alabama, 1975.
11. Fucik, N. F. and Turner, R. E.: Data for NASA's AVSSE I Experiment: 25 mb Sounding Data and Synoptic Charts. NASA Technical Memorandum. Marshall Space Flight Center, Alabama, 1975.

APPENDIX
SOUNDING DATA

These data are presented on microfiche as follows:

	Page
27 April 1975, 1200 GMT	20
6 May 1975, 1500 GMT	42
6 May 1975, 1800 GMT	63
6 May 1975, 2100 GMT	85
7 May 1975, 0000 GMT	108
7 May 1975, 0300 GMT	131
7 May 1975, 1200 GMT	153

**DATA FOR NASA'S AVSSE II EXPERIMENT:
25-MB SOUNDING DATA AND SYNOPTIC CHARTS**

By Nancy F. Fucik and Robert E. Turner

STATION NO. 232
ROOTHVILLE, LA

6 MAY 1975
1115 GMT

157 18. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.1	5.8	1.0	1037.4	23.9	22.5	170.0	5.2	-0.9	5.1	298.8	344.0	17.3	92.0	0.0	0.0
0.2	6.4	65.9	1070.0	23.7	22.5	26.1	3.7	-1.6	-3.3	299.2	344.9	17.5	93.3	1.0	345.
0.8	8.7	287.7	975.0	22.0	20.7	135.6	2.9	-2.0	2.1	299.5	341.5	16.0	92.0	0.9	342.
1.5	10.8	513.7	950.0	21.2	14.7	169.3	13.1	-2.4	12.9	300.2	330.1	11.2	66.7	1.3	343.
2.4	13.2	744.9	925.0	20.9	11.7	167.6	13.7	-2.9	13.4	301.9	327.5	9.4	55.8	2.0	345.
3.1	15.5	982.0	900.0	20.9	5.1	167.4	13.0	-2.8	12.7	303.9	321.5	6.3	36.5	2.6	346.
3.9	17.7	1225.4	875.0	20.7	2.5	169.3	10.6	-2.0	10.4	306.1	321.1	5.2	29.8	3.2	346.
4.7	20.2	1475.1	850.0	19.5	-2.3	167.6	9.2	-2.0	9.0	307.1	318.3	3.8	22.9	3.6	347.
5.5	22.5	1730.8	825.0	17.7	-5.0	148.3	9.4	-4.9	8.0	307.7	317.2	3.2	20.9	4.1	346.
6.4	25.1	1992.4	800.0	15.3	-3.3	141.8	9.4	-5.8	7.4	308.0	319.0	3.7	27.4	4.6	343.
7.4	27.4	2260.9	775.0	14.3	-4.7	151.2	9.2	-4.4	8.1	309.7	320.0	3.5	26.3	5.1	341.
8.3	30.1	2536.4	750.0	12.0	-3.9	174.0	9.3	-1.0	9.2	310.1	321.4	3.8	32.7	5.6	341.
9.2	32.8	2819.6	725.0	10.6	-2.2	192.6	11.5	2.5	11.2	311.7	324.9	4.5	40.5	6.1	343.
10.1	35.4	3111.0	700.0	8.7	-6.3	209.4	12.8	6.3	11.2	312.5	322.8	3.4	34.1	6.7	347.
11.1	38.0	3410.7	675.0	6.9	-9.7	227.5	12.4	9.1	8.4	313.7	322.0	2.7	29.4	7.2	351.
12.1	40.6	3719.9	650.0	4.4	-1.0	236.7	12.5	10.4	6.9	314.7	330.9	5.5	67.9	7.5	356.
13.0	43.4	4038.2	625.0	1.9	-3.9	247.4	14.0	12.9	5.4	315.2	329.0	4.6	65.6	7.9	1.
14.1	46.4	4366.5	600.0	-0.1	-14.4	265.2	18.7	18.6	1.6	316.2	322.7	2.1	33.0	8.2	8.
15.1	49.4	4705.5	575.0	-2.8	-18.3	272.3	23.4	23.4	-0.9	316.9	321.9	1.6	29.1	8.5	17.
16.3	52.3	5056.3	550.0	-5.4	-22.3	271.2	25.9	25.9	-0.6	317.7	321.5	1.2	25.0	9.0	28.
17.4	55.4	5419.0	525.0	-9.2	-24.5	268.5	26.2	26.2	0.7	317.5	320.8	1.0	27.4	10.0	37.
18.7	58.5	5794.1	500.0	-12.6	-24.5	269.6	26.1	26.1	0.2	317.8	321.2	1.0	36.2	11.4	45.
20.0	61.9	6183.0	475.0	-16.0	-29.0	271.7	26.4	26.4	-0.8	318.2	320.9	0.8	34.9	12.8	51.
21.3	65.2	6589.2	450.0	-17.0	-44.0	272.5	25.8	25.8	-1.1	321.8	322.4	0.2	7.5	14.5	57.
22.8	68.6	7016.0	425.0	-19.5	-47.1	271.2	24.9	24.9	-0.5	323.9	324.4	0.1	6.5	16.4	61.
24.3	72.0	7464.5	400.0	-21.8	-48.4	279.0	26.5	26.1	-4.1	326.6	327.0	0.1	6.9	18.3	65.
25.8	75.9	7936.4	375.0	-25.2	-39.1	285.8	30.8	29.7	-8.4	328.2	329.4	0.3	25.9	20.5	70.
27.4	79.9	8432.9	350.0	-29.5	-47.9	283.2	34.9	34.0	-8.0	329.0	329.5	0.1	14.7	23.1	74.
29.1	83.8	8957.1	325.0	-34.1	-51.7	282.5	38.1	37.2	-8.2	329.5	329.9	0.1	14.9	26.5	78.
31.1	88.0	9513.1	300.0	-37.9	-53.9	286.6	39.9	38.2	-11.4	331.8	332.1	0.1	16.7	30.7	82.
33.2	92.7	10107.2	275.0	-42.4	99.9	284.8	43.8	42.3	-11.2	333.8	999.9	99.9	999.9	35.5	85.
35.5	97.4	10744.6	250.0	-47.3	99.9	282.9	44.2	43.1	-9.8	335.8	999.9	99.9	999.9	41.4	88.
38.0	102.3	11433.2	225.0	-52.1	99.9	289.8	41.3	38.9	-14.0	338.7	999.9	99.9	999.9	47.5	91.
40.8	108.0	12186.0	200.0	-58.0	99.9	287.1	54.4	52.0	-16.0	341.0	999.9	99.9	999.9	55.2	93.
43.6	113.9	13014.5	175.0	-64.7	99.9	286.7	50.6	47.9	-16.2	343.1	999.9	99.9	999.9	64.0	95.
47.0	120.0	13949.4	150.0	-64.4	99.9	277.6	45.6*	45.2	-6.0	359.1	999.9	99.9	999.9	74.9	96.
51.3	127.3	15080.0	125.0	-62.4	99.9	280.0	41.6*	41.0	-7.3	361.9	999.9	99.9	999.9	86.7	96.
55.7	135.0	16441.5	100.0	-68.6	99.9	283.3	24.4*	23.8	-5.6	395.2	999.9	99.9	999.9	95.7	96.
61.4	142.7	18146.7	75.0	-71.1	99.9	264.8	10.8*	10.8	1.0	423.9	999.9	99.9	999.9	101.7	97.
69.5	150.7	20634.5	50.0	-58.4	99.9	7.3	2.1	-0.3	-2.1	506.0	999.9	99.9	999.9	102.5	97.
81.3	158.7	25096.9	25.0	-49.5	99.9	22.9	3.9	-1.5	-3.6	642.8	999.9	99.9	999.9	104.8	98.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 235
JACKSON, MISS

6 MAY 1975
1115 GMT

152 27. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIP DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T LG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.0	100.0	998.0	19.8	18.8	40.0	3.7	-2.4	-2.8	205.1	333.2	14.8	100.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.7	6.6	331.6	975.0	18.9	18.1	999.9	99.9	99.9	99.9	296.0	331.4	13.6	95.1	999.9	999.
1.6	8.7	525.2	950.0	18.2	17.4	999.9	99.9	99.9	99.9	297.4	332.3	13.3	95.2	999.9	999.
2.3	10.6	754.4	925.0	17.2	16.4	999.9	99.9	99.9	99.9	298.6	332.6	12.9	95.2	999.9	999.
3.2	12.7	988.3	900.0	15.6	14.8	214.2	9.4	5.3	7.8	299.1	333.6	11.9	95.0	0.7	360.
4.3	14.9	1227.5	875.0	13.8	12.8	215.8	8.0	4.7	6.5	299.5	328.1	10.7	93.8	1.3	16.
5.5	16.8	1472.2	850.0	12.6	11.4	220.5	11.3	7.3	8.6	300.7	327.8	10.0	92.3	1.9	23.
6.5	19.1	1723.2	825.0	11.3	10.0	209.7	14.2	7.0	12.3	301.8	327.4	9.4	91.5	2.8	28.
7.8	21.2	1979.5	800.0	9.1	6.3	194.9	15.5	4.0	15.0	301.8	322.5	7.5	82.3	3.7	26.
8.6	23.5	2242.0	775.0	6.9	4.4	195.0	15.7	4.1	15.1	302.1	320.9	6.8	83.9	4.5	24.
9.9	25.8	2511.8	750.0	6.1	3.3	196.1	16.1	4.4	15.4	304.0	322.3	6.5	82.4	5.7	22.
11.4	28.1	2788.9	725.0	3.8	1.1	195.8	17.1	4.7	16.5	304.4	320.7	5.7	82.4	7.2	21.
12.5	30.6	3073.8	700.0	2.2	-0.9	197.6	16.1	4.9	15.3	305.6	320.2	5.1	79.5	8.4	20.
13.6	33.2	3367.1	675.0	0.7	-1.7	201.9	14.5	5.4	13.5	307.0	321.4	5.0	84.0	9.2	20.
14.5	35.7	3670.3	650.0	-0.4	-2.2	207.2	15.5	7.1	13.8	309.2	323.7	5.0	87.1	10.1	20.
15.8	38.2	3993.5	625.0	-1.9	-3.6	210.4	13.4	6.8	11.6	310.8	324.7	4.7	88.5	11.3	21.
16.7	40.8	4308.1	600.0	-3.1	-5.1	212.3	13.7	7.3	11.6	313.1	326.2	4.4	86.1	12.0	22.
17.9	43.6	4643.6	575.0	-6.1	-9.1	217.1	14.9	9.0	11.9	313.2	323.3	3.3	79.2	12.9	23.
19.2	46.4	4990.6	550.0	-8.4	-12.3	223.5	16.6	11.4	12.1	314.5	322.8	2.7	73.2	14.2	24.
20.6	49.4	5350.5	525.0	-10.4	-14.6	225.3	16.1	11.5	11.3	316.2	323.5	2.4	71.2	15.4	26.
21.7	52.3	5724.5	500.0	-13.0	-17.2	224.8	16.6	11.7	11.8	317.3	323.6	2.0	70.7	16.5	27.
22.8	55.3	6114.0	475.0	-15.4	-19.8	224.0	17.1	11.9	12.3	319.0	324.4	1.7	69.1	17.6	28.
23.4	58.4	6519.9	450.0	-18.2	-22.6	226.7	16.1	11.7	11.0	320.4	325.6	1.4	68.2	18.2	29.
24.0	61.7	6944.5	425.0	-21.5	-26.0	229.7	12.7	9.7	8.2	321.5	325.1	1.1	66.9	18.7	30.
24.6	65.2	7388.3	400.0	-24.9	-29.4	229.4	9.4	7.2	6.1	322.6	325.4	0.8	65.8	19.1	30.
25.3	68.6	7855.9	375.0	-26.7	-31.4	233.9	7.7	6.3	4.6	326.3	328.9	0.7	64.0	19.3	30.
26.0	72.1	8350.6	350.0	-30.5	-35.2	248.7	7.7	7.2	2.8	327.6	329.5	0.5	62.7	19.6	31.
27.0	76.0	8873.0	325.0	-34.9	-39.7	291.0	5.3	4.9	-1.9	328.5	329.9	0.4	61.4	19.9	32.
28.0	80.1	9426.6	300.0	-39.4	99.9	293.7	6.9	6.3	-2.8	329.8	999.9	99.9	999.9	19.9	33.
29.6	84.3	10015.9	275.0	-44.3	99.9	288.0	14.1	13.4	-4.4	331.1	999.9	99.9	999.9	20.1	35.
31.8	88.6	10647.4	250.0	-49.8	99.9	286.5	23.6	22.6	-6.7	332.1	999.9	99.9	999.9	21.0	42.
34.5	93.6	11327.0	225.0	-56.1	99.9	289.3	29.1	27.5	-9.6	332.6	999.9	99.9	999.9	23.3	52.
36.9	98.6	12065.7	200.0	-62.0	99.9	281.6	38.2	37.4	-7.7	334.5	999.9	99.9	999.9	26.4	60.
39.8	104.2	12891.5	175.0	-65.8	99.9	273.8	57.3	57.2	-3.8	341.4	999.9	99.9	999.9	33.2	69.
43.3	110.4	13821.4	150.0	-62.2	99.9	287.4	47.6	45.4	-14.2	363.0	999.9	99.9	999.9	42.9	77.
47.2	117.3	14975.3	125.0	-57.0	99.9	271.1	29.9	29.9	-0.6	391.7	999.9	99.9	999.9	51.2	81.
51.0	125.5	15359.0	100.0	-66.6	99.9	279.2	21.5	21.2	-3.4	399.1	999.9	99.9	999.9	55.5	83.
57.2	135.0	18079.4	75.0	-65.8	99.9	285.3	6.1	5.9	-1.6	434.9	999.9	99.9	999.9	62.3	84.
67.3	145.0	20563.9	50.0	-61.8	99.9	74.7	8.4	-8.1	-2.2	497.9	999.9	99.9	999.9	62.9	86.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 240
LAKE CHARLES, LA

6 MAY 1975
1135 GMT

159 22. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.1	4.5	5.0	1005.9	24.4	22.7	150.0	5.2	-2.6	4.5	299.4	345.2	17.5	96.0	0.0	0.
0.1	4.9	56.8	1000.0	23.9	22.7	197.9	2.4	0.7	2.3	299.5	345.7	17.7	92.7	0.5	342.
0.8	6.6	279.3	975.0	23.3	22.3	195.4	4.5	1.2	4.4	301.0	347.7	17.8	94.5	0.7	340.
1.6	8.7	506.6	950.0	21.8	20.9	184.6	11.3	0.9	11.2	301.5	345.5	16.6	94.5	1.0	348.
2.2	10.6	738.8	925.0	20.2	19.6	191.7	12.6	2.6	12.4	302.1	344.0	15.7	96.0	1.5	354.
3.0	12.6	975.7	900.0	18.9	18.2	201.3	11.3	4.1	10.6	302.9	342.5	14.8	95.8	2.1	1.
3.8	14.9	1218.0	875.0	17.3	16.8	202.6	13.1	5.0	12.1	303.6	341.1	13.9	97.2	2.6	5.
4.7	16.7	1465.9	850.0	15.5	15.0	209.9	12.8	6.4	11.1	304.1	338.6	12.8	96.9	3.2	9.
5.5	19.0	1719.6	825.0	14.6	14.1	219.7	15.2	9.7	11.7	305.7	339.4	12.4	96.8	3.9	13.
6.4	21.1	1980.0	800.0	13.2	12.1	219.6	17.5	11.2	13.5	306.7	337.6	11.2	93.2	4.7	19.
7.2	23.5	2247.9	775.0	12.2	11.6	225.4	18.2	13.0	12.8	308.4	339.4	11.2	96.1	5.5	22.
7.9	25.8	2523.0	750.0	11.0	10.5	231.0	17.8	13.8	11.2	310.0	340.0	10.7	96.7	6.1	25.
8.4	28.1	2816.1	725.0	9.6	9.1	239.2	16.4	14.1	8.4	311.3	339.7	10.1	96.4	6.7	27.
9.0	30.7	3095.6	700.0	3.1	-25.0	248.3	15.9	14.8	5.9	306.2	312.0	2.0	23.4	7.1	30.
10.0	33.3	3387.7	675.0	0.2	-37.0	250.6	18.9	17.8	0.3	305.9	306.7	0.2	4.0	7.8	35.
11.0	35.9	3689.4	650.0	-0.5	-46.8	246.4	22.4	20.6	9.0	308.3	308.6	0.1	1.5	8.9	39.
11.9	38.7	4001.5	625.0	-2.3	-46.9	250.2	23.9	22.5	8.1	309.8	310.1	0.1	1.7	10.1	43.
12.9	41.2	4324.7	600.0	-3.4	-47.0	253.2	26.9	25.8	7.8	312.2	312.5	0.1	1.8	11.3	47.
14.0	44.3	4660.4	575.0	-4.7	-48.7	251.6	28.1	26.7	8.9	314.4	314.7	0.1	1.7	13.1	50.
15.3	47.3	5109.3	550.0	-5.6	-53.4	253.5	24.9	23.8	7.1	317.5	317.6	0.0	1.0	15.1	53.
16.7	50.3	5372.9	525.0	-6.9	-54.3	263.5	22.5	22.3	2.6	320.1	320.2	0.0	1.0	16.8	56.
18.1	53.5	5752.3	500.0	-9.0	-55.6	264.4	20.5	20.4	2.0	322.0	322.2	0.0	1.0	18.5	59.
19.7	56.7	6146.9	475.0	-12.1	-57.6	260.8	18.1	17.9	2.9	323.0	323.1	0.0	1.0	20.1	61.
21.1	60.1	6558.1	450.0	-14.8	-59.2	271.3	18.9	18.9	-0.4	324.6	324.7	0.0	1.0	21.5	62.
22.6	63.8	6987.9	425.0	-17.7	-59.2	280.7	21.8	21.4	-4.0	326.2	326.3	0.0	1.3	23.1	65.
24.2	67.4	7438.7	400.0	-21.1	-59.6	280.8	28.3	27.8	-5.3	327.5	327.6	0.0	1.6	24.8	68.
25.8	71.2	7911.7	375.0	-24.9	-60.5	279.7	30.0	29.5	-5.0	328.6	328.7	0.0	2.1	27.4	71.
27.8	75.3	8419.5	350.0	-29.0	-61.9	280.6	30.8	30.3	-5.7	329.6	329.7	0.0	2.5	30.7	75.
29.8	79.7	8935.8	325.0	-32.5	-63.4	279.0	35.8	35.3	-5.6	331.8	331.8	0.0	2.9	34.4	77.
31.8	84.2	9494.5	300.0	-37.0	-59.8	274.0	37.6	37.5	-2.6	333.1	333.3	0.0	7.2	38.5	80.
34.1	89.0	10089.4	275.0	-42.2	99.9	274.6	35.7	35.6	-2.9	334.2	999.9	99.9	999.9	43.1	81.
36.3	94.2	11728.3	250.0	-46.7	99.9	280.7	34.6	34.0	-6.5	336.7	999.9	99.9	999.9	48.0	83.
38.5	99.6	11419.6	225.0	-52.1	99.9	279.8	44.2	43.6	-7.5	338.7	999.9	99.9	999.9	53.0	85.
41.6	105.5	12172.7	200.0	-57.3	99.9	280.1	47.8	47.3	-8.4	342.1	999.9	99.9	999.9	61.4	87.
44.2	111.8	13008.6	175.0	-61.6	99.9	285.2	31.8	30.7	-8.3	348.3	999.9	99.9	999.9	67.9	88.
47.5	118.7	13951.9	150.0	-66.3	99.9	275.3	23.1	23.0	-2.1	355.6	999.9	99.9	999.9	72.8	89.
51.4	126.3	15049.1	125.0	-67.6	99.9	272.6	54.9*	54.8	-2.5	372.6	999.9	99.9	999.9	81.5	89.
56.1	134.7	16386.7	100.0	-68.4	99.9	266.2	28.7*	28.6	1.9	395.6	999.9	99.9	999.9	92.6	90.
61.4	142.7	18115.1	75.0	-71.5	99.9	12.5	4.7*	-1.0	-4.6	423.0	999.9	99.9	999.9	98.2	90.
69.5	151.7	22601.5	50.0	-60.8	99.9	24.5	1.7	-0.7	-1.6	500.2	999.9	99.9	999.9	97.6	91.
81.7	161.3	25039.1	25.0	-48.7	99.9	321.2	2.3	1.4	-1.8	644.6	999.9	99.9	999.9	98.1	92.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 24R
SHREVEPORT, LA

6 MAY 1975

1120 GMT

165 28. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.2	79.6	995.9	20.0	18.3	130.0	3.2	-2.5	2.1	295.3	330.2	13.5	90.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
0.5	6.7	263.0	975.0	21.0	17.9	295.8	0.8	0.7	-0.3	298.1	333.4	13.4	82.4	0.6	311.
1.4	6.3	488.6	950.0	21.2	15.7	135.4	6.1	-4.3	4.4	300.3	332.1	11.9	70.7	0.7	312.
2.2	10.9	720.4	925.0	21.3	15.1	154.7	9.2	-3.9	8.3	302.6	334.4	11.8	67.9	1.1	315.
3.0	13.2	957.7	900.0	19.3	16.5	177.6	9.8	-0.4	9.3	303.2	339.0	13.3	84.0	1.5	324.
3.8	15.4	1200.2	875.0	17.3	15.9	196.2	10.2	2.8	9.9	303.5	338.9	13.2	91.7	1.9	335.
4.6	17.6	1448.1	850.0	16.1	14.5	206.3	11.3	5.0	10.2	304.6	338.1	12.3	90.2	2.3	345.
5.5	20.0	1702.1	825.0	14.6	13.0	217.7	11.4	7.0	9.7	305.6	337.2	11.5	90.0	2.8	354.
6.5	22.2	1962.5	800.0	13.0	11.3	226.5	10.6	7.7	7.3	306.4	335.6	10.6	89.7	3.2	3.
7.4	24.7	2229.4	775.0	11.3	9.6	230.9	9.2	7.2	5.8	307.2	334.3	9.8	89.4	3.6	9.
8.2	27.0	2503.4	750.0	9.8	8.1	232.8	9.5	7.6	5.7	308.4	333.9	9.1	89.2	3.9	13.
9.1	29.6	2784.7	725.0	7.5	5.4	236.0	9.9	8.3	5.6	308.7	330.8	7.8	86.3	4.3	18.
10.0	32.2	3073.8	700.0	6.1	2.7	241.2	9.8	8.6	4.7	310.1	329.3	6.7	78.8	4.8	22.
11.0	35.0	3371.4	675.0	4.4	-2.9	246.2	8.4	7.7	3.4	311.1	324.6	4.6	58.9	5.2	27.
12.1	37.6	3678.7	650.0	2.9	-2.7	255.3	8.8	8.5	2.2	312.9	327.1	4.8	66.4	5.6	30.
13.1	40.3	3995.5	625.0	0.9	-6.3	266.8	10.5	10.5	0.6	314.0	325.6	3.8	58.4	6.0	34.
14.2	43.0	4322.6	600.0	-1.0	-11.3	270.8	11.5	11.5	-0.2	315.3	323.6	2.7	45.2	6.4	40.
15.4	45.9	4660.9	575.0	-3.4	-19.5	266.6	11.1	11.1	0.7	316.2	320.8	1.4	27.6	7.0	45.
16.6	48.9	5010.8	550.0	-5.5	-19.0	263.0	10.2	10.1	1.3	317.7	322.7	1.5	33.6	7.6	48.
17.8	51.8	5375.0	525.0	-6.6	-33.5	266.6	11.3	11.3	0.7	320.5	322.0	0.4	10.0	8.2	51.
19.1	55.0	5753.7	500.0	-9.7	-37.2	262.2	12.2	12.1	1.7	321.2	322.3	0.3	8.4	9.0	55.
20.5	58.3	6147.3	475.0	-12.8	-38.1	251.1	13.3	12.6	4.3	322.1	323.2	0.3	10.2	10.0	57.
21.8	61.7	6557.2	450.0	-15.9	-50.2	255.0	15.0	14.5	3.9	323.2	323.5	0.1	3.4	11.0	58.
23.2	65.3	6985.6	425.0	-18.6	-52.4	252.1	19.4	18.5	6.0	325.0	325.3	0.1	3.3	12.5	61.
24.7	68.8	7434.4	400.0	-22.0	-56.5	244.8	17.8	16.1	7.6	326.3	326.5	0.0	2.7	14.2	62.
26.0	72.5	7906.2	375.0	-25.5	-57.9	235.8	16.3	13.5	9.2	327.7	327.9	0.0	3.0	15.6	61.
27.7	76.7	8403.2	350.0	-28.8	-59.4	242.7	16.2	14.4	7.4	329.9	330.0	0.0	3.4	17.1	61.
29.2	80.9	8928.7	325.0	-33.4	-61.8	258.7	17.0	16.7	3.3	330.5	330.6	0.0	3.9	18.6	62.
30.9	85.2	9485.1	300.0	-38.4	99.9	267.3	20.2	20.2	0.9	331.2	999.9	99.9	999.9	20.2	64.
33.0	90.0	10077.5	275.0	-43.1	99.9	265.0	26.6	26.5	2.3	332.8	999.9	99.9	999.9	23.2	67.
35.0	95.2	10712.5	250.0	-48.4	99.9	261.6	27.4	27.1	4.0	334.1	999.9	99.9	999.9	26.3	69.
37.1	100.4	11398.9	225.0	-52.9	99.9	262.7	28.7	28.5	3.6	337.4	999.9	99.9	999.9	29.8	70.
39.4	106.4	12149.6	200.0	-58.1	99.9	267.4	25.6	25.5	1.1	340.8	999.9	99.9	999.9	33.5	72.
42.0	113.0	12980.6	175.0	-62.5	99.9	260.4	30.8	30.4	5.1	346.9	999.9	99.9	999.9	37.7	73.
45.7	120.3	13922.2	150.0	-66.5	99.9	253.5	28.6	27.4	8.1	355.5	999.9	99.9	999.9	44.2	74.
49.4	128.7	15020.8	125.0	-66.5	99.9	269.7	36.3	36.3	0.2	374.6	999.9	99.9	999.9	51.7	75.
54.0	137.8	16383.5	100.0	-63.2	99.9	264.7	35.0	34.9	3.3	405.7	999.9	99.9	999.9	62.7	77.
59.4	148.0	18126.8	75.0	-71.9	99.9	287.9	10.6	10.1	-3.2	422.2	999.9	99.9	999.9	67.5	76.
66.7	159.0	20612.5	50.0	-61.1	99.9	132.9	3.6	-2.6	2.5	459.4	999.9	99.9	999.9	67.0	80.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 250
BROWNSVILLE, TEX

6 MAY 1975
1115 GMT

157 35. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.7	7.0	1001.0	26.1	23.4	140.0	6.2	-4.0	4.7	301.7	350.2	18.4	85.0	0.0	0.
0.2	4.8	15.9	1000.0	25.9	23.5	142.7	3.6	-2.2	2.9	301.6	350.4	18.5	86.3	0.2	351.
0.8	6.7	239.4	975.0	24.0	23.9	232.1	1.2	0.9	0.7	302.0	353.6	19.6	99.3	0.6	324.
1.7	9.0	467.4	950.0	22.3	22.3	155.7	12.6	-5.2	11.5	302.3	350.5	18.2	100.7	1.0	330.
2.6	11.1	700.3	925.0	21.2	20.6	155.3	12.2	-4.3	11.4	303.3	348.5	16.9	97.1	1.7	333.
3.5	13.4	937.0	900.0	22.1	-2.8	183.8	8.8	0.6	8.7	304.8	315.3	3.6	18.7	2.3	337.
4.4	15.6	1185.6	875.0	28.6	-4.7	200.7	6.4	2.2	6.0	313.9	323.8	3.3	11.5	2.6	342.
5.4	17.9	1441.3	850.0	26.7	-5.1	202.2	4.4	1.7	4.0	314.6	324.0	3.1	11.9	2.8	346.
6.3	20.3	1702.9	825.0	23.8	-6.5	208.2	4.8	2.3	4.2	314.3	327.8	4.5	20.2	3.0	349.
7.4	22.7	1970.1	800.0	21.4	-1.4	217.2	4.3	2.0	3.4	314.5	327.5	4.3	21.8	3.2	353.
8.5	25.2	2243.5	775.0	19.3	-7.3	194.6	6.1	1.5	5.9	314.9	323.7	2.9	15.8	3.5	355.
9.5	27.5	2523.8	750.0	17.4	-12.0	196.9	8.2	2.4	7.9	315.7	322.1	2.0	12.3	4.0	357.
10.7	30.2	2811.3	725.0	14.8	-9.4	204.2	9.1	3.7	8.3	316.0	324.0	2.6	17.8	4.5	0.
11.8	32.9	3106.1	700.0	11.6	-2.4	209.9	9.1	4.5	7.9	315.9	329.8	4.6	37.9	5.1	3.
12.8	35.5	3409.4	675.0	8.9	2.4	224.9	9.4	6.6	6.6	316.6	336.5	6.8	63.4	5.6	7.
13.9	38.3	3720.8	650.0	6.5	-3.8	234.4	8.9	7.3	5.2	316.9	330.3	4.4	47.4	6.0	11.
15.0	40.9	4041.7	625.0	4.5	-11.0	246.4	8.6	7.9	3.5	317.9	326.2	2.7	31.5	6.4	14.
16.2	43.9	4372.6	600.0	1.8	-19.8	262.1	9.5	9.4	1.3	318.4	322.7	1.3	18.2	6.7	19.
17.4	47.0	4713.8	575.0	-1.1	-21.2	255.7	10.1	9.8	2.5	318.8	322.8	1.2	19.9	7.1	24.
18.7	50.1	5066.4	550.0	-3.9	-24.4	241.9	12.9	11.4	6.1	319.5	322.8	1.0	18.5	7.7	29.
20.1	53.1	5431.5	525.0	-6.6	-25.1	251.0	15.3	14.5	5.0	320.5	323.7	0.9	21.5	8.7	33.
21.3	56.3	5810.7	500.0	-9.3	-25.2	262.7	18.2	18.1	2.3	321.8	325.1	1.0	26.1	9.7	38.
22.7	59.8	6204.9	475.0	-12.6	-21.2	258.2	21.2	20.8	4.3	322.4	327.3	1.5	48.7	10.9	45.
24.0	63.3	6615.4	450.0	-15.3	-32.8	253.2	22.4	21.5	6.5	324.0	326.0	0.6	22.5	12.5	49.
25.6	66.9	7045.8	425.0	-16.5	-66.4	254.4	22.1	21.3	5.9	327.8	327.9	0.0	1.0	14.5	52.
27.3	70.6	7498.6	400.0	-20.3	-62.8	259.4	24.2	23.8	4.5	328.6	328.7	0.0	1.0	16.6	55.
28.9	74.7	7974.3	375.0	-22.4	-64.2	253.9	28.5	27.4	7.9	331.9	331.9	0.0	1.0	19.0	58.
30.5	78.8	8477.3	350.0	-26.2	-66.7	253.2	28.6	27.4	8.2	333.3	333.3	0.0	1.0	21.6	60.
32.6	83.2	9008.2	325.0	-30.9	-55.2	260.2	28.2	27.8	4.8	334.0	334.3	0.1	7.2	24.9	63.
34.5	87.5	9570.6	300.0	-35.9	-53.2	256.2	31.0	30.1	7.4	334.7	335.0	0.1	14.8	28.3	64.
36.7	92.4	10167.8	275.0	-41.5	99.9	257.1	29.0	28.3	6.5	335.1	999.9	99.9	999.9	32.0	66.
39.0	97.4	10809.2	250.0	-45.3	99.9	253.4	36.3	34.8	10.4	336.7	999.9	99.9	999.9	36.5	67.
41.6	102.8	11502.8	225.0	-51.6	99.9	260.0	36.4	35.8	6.3	339.5	999.9	99.9	999.9	42.2	68.
44.4	108.8	12256.3	200.0	-57.4	99.9	262.4	42.4	42.0	5.6	341.9	999.9	99.9	999.9	48.8	70.
47.6	115.2	13093.0	175.0	-59.8	99.9	264.1	38.1	37.9	3.9	351.3	999.9	99.9	999.9	56.9	71.
51.4	122.3	14048.0	150.0	-64.0	99.9	270.4	35.7	35.7	-0.2	359.8	999.9	99.9	999.9	65.7	74.
55.5	130.0	15155.1	125.0	-68.0	99.9	252.4	30.3	28.8	9.2	371.8	999.9	99.9	999.9	74.5	74.
60.7	138.0	16484.5	100.0	-71.7	99.9	294.5	21.0	19.1	-8.7	389.2	999.9	99.9	999.9	81.2	76.
66.5	146.0	18152.0	75.0	-78.6	99.9	255.0	9.1	8.8	2.4	408.0	999.9	99.9	999.9	84.3	78.
75.4	155.0	20616.8	50.0	-58.8	99.9	28.3	2.9	-1.4	-2.6	504.9	999.9	99.9	999.9	84.1	78.
99.9	95.5	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 255
VICTORIA, TEX

6 MAY 1975
1115 GMT

156 15. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	F POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.5	33.0	999.7	25.0	22.7	180.0	3.7	0.0	3.7	300.6	347.3	17.7	87.0	0.0	0.0
00.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.8	6.2	253.9	975.0	24.4	23.2	999.9	99.9	99.9	99.9	302.3	351.8	18.7	92.8	999.9	999.9
1.6	8.1	481.8	950.0	22.2	21.9	172.7	6.7	-0.8	6.6	302.1	348.9	17.7	97.9	0.6	348.
2.4	10.0	713.9	925.0	20.3	16.9	174.2	8.1	-0.8	8.1	301.8	337.2	13.2	80.7	0.9	350.
3.2	11.8	551.1	900.0	23.6	-2.2	164.2	8.7	-2.4	8.3	306.4	318.5	4.2	23.4	1.3	350.
4.0	13.8	1177.3	875.0	24.6	-9.4	166.6	7.0	-1.6	6.8	309.7	316.2	2.1	9.7	1.7	348.
4.8	15.7	1450.1	850.0	23.7	-11.7	198.6	4.1	1.3	3.9	311.2	316.9	1.8	8.5	2.0	350.
5.7	17.7	1709.2	825.0	22.2	-13.4	216.0	5.5	3.2	4.5	312.2	317.4	1.6	8.1	2.1	354.
6.5	19.8	1974.9	800.0	20.6	-14.4	222.6	7.1	4.8	5.2	313.3	318.3	1.6	8.3	2.4	359.
7.4	21.8	2247.1	775.0	18.0	-16.0	221.7	8.0	5.3	6.0	313.3	317.8	1.4	8.5	2.7	5.
8.4	24.1	2525.5	750.0	15.2	-17.7	229.3	7.3	5.5	4.8	313.2	317.3	1.3	8.8	3.1	11.
9.3	26.1	2810.9	725.0	12.8	-19.2	242.3	6.8	6.1	3.2	313.6	317.3	1.2	9.1	3.4	15.
10.3	28.5	3103.8	700.0	10.2	-20.8	257.6	7.7	7.5	1.6	313.9	317.3	1.0	9.3	3.6	21.
11.3	30.8	3404.2	675.0	7.4	-19.8	269.3	9.3	9.3	0.1	314.0	317.8	1.2	12.3	3.9	27.
12.2	33.3	3713.4	650.0	4.8	-19.0	276.8	11.5	11.4	-1.4	314.6	318.8	1.3	15.9	4.1	34.
13.2	35.7	4031.6	625.0	2.3	-17.9	271.0	14.3	14.3	-0.2	315.3	320.1	1.5	20.7	4.6	43.
14.2	38.2	4359.7	600.0	-0.2	-19.7	264.6	16.7	16.6	1.6	316.1	320.4	1.3	21.2	5.2	50.
15.3	40.7	4698.9	575.0	-2.7	-15.2	253.5	19.8	19.0	5.6	317.1	323.6	2.0	37.6	6.2	55.
16.3	43.3	5049.6	550.0	-5.5	-15.6	245.0	23.7	21.5	10.0	317.8	324.4	2.1	44.6	7.6	58.
17.4	46.1	5412.5	525.0	-8.3	-16.7	238.9	24.8	21.3	12.8	318.7	325.0	2.0	50.4	9.3	58.
18.7	49.1	5788.9	500.0	-11.6	-36.1	240.6	23.3	20.3	11.4	318.9	320.1	0.4	11.3	11.2	58.
19.9	51.9	6181.0	475.0	-13.0	-58.1	251.6	20.7	19.7	6.5	321.9	322.0	0.0	1.0	12.8	59.
21.3	55.0	6591.2	450.0	-15.6	-59.8	256.8	24.2	23.5	5.5	323.5	323.6	0.0	1.0	14.5	61.
22.6	58.0	7019.9	425.0	-18.9	-62.0	265.0	23.6	23.5	2.1	324.6	324.7	0.0	1.0	16.4	63.
23.9	61.4	7468.9	400.0	-21.7	-63.8	267.3	25.2	25.2	1.2	326.7	326.8	0.0	1.0	18.1	66.
25.6	65.0	7941.2	375.0	-25.1	-65.9	264.2	29.1	28.9	3.0	328.3	328.4	0.0	1.0	20.6	68.
27.0	68.3	8439.7	350.0	-29.0	-68.5	266.7	30.6	30.6	1.8	329.6	329.6	0.0	1.0	23.1	70.
28.7	72.0	8963.8	325.0	-33.0	-66.3	263.4	34.7	34.4	4.0	331.2	331.2	0.0	2.0	25.1	72.
31.4	76.2	9521.8	300.0	-37.5	-57.7	260.2	38.1	37.5	6.5	332.4	332.6	0.0	10.1	29.8	73.
32.2	80.4	10116.7	275.0	-41.8	99.9	261.9	39.4	39.0	5.6	334.6	999.9	99.9	999.9	34.3	74.
34.3	85.0	10754.5	250.0	-47.1	99.9	261.4	44.5	44.0	6.7	336.0	999.9	99.9	999.9	39.4	75.
36.6	89.8	11442.3	225.0	-53.3	99.9	264.5	50.5	50.3	4.9	336.9	999.9	99.9	999.9	45.7	76.
39.2	95.2	12191.5	200.0	-59.0	99.9	262.2	52.1	51.6	7.1	339.4	999.9	99.9	999.9	53.6	77.
42.3	100.8	13224.4	175.0	-61.2	99.9	266.8	46.5	46.5	2.6	349.0	999.9	99.9	999.9	62.4	78.
45.7	107.3	13977.9	150.0	-61.3	99.9	266.6	38.4	38.3	2.3	364.5	999.9	99.9	999.9	71.1	79.
50.0	114.7	15105.1	125.0	-64.3	99.9	268.4	32.9*	32.9	0.9	378.7	999.9	99.9	999.9	81.5	80.
54.9	123.3	16454.5	100.0	-70.3	99.9	256.2	17.8*	16.0	-7.9	392.0	999.9	99.9	999.9	89.7	82.
60.5	133.0	18125.9	75.0	-78.4	99.9	266.3	15.5	15.4	1.0	408.6	999.9	99.9	999.9	93.6	83.
69.2	143.7	20600.0	50.0	-60.2	99.9	297.3	8.2	7.3	-3.8	501.8	999.9	99.9	999.9	95.2	83.
82.6	155.0	25029.6	25.0	-51.0	99.9	48.0	5.1	-3.8	-3.4	638.1	999.9	99.9	999.9	95.4	85.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 260
STEPHENVILLE, TEX

6 MAY 1975

1115 GMT

155 16. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
00.0	9.6	399.0	956.5	20.7	19.0	180.0	7.2	0.0	7.2	299.6	238.2	14.7	90.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
0.2	10.2	458.4	950.0	20.8	19.4	277.6	1.4	1.4	-0.2	300.3	347.2	15.1	91.3	0.7	4.0
1.2	12.3	689.1	925.0	18.6	17.6	184.5	8.8	0.7	8.7	300.2	337.0	13.9	93.9	0.9	6.0
2.4	14.5	925.1	900.0	20.3	17.5	192.8	11.6	2.6	11.3	304.3	342.8	14.2	84.9	1.7	5.0
3.4	16.6	1170.4	875.0	24.1	-28.4	201.7	10.1	3.7	9.4	309.9	310.7	0.5	2.6	2.4	9.0
4.5	18.9	1422.5	850.0	22.9	-36.0	208.7	10.2	4.9	9.0	310.2	310.9	0.2	1.0	3.0	12.0
5.4	21.1	1680.6	825.0	21.0	-37.1	221.0	10.7	7.0	8.1	310.8	311.5	0.2	1.0	3.6	16.0
6.5	23.5	1945.0	800.0	19.0	-38.3	236.5	9.5	7.9	5.2	311.4	312.0	0.2	1.0	4.1	21.0
7.5	25.8	2215.9	775.0	17.2	-39.4	250.3	10.3	9.7	3.5	312.4	312.9	0.2	1.0	4.6	26.0
8.6	28.2	2493.6	750.0	14.8	-33.7	257.8	11.5	11.2	2.4	312.7	313.7	0.3	2.1	5.1	32.0
9.7	30.9	2778.3	725.0	12.2	-28.7	261.7	12.0	11.9	1.7	312.9	314.6	0.5	4.0	5.6	38.0
10.8	33.4	3070.4	700.0	9.4	-25.7	262.1	13.1	13.0	1.8	313.0	315.2	0.7	6.3	6.3	43.0
11.9	35.9	3370.1	675.0	6.9	-26.5	264.0	13.9	13.9	1.5	313.4	315.6	0.6	7.0	6.9	48.0
13.1	38.6	3678.2	650.0	4.1	-23.7	261.6	15.8	15.7	2.3	313.7	316.5	0.9	11.0	7.9	52.0
14.3	41.1	3994.9	625.0	0.9	-22.5	261.3	15.9	15.7	2.4	313.6	316.8	1.0	15.4	9.0	56.0
15.5	44.0	4320.8	600.0	-2.2	-20.1	259.5	18.2	17.9	2.3	313.7	317.9	1.3	23.8	10.0	59.0
16.7	46.9	4656.9	575.0	-5.4	-18.3	258.9	17.9	17.6	3.5	313.8	318.8	1.6	35.3	11.3	61.0
18.1	50.0	5003.9	550.0	-7.3	-24.7	249.3	13.3	12.5	4.7	315.5	318.5	0.9	23.3	12.7	63.0
19.4	52.9	5365.2	525.0	-9.5	-55.9	224.0	10.5	7.3	7.5	316.9	317.1	0.0	1.0	13.4	62.0
20.7	55.9	5739.7	500.0	-12.2	-57.6	226.4	11.6	8.4	8.0	318.1	318.3	0.0	1.0	14.3	61.0
22.1	59.1	6139.4	475.0	-14.3	-59.0	233.2	13.9	11.1	8.3	320.2	320.3	0.0	1.0	15.4	61.0
23.7	62.4	6537.9	450.0	-17.2	-60.8	229.3	14.8	11.2	9.6	321.6	321.7	0.0	1.0	16.6	60.0
25.2	65.9	6963.6	425.0	-20.5	-63.0	225.6	15.4	11.0	10.8	322.6	322.7	0.0	1.0	18.0	59.0
26.8	69.4	7408.8	400.0	-24.4	-65.5	225.6	16.8	12.8	10.9	323.3	323.3	0.0	1.0	19.5	58.0
28.5	73.0	7875.5	375.0	-27.9	-67.8	235.4	19.6	16.2	11.2	324.5	324.6	0.0	1.0	21.3	57.0
30.3	77.0	8367.6	350.0	-31.6	-70.3	245.3	24.5	22.3	10.2	326.0	326.0	0.0	1.0	23.6	58.0
32.0	81.0	8897.6	325.0	-35.8	-73.0	253.6	30.2	28.9	8.5	327.3	327.3	0.0	1.0	26.2	59.0
33.9	85.3	9440.0	300.0	-39.7	99.9	252.6	37.1	35.4	11.1	329.4	999.9	99.9	999.9	30.2	61.0
36.3	89.7	10030.1	275.0	-43.7	99.9	250.3	41.7	39.3	14.0	332.0	999.9	99.9	999.9	36.0	63.0
38.9	94.6	10662.8	250.0	-49.1	99.9	249.4	44.1	41.3	15.5	333.0	999.9	99.9	999.9	42.2	64.0
41.8	99.6	11346.1	225.0	-54.2	99.9	253.9	44.6	42.9	12.4	335.4	999.9	99.9	999.9	49.9	65.0
44.9	105.0	12097.1	200.0	-56.5	99.9	261.0	46.4	45.8	7.2	343.3	999.9	99.9	999.9	57.0	67.0
48.4	111.0	12937.6	175.0	-58.6	99.9	259.0	37.4	36.7	7.1	353.3	999.9	99.9	999.9	66.5	68.0
52.0	117.5	13997.6	150.0	-62.7	99.9	258.5	37.1*	36.4	7.4	362.0	999.9	99.9	999.9	74.0	69.0
56.2	125.0	15021.1	125.0	-63.3	99.9	263.9	37.9*	37.6	4.0	380.3	999.9	99.9	999.9	83.1	71.0
61.6	133.3	16393.3	100.0	-64.2	99.9	275.2	26.3*	26.2	-2.4	403.8	999.9	99.9	999.9	93.3	72.0
67.4	141.3	18142.4	75.0	-66.9	99.9	248.2	10.6*	9.8	3.9	432.6	999.9	99.9	999.9	100.5	73.0
76.2	150.3	20637.8	50.0	-60.5	99.9	68.9	10.4	-9.7	-3.7	501.0	999.9	99.9	999.9	100.5	74.0
89.9	159.5	25069.0	25.0	-50.1	99.9	27.3	4.8	-2.2	-4.3	640.8	999.9	99.9	999.9	98.9	75.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 261
DEL RIO. TFX

6 MAY 1975
1115 GWT

161 25 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.4	314.0	966.4	24.3	21.8	130.7	4.6	-3.5	3.0	302.7	348.7	17.3	86.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.5	10.7	464.4	950.0	22.6	21.7	286.4	1.4	1.4	-0.4	302.5	348.9	17.5	94.4	0.5	311.
1.3	13.1	697.0	925.0	21.1	20.3	173.9	6.6	-0.7	6.6	303.1	347.1	16.5	95.1	0.6	321.
2.3	15.4	935.2	900.0	20.3	19.4	175.6	11.2	-0.8	11.1	304.6	347.6	16.0	95.0	1.0	338.
3.2	17.8	1179.4	875.0	19.9	19.0	183.7	12.7	0.8	12.7	306.6	350.2	16.1	94.9	1.7	346.
4.1	20.3	1429.5	850.0	18.6	12.8	200.9	12.3	4.4	11.5	307.1	337.5	11.0	69.4	2.4	353.
4.9	22.6	1686.6	825.0	18.9	5.3	217.6	12.5	7.6	9.9	309.5	329.1	6.8	40.9	2.9	0.
5.9	25.2	1949.8	800.0	17.5	-9.3	246.0	10.2	9.3	4.2	310.1	317.4	2.4	15.2	3.3	9.
7.0	27.6	2219.3	775.0	15.0	-13.8	257.4	10.4	10.2	2.3	310.2	315.5	1.7	12.3	3.6	18.
8.0	30.2	2495.1	750.0	12.5	-20.7	268.2	10.8	10.8	0.3	310.3	313.4	1.0	8.1	4.0	27.
9.3	33.0	2778.1	725.0	10.9	-21.7	265.0	9.7	9.6	0.8	311.5	314.5	0.9	8.3	4.4	37.
10.3	35.6	3069.5	700.0	9.2	-22.7	247.7	10.3	9.6	3.9	312.8	315.7	0.9	8.5	4.8	41.
11.4	38.4	3369.1	675.0	6.6	-21.2	229.9	10.6	8.1	6.8	313.2	316.5	1.0	11.5	5.5	43.
12.5	41.1	3677.4	650.0	4.5	-22.5	215.6	12.7	7.4	10.4	314.1	317.3	1.0	11.9	6.3	43.
13.6	44.1	3954.8	625.0	1.3	-19.4	218.4	14.8	9.2	11.6	314.1	318.3	1.3	19.7	7.2	42.
14.7	47.1	4321.7	600.0	-1.3	-19.9	224.3	16.6	11.6	11.9	314.8	319.0	1.3	22.6	8.2	42.
15.9	50.2	4659.2	575.0	-4.1	-23.7	229.4	19.5	14.8	12.7	315.3	318.6	1.0	20.2	9.5	43.
17.1	53.3	5008.2	550.0	-6.1	-53.8	230.4	17.1	13.1	10.9	316.8	317.0	0.0	1.0	10.9	44.
18.4	56.4	5370.7	525.0	-8.3	-55.2	224.8	13.9	9.8	9.8	318.4	318.5	0.0	1.0	12.1	44.
19.8	59.8	5747.1	500.0	-11.2	-57.0	223.8	13.4	9.2	9.7	319.3	319.4	0.0	1.0	13.2	44.
21.3	63.3	6139.5	475.0	-13.8	-58.7	249.5	16.1	15.1	5.7	320.9	321.0	0.0	1.0	14.4	45.
22.6	66.7	6547.3	450.0	-16.3	-60.3	259.8	22.1	21.7	3.9	322.7	322.8	0.0	1.0	15.7	48.
24.0	70.4	6975.9	425.0	-18.2	-61.5	255.1	29.0	28.0	7.5	325.5	325.6	0.0	1.0	17.6	52.
25.6	74.0	7425.9	400.0	-21.3	-58.4	251.3	30.5	28.9	9.8	327.2	327.3	0.0	2.0	20.3	54.
27.4	78.2	7898.0	375.0	-25.5	-59.4	248.0	30.6	28.4	11.5	327.8	327.9	0.0	2.5	23.5	56.
29.3	82.0	8394.9	350.0	-28.9	-60.6	244.2	35.8	32.3	15.6	329.8	329.9	0.0	2.9	27.3	58.
31.3	86.3	8920.1	325.0	-33.5	-48.1	246.4	39.1	35.9	15.7	330.4	331.0	0.1	21.2	31.8	59.
33.4	90.8	9476.8	300.0	-38.1	-47.0	244.7	41.4	37.4	17.7	331.5	332.2	0.2	38.6	36.8	60.
35.4	95.7	10069.4	275.0	-43.2	99.9	243.4	41.1	36.7	18.4	332.6	999.9	99.9	999.9	41.8	60.
37.7	100.5	10703.9	250.0	-48.4	99.9	245.4	42.9	39.0	17.8	334.2	999.9	99.9	999.9	47.5	61.
40.3	106.0	11391.8	225.0	-51.9	99.9	251.6	47.9	45.5	15.2	339.0	999.9	99.9	999.9	53.9	62.
42.8	111.5	12146.6	200.0	-57.1	99.9	252.5	48.6	46.3	14.6	342.4	999.9	99.9	999.9	61.2	63.
45.9	117.8	12982.1	175.0	-61.5	99.9	252.8	48.1*	45.9	14.2	348.5	999.9	99.9	999.9	70.6	64.
49.3	124.7	13936.4	150.0	-61.7	99.9	255.7	43.8*	42.5	10.9	363.7	999.9	99.9	999.9	77.8	65.
53.5	132.0	15063.6	125.0	-63.3	99.9	255.4	43.8*	42.4	11.0	380.3	999.9	99.9	999.9	89.4	67.
58.4	140.0	16415.5	100.0	-67.4	99.9	278.1	28.6*	28.3	-4.0	397.5	999.9	99.9	999.9	98.8	69.
63.7	148.3	18128.5	75.0	-73.2	99.9	252.2	8.4*	8.0	2.6	419.6	999.9	99.9	999.9	104.6	70.
71.5	158.3	21591.9	50.0	-60.7	99.9	282.5	3.2	3.1	-0.7	500.4	999.9	99.9	999.9	104.1	71.
82.7	165.0	24957.4	25.0	-51.7	99.9	999.9	99.9	99.9	99.9	636.0	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 265
MIDLAND, TEX

6 MAY 1975

1115 GMT

157 17. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	11.7	873.0	907.6	12.8	-7.2	350.0	6.2	1.1	-6.1	294.3	301.3	2.4	24.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	12.3	944.3	900.0	15.6	-2.4	160.5	2.0	-0.7	1.8	298.1	308.2	3.6	28.9	0.9	171.
1.1	14.5	1182.8	875.0	14.9	-3.4	336.2	6.8	2.8	-6.3	299.7	309.4	3.4	28.0	0.9	170.
2.0	16.4	1427.9	850.0	15.1	-3.3	319.6	12.7	8.2	-9.6	302.4	312.8	3.6	28.5	1.5	163.
2.9	18.6	1680.8	825.0	15.3	-2.8	268.3	11.7	11.1	-3.7	305.3	310.2	3.8	28.5	2.1	151.
3.9	20.7	1940.7	800.0	13.8	-4.1	262.9	10.9	10.8	1.4	306.3	316.6	3.5	28.5	2.5	138.
4.9	22.9	2206.9	775.0	11.3	-5.8	263.8	12.7	12.7	1.4	306.4	315.8	3.2	29.7	2.9	127.
5.7	25.2	2479.5	750.0	9.0	-7.7	256.6	13.3	13.0	3.1	306.7	315.2	2.9	29.8	3.4	119.
6.6	27.4	2759.2	725.0	7.0	-9.4	252.4	17.0	16.2	5.1	307.5	315.2	2.6	29.8	4.0	111.
7.5	29.6	3046.6	700.0	5.1	-10.4	238.8	16.6	14.2	8.6	308.4	315.9	2.5	31.6	4.7	103.
8.5	32.3	3342.2	675.0	2.8	-11.6	225.3	16.5	11.7	11.6	309.0	316.1	2.3	33.7	5.4	94.
9.7	34.9	3646.3	650.0	0.5	-13.1	217.2	17.1	10.3	13.6	309.8	316.3	2.1	35.1	6.2	86.
10.7	37.3	3960.0	625.0	-1.9	-14.3	210.5	16.8	8.5	14.5	310.5	316.7	2.0	38.1	6.9	79.
11.0	40.3	4283.1	600.0	-4.3	-15.2	205.5	18.2	7.8	16.5	311.3	317.4	1.9	42.1	7.7	72.
13.1	42.6	4618.0	575.0	-5.5	-18.3	209.3	23.7	11.5	20.8	313.7	318.7	1.6	36.1	8.7	65.
14.3	45.4	4965.2	550.0	-8.1	-23.6	212.7	24.1	13.0	20.3	314.6	318.0	1.0	27.3	10.4	59.
15.5	48.4	5324.3	525.0	-11.4	-26.4	219.0	22.3	14.0	17.3	314.8	317.6	0.8	27.4	11.9	56.
16.8	51.3	5697.0	500.0	-13.1	-29.0	232.1	21.9	17.3	13.5	317.2	319.5	0.7	24.6	13.5	55.
18.1	54.4	6086.7	475.0	-14.6	-31.8	238.3	24.2	20.6	12.7	319.9	321.8	0.6	21.6	15.3	55.
19.4	57.4	6493.5	450.0	-18.1	-34.6	237.8	26.5	22.4	14.1	320.5	322.0	0.4	21.7	17.3	55.
20.8	60.9	6917.0	425.0	-22.4	-38.3	234.3	25.7	20.8	15.1	320.2	321.4	0.3	22.0	19.5	55.
22.4	64.3	7359.2	400.0	-25.3	-40.6	235.3	31.4	25.8	17.9	322.1	323.1	0.3	22.1	22.3	55.
24.1	67.8	7825.2	375.0	-28.6	-43.5	244.0	35.1	31.5	15.4	323.6	324.4	0.2	22.3	25.5	56.
26.0	71.4	8316.1	350.0	-31.7	-46.1	243.1	40.1	35.8	18.2	325.9	326.5	0.2	22.5	29.7	57.
27.9	75.5	8835.9	325.0	-35.7	-49.4	239.2	42.0	36.1	21.5	327.4	327.9	0.1	22.7	34.7	58.
30.0	79.8	9387.3	300.0	-40.3	-52.7	237.7	42.1	35.6	22.5	328.6	328.6	99.9	99.9	39.8	58.
32.2	84.2	9974.5	275.0	-45.2	-55.9	240.6	42.4	36.9	20.8	329.7	329.7	99.9	99.9	45.3	56.
34.5	88.8	10604.1	250.0	-49.7	-59.9	244.0	41.9	37.7	18.4	332.2	332.2	99.9	99.9	51.3	58.
37.0	94.0	11288.1	225.0	-53.0	-63.0	246.9	42.7*	39.3	16.8	337.3	337.3	99.9	99.9	57.5	59.
40.1	99.3	12040.5	200.0	-57.1	-66.9	243.6	45.9*	41.1	20.4	342.4	342.4	99.9	99.9	66.2	60.
43.2	105.5	12882.4	175.0	-58.7	-69.9	249.6	39.2*	36.8	13.7	353.1	353.1	99.9	99.9	74.0	61.
46.4	112.0	13847.0	150.0	-59.3	-72.9	254.6	37.1*	35.8	9.8	368.0	368.0	99.9	99.9	81.1	61.
50.3	119.7	14981.7	125.0	-62.4	-75.9	259.1	35.6*	35.0	6.7	382.0	382.0	99.9	99.9	89.9	63.
55.2	128.7	16344.2	100.0	-65.8	-78.9	256.3	28.7*	27.9	6.8	400.7	400.7	99.9	99.9	99.3	64.
61.2	138.5	18092.4	75.0	-65.6	-81.9	55.5	5.0*	-4.1	-2.9	435.4	435.4	99.9	99.9	105.8	65.
69.9	149.5	20595.0	50.0	-60.5	-84.9	65.3	3.6*	-3.3	-1.5	500.9	500.9	99.9	99.9	104.3	65.
83.9	162.5	25031.0	25.0	-50.1	-87.9	342.1	6.3	1.9	-6.0	640.8	640.8	99.9	99.9	103.2	67.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 270
EL PASO, TEX

6 MAY 1975
1115 GMT

148 16. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	17.2	1193.0	876.0	10.3	-11.6	30.0	3.2	-1.6	-2.8	294.6	299.8	1.8	20.7	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.0	17.3	1202.6	875.0	10.4	-11.4	25.8	3.2	-1.4	-2.9	294.9	300.2	1.8	20.3	0.0	342.
0.9	19.7	1443.9	850.0	9.9	-10.0	330.2	5.4	2.7	-4.7	296.8	302.9	2.1	23.5	7.2	186.
1.8	22.0	1690.6	825.0	7.6	-11.0	322.1	7.0	4.3	-5.6	296.9	302.7	2.0	25.2	0.5	153.
2.6	24.6	1943.1	800.0	5.5	-12.0	316.7	8.2	5.6	-6.0	297.3	302.8	1.9	27.0	0.8	148.
3.5	26.9	2201.3	775.0	3.2	-13.5	311.6	10.2	7.6	-6.7	297.4	302.6	1.7	28.1	1.3	143.
4.2	29.6	2465.8	750.0	0.7	-13.2	292.1	12.6	11.6	-4.7	297.6	303.0	1.8	34.6	1.7	139.
5.2	32.2	2737.4	725.0	-0.3	-8.6	259.9	21.5	21.1	3.8	299.4	307.4	2.8	53.7	2.3	121.
6.4	35.0	3018.0	700.0	-1.2	-9.8	234.7	21.6	17.6	12.4	301.5	309.1	2.6	51.6	3.7	112.
7.3	37.5	3307.8	675.0	-2.5	-14.0	233.3	25.1	20.1	15.0	303.1	308.8	1.9	40.7	4.7	90.
8.3	40.3	3605.9	650.0	-4.9	-18.9	235.8	28.8	23.8	16.2	303.6	307.6	1.3	32.2	6.1	81.
9.3	43.0	3913.5	625.0	-6.0	-19.9	241.9	31.4	27.7	14.8	305.7	309.6	1.3	32.7	7.8	75.
10.2	46.0	4232.6	600.0	-6.9	-27.3	245.9	31.3	28.5	12.8	308.2	310.4	0.7	17.8	9.5	74.
11.2	49.0	4564.9	575.0	-6.9	-30.2	248.5	30.2	28.1	11.1	312.0	313.8	0.5	13.5	11.3	72.
12.4	51.9	4911.0	550.0	-8.2	-31.2	252.5	28.8	27.5	8.7	314.4	316.1	0.5	13.6	13.3	72.
13.6	55.1	5269.9	525.0	-11.3	-33.6	254.4	28.0	26.9	7.5	314.8	316.2	0.4	13.8	15.3	72.
14.9	58.1	5642.7	500.0	-13.3	-35.1	251.0	30.3	28.6	9.9	316.8	318.1	0.4	14.0	17.7	73.
16.2	61.4	6031.7	475.0	-15.3	-36.6	247.4	28.3	26.2	10.9	319.0	320.2	0.3	14.1	20.0	72.
17.5	64.9	6438.2	450.0	-17.8	-38.5	246.8	28.1	25.9	11.1	320.8	321.9	0.3	14.3	22.2	72.
18.9	68.3	6863.2	425.0	-21.0	-40.9	242.7	29.3	26.0	13.4	322.0	322.9	0.2	14.6	24.5	71.
20.1	71.7	7317.7	400.0	-24.6	-43.7	239.4	29.8	25.7	15.2	322.9	323.6	0.2	14.9	26.7	70.
21.4	75.5	7773.5	375.0	-29.0	-45.8	236.2	26.8	22.2	14.9	323.2	323.8	0.2	17.8	28.8	69.
23.1	79.5	8262.3	350.0	-33.3	-48.7	237.1	29.1	24.5	15.8	323.7	324.2	0.1	19.6	31.5	68.
24.8	83.5	8777.5	325.0	-38.2	-52.7	236.5	26.2	21.9	14.5	323.9	324.2	0.1	19.9	34.3	67.
26.8	87.7	9323.2	300.0	-42.5	99.9	232.7	27.7	22.0	16.8	325.4	999.9	99.9	99.9	37.3	66.
28.8	92.2	9905.9	275.0	-46.2	99.9	237.9	34.3	29.0	18.2	328.4	999.9	99.9	99.9	41.2	65.
31.0	96.8	10534.4	250.0	-50.0	99.9	239.2	42.0	36.1	21.5	331.8	999.9	99.9	99.9	46.2	64.
33.4	101.8	11216.3	225.0	-53.8	99.9	242.6	48.2	42.7	22.2	336.0	999.9	99.9	99.9	52.6	64.
35.9	107.4	11966.0	200.0	-57.5	99.9	241.8	44.7*	39.4	21.1	341.8	999.9	99.9	99.9	59.8	64.
38.8	113.3	12807.3	175.0	-58.1	99.9	246.9	41.5*	38.1	16.2	354.0	999.9	99.9	99.9	66.9	64.
42.1	119.5	13774.2	150.0	-58.7	99.9	245.6	40.5*	36.9	16.7	368.9	999.9	99.9	99.9	75.5	64.
45.9	126.7	14912.5	125.0	-61.2	99.9	250.3	47.3*	44.5	15.9	384.1	999.9	99.9	99.9	85.5	64.
50.7	134.7	16298.3	100.0	-61.6	99.9	257.8	41.3*	40.4	8.7	408.7	999.9	99.9	99.9	95.5	60.
55.8	142.3	19070.0	75.0	-66.1	99.9	247.0	11.7*	10.8	4.6	434.4	999.9	99.9	99.9	101.7	65.
63.9	151.3	20579.7	50.0	-60.5	99.9	163.3	1.9	-0.5	1.8	501.1	999.9	99.9	99.9	100.6	65.
76.0	160.5	25002.0	25.0	-51.3	99.9	330.3	5.6	2.8	-4.9	637.5	999.9	99.9	99.9	99.5	67.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 327
NASHVILLE, TENN

6 MAY 1975
1115 GMT

159 32. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.5	180.0	990.6	13.1	12.8	170.0	3.1	-0.5	3.1	288.3	312.4	9.4	98.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.7	7.9	314.5	975.0	15.8	12.7	260.6	2.1	2.1	0.3	292.3	317.1	9.5	81.8	0.4	358.
1.6	10.1	535.8	950.0	16.3	11.2	224.7	9.2	6.4	6.5	294.5	318.4	8.9	71.8	0.7	18.
2.6	12.2	763.0	925.0	16.3	8.8	226.2	11.4	8.2	7.9	297.0	317.8	7.7	60.9	1.2	31.
3.5	14.5	996.2	900.0	15.3	10.3	233.4	8.8	7.1	5.3	298.5	322.2	8.8	72.0	1.8	37.
4.6	16.6	1234.9	875.0	14.1	7.8	229.0	8.1	6.1	5.3	299.5	320.5	7.7	66.6	2.3	41.
5.6	19.0	1479.1	850.0	12.7	5.1	227.5	8.0	5.9	5.4	300.4	318.3	6.5	59.7	2.8	42.
6.6	21.3	1724.6	825.0	11.4	5.4	234.0	7.3	5.9	4.3	301.5	320.5	6.9	66.8	3.3	43.
7.7	23.8	1986.3	800.0	9.6	3.8	242.7	6.5	5.5	3.0	302.3	319.9	6.3	67.0	3.7	45.
8.8	26.1	2249.1	775.0	7.8	0.7	262.0	5.6	5.6	0.8	302.9	317.6	5.2	60.7	4.0	47.
10.0	28.7	2519.1	750.0	6.5	-3.2	278.8	6.4	6.3	-1.0	304.2	315.8	4.0	49.9	4.4	51.
11.1	31.3	2756.7	725.0	4.7	-3.0	287.1	7.3	7.0	-2.2	305.2	317.4	4.2	57.2	4.7	56.
12.2	34.0	3082.2	700.0	3.2	-3.8	285.3	8.3	8.0	-2.2	306.5	318.6	4.1	60.2	5.0	60.
13.5	36.6	3375.7	675.0	0.4	-5.1	277.9	8.5	8.4	-1.2	306.6	318.0	3.9	66.4	5.5	65.
14.7	39.4	3677.1	650.0	-2.3	-9.0	278.7	9.2	9.1	-1.4	306.8	315.6	3.0	59.7	6.1	68.
15.9	42.1	3987.5	625.0	-4.7	-12.9	289.3	11.3	10.6	-3.7	307.3	314.1	2.3	52.5	6.7	72.
17.2	45.1	4307.6	600.0	-7.2	-15.6	296.4	13.2	11.8	-5.9	318.0	313.8	1.9	51.0	7.4	76.
18.5	48.1	4638.1	575.0	-8.9	-21.2	299.3	16.0	14.0	-7.8	309.7	313.5	1.2	36.2	8.3	82.
19.7	51.1	4980.6	550.0	-11.7	-23.7	303.1	16.6	13.9	-9.0	310.3	313.6	1.0	36.0	9.3	87.
21.1	54.4	5335.7	525.0	-13.5	-26.8	307.1	18.1	14.4	-10.9	312.2	314.9	0.8	31.6	10.4	91.
22.7	57.6	5706.3	500.0	-14.8	-28.9	308.7	17.9	13.9	-11.2	315.0	317.4	0.7	28.9	11.8	96.
24.2	61.1	6093.0	475.0	-16.4	-30.2	312.6	18.4	13.6	-12.5	317.7	319.9	0.6	29.1	13.2	100.
25.8	64.7	6498.5	450.0	-18.4	-30.6	314.8	20.7	14.7	-14.6	320.2	322.4	0.7	33.1	14.9	105.
27.4	68.2	6922.5	425.0	-21.8	-33.7	311.1	21.5	16.2	-14.1	321.1	322.8	0.5	32.7	16.6	108.
29.2	71.9	7365.9	400.0	-25.4	-37.0	307.5	20.7	16.4	-12.6	321.9	323.3	0.4	32.7	18.8	110.
31.0	76.0	7831.0	375.0	-28.6	-40.1	304.0	20.4	16.9	-11.4	323.7	324.8	0.3	31.8	20.9	112.
33.0	80.1	8321.0	350.0	-32.7	-43.9	297.3	22.0	19.5	-10.1	324.6	325.4	0.2	31.8	23.2	113.
35.0	84.5	8839.6	325.0	-36.9	-47.5	293.8	23.1	21.1	-9.3	325.8	326.4	0.2	31.8	26.1	113.
37.2	89.0	9387.7	300.0	-40.9	-49.9	291.1	24.3	22.7	-8.8	327.7	999.9	99.9	999.9	29.3	113.
39.6	94.0	9973.3	275.0	-45.6	-49.9	287.0	28.9	27.7	-8.5	329.1	999.9	99.9	999.9	33.0	113.
42.2	99.0	10601.6	250.0	-50.9	-49.9	284.9	31.9	30.8	-8.2	330.4	999.9	99.9	999.9	37.8	112.
44.8	104.5	11279.7	225.0	-55.8	-49.9	287.2	35.4	33.8	-10.5	333.1	999.9	99.9	999.9	43.2	111.
47.7	110.6	12019.5	200.0	-61.6	-49.9	291.2	32.6	30.4	-11.8	335.3	999.9	99.9	999.9	49.3	110.
50.9	117.0	12837.9	175.0	-66.5	-49.9	300.5	29.5	25.4	-14.9	340.2	999.9	99.9	999.9	55.8	111.
54.6	124.3	13768.6	150.0	-64.3	-49.9	307.0	33.1	26.4	-19.9	359.4	999.9	99.9	999.9	63.7	112.
59.0	132.0	14883.8	125.0	-62.7	-49.9	290.6	28.7	26.8	-10.1	381.5	999.9	99.9	999.9	71.4	113.
64.2	140.0	16273.2	100.0	-61.6	-49.9	283.6	26.3	25.6	-6.2	408.7	999.9	99.9	999.9	78.1	112.
70.3	148.3	18061.2	75.0	-61.2	-49.9	277.9	12.0	11.9	-1.6	444.5	999.9	99.9	999.9	83.4	111.
79.0	157.0	20574.6	50.0	-59.5	-49.9	81.9	4.3	-4.3	-0.6	503.3	999.9	99.9	999.9	88.9	112.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 140
LITTLE ROCK, ARK

6 MAY 1975

1115 GMT

157 25. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.4	79.0	997.3	18.9	16.7	180.0	1.5	0.0	1.5	293.9	325.3	12.1	87.0	0.0	0.0
0.6	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9	999.9	999.9	999.9
0.6	8.9	275.3	975.0	21.2	15.9	288.3	2.9	2.8	-0.9	298.1	329.3	11.8	71.8	0.4	14.0
1.1	11.2	500.9	950.0	20.7	19.4	212.6	8.8	4.8	7.4	300.2	340.3	15.2	92.5	0.5	25.0
1.8	13.6	732.2	925.0	20.0	19.2	206.8	16.2	7.3	14.5	301.9	342.7	15.4	94.9	1.1	25.0
2.5	15.9	969.1	900.0	18.4	17.5	211.7	15.5	8.2	13.2	302.3	340.2	14.1	94.5	1.7	26.0
3.1	18.3	1211.1	875.0	17.2	15.6	211.6	15.2	8.0	13.0	303.4	338.1	12.9	90.1	2.4	28.0
3.8	20.9	1458.9	850.0	16.0	14.1	209.9	15.4	7.4	13.5	304.5	337.2	12.0	88.2	3.0	29.0
4.5	23.2	1712.9	825.0	14.5	12.6	203.2	13.7	5.4	12.6	305.4	336.1	11.2	86.4	3.6	28.0
5.2	25.7	1973.2	800.0	13.2	8.8	204.2	12.1	5.0	11.1	306.4	331.2	8.9	74.6	4.2	27.0
6.0	28.3	2240.3	775.0	12.0	7.6	203.8	9.1	3.7	8.4	307.8	331.7	8.5	74.5	4.7	27.0
6.7	31.1	2514.4	750.0	9.7	7.6	207.9	6.6	3.1	5.8	308.3	333.0	8.8	87.1	5.0	27.0
7.6	33.9	2795.4	725.0	7.1	6.2	224.8	6.1	4.3	4.3	308.3	331.5	8.2	94.0	5.3	27.0
8.4	36.5	3084.6	700.0	6.3	4.3	237.9	6.4	5.4	3.4	310.5	331.8	7.5	86.7	5.6	29.0
9.2	39.3	3382.2	675.0	3.8	2.1	237.7	5.9	5.0	3.2	310.7	329.8	6.6	88.9	5.8	30.0
10.0	42.1	3687.8	650.0	1.0	-0.3	235.1	4.8	3.9	2.7	310.9	327.7	5.8	91.0	6.1	31.0
10.9	45.1	4002.1	625.0	-1.8	-4.5	240.2	4.8	4.1	2.4	311.0	324.0	4.4	81.5	6.3	32.0
11.8	48.3	4326.6	600.0	-3.4	-10.0	242.9	5.2	4.7	2.4	312.6	321.6	3.0	60.1	6.5	34.0
12.7	51.3	4661.7	575.0	-5.9	-19.2	239.0	5.8	4.9	3.0	313.2	317.8	1.5	33.9	6.8	35.0
13.5	54.5	5008.2	550.0	-8.7	-20.3	250.4	6.7	6.3	2.3	313.8	318.3	1.4	39.6	7.1	36.0
14.5	57.6	5366.8	525.0	-11.8	-14.2	269.3	9.5	9.5	0.1	314.6	322.1	2.4	82.2	7.4	38.0
15.6	61.0	5740.1	500.0	-12.0	-23.3	279.8	10.8	10.6	-1.8	318.5	321.7	1.0	31.8	7.8	43.0
16.7	64.6	6131.4	475.0	-14.2	-42.2	280.7	9.7	9.6	-1.8	320.4	321.1	0.2	7.1	8.2	47.0
17.8	68.0	6539.3	450.0	-17.3	-43.9	273.5	10.0	10.0	-0.6	321.5	322.1	0.2	7.7	8.6	50.0
19.1	71.6	6964.8	425.0	-20.7	-56.7	269.4	14.1	14.1	0.1	322.3	322.6	0.1	3.3	9.2	53.0
20.3	75.4	7410.6	400.0	-23.6	-65.0	267.6	17.4	17.4	0.7	324.2	324.2	0.0	1.0	10.2	57.0
21.7	79.5	7878.6	375.0	-27.6	-66.2	257.8	17.7	17.3	3.7	325.0	325.1	0.0	1.2	11.6	61.0
23.2	83.5	8371.4	350.0	-31.3	-53.0	255.2	16.6	16.0	4.2	326.5	326.8	0.1	9.7	13.2	62.0
24.9	87.8	8892.3	325.0	-35.2	-61.6	248.3	18.7	17.4	6.9	328.1	328.2	0.0	4.7	14.8	64.0
26.8	92.4	9445.1	300.0	-39.6	99.9	255.2	15.0	14.5	3.8	329.5	999.9	99.9	999.9	16.8	64.0
28.7	97.0	10034.0	275.0	-44.1	99.9	245.1	18.4	16.7	7.8	331.4	999.9	99.9	999.9	18.7	65.0
31.0	102.0	10666.0	250.0	-49.3	99.9	244.7	21.3	19.3	9.1	332.8	999.9	99.9	999.9	21.5	65.0
33.4	107.6	11349.1	225.0	-54.1	99.9	248.7	21.0	19.6	7.6	335.6	999.9	99.9	999.9	24.7	65.0
36.2	113.3	12095.9	200.0	-59.6	99.9	242.9	19.4	17.2	8.8	338.4	999.9	99.9	999.9	28.0	65.0
39.2	119.3	12920.0	175.0	-64.9	99.9	251.7	18.9	17.9	5.9	342.9	999.9	99.9	999.9	31.3	65.0
42.6	126.0	13853.8	150.0	-67.1	99.9	264.6	27.8	27.6	2.6	354.5	999.9	99.9	999.9	35.6	67.0
46.7	133.0	14954.6	125.0	-65.1	99.9	273.4	30.5	30.5	-1.8	377.1	999.9	99.9	999.9	42.8	70.0
51.0	140.0	16316.6	100.0	-64.1	99.9	274.1	20.1	20.0	-1.4	403.8	999.9	99.9	999.9	48.7	73.0
57.2	147.3	18084.8	75.0	-61.5	99.9	312.5	11.7	8.6	-7.9	444.0	999.9	99.9	999.9	54.6	77.0
64.7	154.7	20610.7	50.0	-59.6	99.9	124.3	3.4	-2.8	1.9	503.3	999.9	99.9	999.9	55.2	79.0
77.2	162.0	25038.1	25.0	-51.4	99.9	999.9	99.9	99.9	99.9	636.9	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 349
MONETTE, MO

6 MAY 1975
1115 GMT

159 14. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.1	438.0	954.6	17.8	16.5	160.0	3.1	-1.1	2.9	296.5	329.2	12.5	92.0	6.0	7.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.2	9.5	479.7	950.0	18.2	16.9	180.4	7.7	0.1	7.7	297.3	331.3	12.9	92.5	0.1	353.0
1.0	11.5	739.8	925.0	19.3	18.3	194.2	14.7	3.6	14.2	301.0	339.5	14.5	93.9	0.7	358.0
2.0	13.8	946.0	900.0	18.7	16.7	207.2	15.0	6.9	13.4	302.5	338.5	13.4	88.1	1.5	13.0
2.9	15.9	1188.4	875.0	18.0	16.3	220.3	13.2	8.5	10.0	304.3	340.8	13.5	89.8	2.3	19.0
3.8	18.3	1436.8	850.0	16.5	14.6	227.5	12.5	9.2	8.4	305.1	338.8	12.4	88.7	2.9	25.0
4.8	20.6	1691.4	825.0	15.1	13.2	230.9	10.2	7.9	6.5	306.1	338.0	11.6	88.1	3.5	39.0
5.9	22.9	1951.9	800.0	12.9	10.7	234.0	7.9	6.4	4.6	306.3	334.4	10.2	86.2	4.1	33.0
6.9	25.4	2219.1	775.0	11.8	8.1	229.1	8.2	6.2	5.4	307.7	332.4	8.8	77.7	4.6	35.0
8.1	27.9	2493.0	750.0	9.9	5.1	228.9	8.9	6.7	5.8	308.3	329.2	7.4	72.1	5.1	36.0
9.1	30.5	2774.5	725.0	8.1	2.1	232.2	9.1	7.2	5.6	309.1	326.8	6.2	66.0	5.7	38.0
10.2	33.2	3063.5	700.0	6.3	-1.0	230.5	9.7	7.5	6.2	310.2	325.0	5.1	59.5	6.3	39.0
11.4	35.8	3361.0	675.0	4.4	-3.4	226.2	9.7	7.0	6.7	311.1	324.2	4.4	56.9	7.0	40.0
12.6	38.4	3667.4	650.0	2.1	-5.4	218.7	11.4	7.1	8.9	311.8	323.5	3.9	57.8	7.7	40.0
13.7	41.2	3982.9	625.0	0.1	-9.3	215.6	12.0	7.0	9.8	312.9	322.1	3.0	49.4	8.5	40.0
15.0	44.1	4308.5	600.0	-2.6	-12.3	208.1	10.7	5.1	9.5	313.4	321.0	2.5	47.0	9.4	39.0
16.2	47.3	4644.5	575.0	-5.8	-13.5	207.2	10.5	4.8	9.3	313.5	320.7	2.3	54.0	10.2	38.0
17.5	50.3	4991.9	550.0	-7.4	-14.7	222.3	11.5	7.8	8.5	315.6	322.5	2.2	56.6	11.0	38.0
18.7	53.4	5353.2	525.0	-9.3	-25.3	235.6	11.8	9.8	6.7	317.3	320.4	0.9	26.1	11.9	39.0
20.1	56.4	5728.5	500.0	-11.9	-29.3	237.4	12.6	10.6	6.8	318.6	320.8	0.7	22.0	12.8	40.0
21.4	59.9	6118.7	475.0	-15.3	-32.2	233.3	11.4	9.1	6.8	319.1	320.9	0.5	21.9	13.8	41.0
23.0	63.4	6525.0	450.0	-18.1	-35.7	236.4	12.5	10.4	6.9	320.5	321.9	0.4	19.6	14.8	42.0
24.5	66.7	6945.8	425.0	-21.0	-38.0	243.0	14.0	12.5	6.4	322.1	323.3	0.3	19.8	16.0	43.0
26.1	70.4	7394.1	400.0	-24.5	-40.9	245.6	15.7	14.3	6.5	323.2	324.1	0.3	19.9	17.3	45.0
27.7	74.2	7861.4	375.0	-27.7	-43.7	249.3	15.5	14.5	5.5	324.9	325.7	0.2	19.9	18.7	47.0
29.4	78.3	8353.7	350.0	-31.3	-46.7	243.8	18.4	16.5	8.1	326.4	327.0	0.2	20.2	20.4	49.0
31.3	82.6	8873.8	325.0	-35.9	-49.6	250.2	17.5	16.5	5.9	327.1	327.6	0.1	22.6	22.4	50.0
33.5	87.0	9424.2	300.0	-40.5	-52.3	252.3	19.0	18.1	5.8	328.3	329.9	99.9	999.9	24.6	52.0
35.9	91.8	10011.2	275.0	-45.2	-55.9	259.2	19.2	18.9	3.6	329.7	329.9	99.9	999.9	27.1	55.0
38.4	96.8	10641.0	250.0	-50.2	-59.9	258.6	20.1	19.7	4.0	331.5	329.9	99.9	999.9	29.8	57.0
40.8	102.0	11320.7	225.0	-55.2	-64.5	258.6	21.1	20.7	4.2	333.9	329.9	99.9	999.9	32.6	59.0
43.6	108.0	12064.9	200.0	-59.9	-69.9	255.5	21.6	20.9	5.4	337.9	329.9	99.9	999.9	36.1	61.0
46.8	114.3	12890.7	175.0	-64.5	-74.5	255.0	20.4	19.7	5.3	343.5	329.9	99.9	999.9	39.9	62.0
50.2	121.0	13822.7	150.0	-67.3	-79.9	260.3	17.8	17.6	3.0	354.2	329.9	99.9	999.9	42.9	64.0
54.1	128.7	14930.3	125.0	-63.7	-79.9	266.7	23.9	23.9	1.4	379.7	329.9	99.9	999.9	48.6	65.0
58.9	137.0	16313.8	100.0	-59.7	-79.9	285.2	15.9	15.4	-4.2	412.4	329.9	99.9	999.9	53.4	69.0
64.9	145.0	18104.0	75.0	-61.7	-79.9	281.1	9.5	9.3	-1.8	443.5	329.9	99.9	999.9	56.5	72.0
73.2	154.0	20627.2	50.0	-59.9	-79.9	5.9	3.9	-0.4	-3.9	502.4	329.9	99.9	999.9	57.6	74.0
86.0	163.0	25025.5	25.0	-51.7	-79.9	286.9	3.4	3.3	-1.0	636.0	329.9	99.9	999.9	57.1	76.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 353
OKLAHOMA CITY, OKLA

6 MAY 1975

1115 GMT

150 21. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U CUMP M/SEC	V CUMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.2	392.0	957.0	21.1	19.4	180.0	5.2	0.0	5.2	309.0	339.6	15.0	99.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.1	9.8	456.0	950.0	21.4	20.2	320.8	3.0	1.9	-2.3	301.1	343.1	15.9	92.6	0.6	6.
0.8	11.6	687.9	925.0	20.3	19.3	255.5	3.8	3.8	0.7	302.2	343.4	15.5	94.1	0.8	14.
1.6	13.7	924.9	900.0	18.8	17.2	208.6	12.9	6.2	11.3	302.7	340.0	13.9	90.8	1.2	20.
2.5	15.9	1166.9	875.0	16.8	15.6	207.1	13.3	6.1	11.9	303.0	337.5	12.8	92.3	2.0	23.
3.4	18.1	1414.1	850.0	16.4	8.6	213.6	15.1	8.4	12.6	304.4	327.4	8.3	60.1	2.7	25.
4.2	20.3	1669.3	825.0	17.5	3.9	214.4	14.8	8.4	12.2	308.6	325.7	6.2	40.6	3.5	27.
5.0	22.5	1932.0	800.0	16.9	0.0	213.9	14.5	8.1	12.0	309.8	323.9	4.8	31.8	4.1	28.
5.9	24.9	2201.3	775.0	14.4	0.5	216.1	13.4	7.9	11.9	309.9	324.9	5.1	38.8	4.9	29.
6.9	27.2	2476.8	750.0	11.3	-0.2	221.4	13.1	8.6	9.8	309.5	324.2	5.1	45.1	5.6	31.
7.9	29.7	2758.7	725.0	8.6	-3.0	221.7	13.8	9.2	10.3	309.4	321.8	4.2	43.8	6.4	32.
8.9	32.3	3047.9	700.0	6.5	-7.9	221.2	12.9	8.5	9.7	310.0	319.2	3.0	35.3	7.2	33.
9.8	34.7	3344.9	675.0	4.0	-10.5	222.3	10.6	7.1	7.8	310.4	318.2	2.6	33.9	7.9	34.
10.8	37.1	3650.4	650.0	1.8	-11.6	226.3	10.7	7.8	7.4	311.2	316.7	2.4	35.3	8.5	34.
12.0	39.9	3964.7	625.0	-1.8	-13.6	229.6	13.5	10.3	8.8	310.7	317.2	2.1	40.0	9.2	35.
13.0	42.4	4288.2	600.0	-4.4	-14.7	233.7	16.3	13.2	9.7	311.3	317.6	2.0	44.0	10.1	37.
14.0	45.4	4621.6	575.0	-7.3	-17.8	235.7	18.6	15.4	10.5	311.6	316.7	1.6	43.0	11.2	39.
15.1	48.4	4967.6	550.0	-7.1	-25.3	231.0	17.8	13.8	11.2	315.8	318.7	0.9	21.6	12.5	41.
16.3	51.1	5329.8	525.0	-8.3	-26.3	224.7	17.0	12.0	12.1	318.5	321.4	0.8	21.7	13.6	41.
17.5	54.4	5706.3	500.0	-11.4	-28.9	222.5	16.1	10.9	11.9	319.2	321.6	0.7	21.8	14.9	41.
18.8	57.4	6097.5	475.0	-14.5	-31.5	213.8	16.3	9.1	13.6	320.1	322.0	0.6	22.0	16.0	41.
20.0	60.9	6504.0	450.0	-18.5	-33.6	213.5	18.8	10.4	15.7	320.0	321.7	0.5	24.8	17.3	40.
21.4	64.3	6927.2	425.0	-22.4	-37.0	215.3	20.6	11.9	16.8	320.2	321.5	0.4	25.0	19.0	40.
23.1	67.7	7369.3	400.0	-25.7	-39.7	222.1	24.3	16.3	18.0	321.5	322.6	0.3	25.5	21.2	43.
25.0	71.3	7834.4	375.0	-28.7	-42.3	227.2	26.0	19.1	17.6	323.5	324.4	0.2	25.6	24.2	40.
26.8	75.3	8325.0	350.0	-32.1	-45.1	228.2	25.6	19.1	17.1	325.4	326.2	0.2	25.7	26.9	41.
28.6	79.5	8844.2	325.0	-36.0	-48.6	222.7	21.2	14.4	15.6	326.9	327.5	0.1	25.9	29.3	42.
30.5	83.6	9394.4	300.0	-40.9	-50.9	221.4	21.5	14.2	16.1	327.7	999.9	99.9	999.9	31.9	42.
32.8	88.0	9979.8	275.0	-45.9	-55.9	225.8	23.7	17.0	16.5	328.8	999.9	99.9	999.9	34.7	42.
35.3	92.8	10607.8	250.0	-51.0	-59.9	226.2	29.1	21.0	20.2	330.3	999.9	99.9	999.9	38.3	42.
38.1	98.0	11296.0	225.0	-55.3	-59.9	233.3	26.0	20.9	15.6	333.7	999.9	99.9	999.9	42.8	43.
40.5	103.3	12031.4	200.0	-59.5	-59.9	241.5	26.4	23.2	12.6	338.5	999.9	99.9	999.9	47.1	44.
44.0	109.5	12859.8	175.0	-62.6	-59.9	237.5	30.8	26.0	16.5	346.7	999.9	99.9	999.9	52.9	46.
47.5	115.8	13815.7	150.0	-61.0	-59.9	245.9	26.9	24.5	11.0	365.0	999.9	99.9	999.9	58.1	47.
51.8	123.0	14945.2	125.0	-61.7	-59.9	264.7	22.9	22.8	2.1	383.2	999.9	99.9	999.9	65.1	50.
57.1	131.0	16337.7	100.0	-57.2	-59.9	289.5	7.1	6.7	-2.4	417.3	999.9	99.9	999.9	69.9	53.
63.7	139.3	18120.8	75.0	-62.5	-59.9	284.0	7.9	7.6	-1.9	441.5	999.9	99.9	999.9	72.9	55.
71.8	147.7	20638.0	50.0	-58.7	-59.9	269.1	1.4	1.4	0.0	505.3	999.9	99.9	999.9	72.2	56.
84.6	156.5	25061.6	25.0	-50.6	-59.9	45.4	8.5	-6.0	-5.9	639.4	999.9	99.9	999.9	69.7	57.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 363
AMARILLO, TEX

6 MAY 1975

1115 GMT

144 16. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DFW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.7	14.2	1095.0	881.2	3.7	-6.3	260.0	3.6	3.5	0.6	287.4	294.9	2.7	48.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	14.7	1153.2	875.0	8.0	-7.5	999.9	99.9	99.9	99.9	292.5	299.5	2.5	34.1	99.9	99.9
1.0	16.6	1394.4	850.0	10.7	-8.5	999.9	99.9	99.9	99.9	297.6	304.5	2.4	25.1	99.9	99.9
1.9	18.9	1641.9	825.0	8.5	-10.3	999.9	99.9	99.9	99.9	297.9	304.1	2.1	25.1	99.9	99.9
2.6	21.0	1895.3	800.0	6.6	-11.9	288.0	18.3	17.4	-5.6	298.5	304.1	1.9	25.2	1.9	108.
3.5	23.3	2155.0	775.0	4.7	-13.4	279.3	23.7	23.3	-3.8	299.1	304.3	1.8	25.5	3.0	107.
4.3	25.6	2421.8	750.0	4.2	-11.0	267.5	25.7	25.6	1.1	301.4	307.9	2.2	32.1	4.2	103.
5.2	27.9	2697.3	725.0	3.6	-10.0	252.9	26.6	25.4	7.8	303.7	311.0	2.5	36.2	5.5	98.
6.2	30.4	2981.3	700.0	1.7	-12.1	243.1	28.6	25.5	12.9	304.7	311.2	2.2	35.0	6.9	91.
7.3	33.0	3273.7	675.0	0.7	-13.9	237.9	29.7	25.2	15.8	306.6	312.5	1.9	32.6	8.7	84.
8.4	35.5	3575.6	650.0	-1.6	-16.4	230.2	31.6	24.3	20.3	307.3	312.4	1.6	31.4	10.5	79.
9.4	38.1	3886.6	625.0	-3.0	-20.6	223.5	31.4	21.6	22.8	309.2	312.9	1.2	24.2	12.2	74.
10.5	40.7	4209.9	600.0	-3.5	-18.9	216.1	33.0	19.4	26.7	312.3	316.8	1.4	29.0	13.9	69.
11.6	43.6	4544.9	575.0	-5.9	-20.7	211.7	35.4	18.6	30.1	313.2	317.2	1.3	30.0	15.8	64.
12.7	46.4	4891.0	550.0	-9.2	-22.1	211.9	34.9	18.4	29.6	313.3	317.1	1.2	34.1	17.8	60.
13.8	49.5	5248.8	525.0	-12.2	-27.5	217.6	37.0	22.6	29.4	313.8	316.3	0.8	26.6	20.2	57.
15.0	52.4	5619.7	500.0	-15.0	-30.9	219.3	32.7	20.6	25.4	314.8	316.7	0.6	24.1	22.6	55.
16.2	55.4	6007.2	475.0	-16.0	-33.0	221.4	33.2	21.9	24.9	318.2	319.9	0.5	21.5	24.7	54.
17.6	58.7	6413.3	450.0	-17.9	-34.5	224.0	32.0	22.3	23.0	320.8	322.4	0.4	21.6	27.4	53.
19.0	62.1	6838.6	425.0	-20.4	-36.2	223.5	29.8	20.5	21.6	322.8	324.2	0.4	22.6	30.0	52.
20.5	65.6	7284.4	400.0	-24.1	-39.3	225.0	32.0	22.6	22.6	323.7	324.8	0.3	22.8	32.7	51.
22.1	69.2	7751.4	375.0	-28.0	-42.6	227.5	33.9	25.0	22.9	324.4	325.3	0.2	23.0	35.7	51.
23.7	72.9	8242.6	350.0	-31.9	-45.9	229.6	29.9	22.8	19.4	325.7	326.3	0.2	23.2	39.1	51.
25.3	77.0	8760.9	325.0	-36.8	-50.1	228.0	27.5	20.4	18.4	325.9	326.3	0.1	23.4	41.8	50.
27.1	81.0	9310.3	300.0	-41.1	99.9	227.7	26.6	19.6	17.9	327.5	999.9	99.9	99.9	44.7	50.
29.0	85.5	9894.8	275.0	-46.5	99.9	228.2	27.4	20.5	18.3	327.9	999.9	99.9	99.9	47.8	50.
31.1	90.2	10519.8	250.0	-51.4	99.9	225.9	32.6	23.4	22.7	329.7	999.9	99.9	99.9	51.2	50.
33.3	95.3	11198.6	225.0	-55.4	99.9	223.4	30.7*	21.1	22.3	333.6	999.9	99.9	99.9	55.8	49.
35.8	100.6	11943.0	200.0	-58.5	99.9	230.9	37.0*	28.7	23.3	340.1	999.9	99.9	99.9	60.9	49.
38.7	106.9	12777.4	175.0	-59.9	99.9	237.5	28.3*	23.9	15.2	351.1	999.9	99.9	99.9	66.2	50.
41.6	113.3	13745.5	150.0	-58.0	99.9	236.2	33.3*	27.6	18.6	370.2	999.9	99.9	99.9	71.5	50.
45.1	120.3	14886.9	125.0	-59.4	99.9	258.4	23.8*	23.3	4.8	387.4	999.9	99.9	99.9	77.6	51.
49.3	128.3	16288.1	100.0	-57.6	99.9	251.4	22.5	21.4	7.2	416.4	999.9	99.9	99.9	81.9	53.
54.7	137.0	18082.7	75.0	-62.7	99.9	266.3	3.5	3.5	0.2	441.5	999.9	99.9	99.9	85.2	54.
62.3	145.3	20593.7	50.0	-59.3	99.9	226.5	5.0	3.6	3.5	503.8	999.9	99.9	99.9	83.7	54.
74.0	154.0	25016.3	25.0	-50.4	99.9	349.8	4.1	0.7	-4.0	639.7	999.9	99.9	99.9	83.4	55.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 365
ALBUQUERQUE, N. MEX

6 MAY 1975
1115 GMT

148 11. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	SEA ST DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SLC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	22.2	1619.0	831.4	-0.6	-6.8	240.0	3.6	3.1	1.8	287.7	295.3	2.8	63.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.2	22.8	1681.1	825.0	1.1	-7.0	254.0	7.7	7.4	2.1	290.1	297.7	2.7	54.8	0.2	48.
1.1	25.3	1928.6	800.0	0.0	-8.5	261.0	8.7	8.5	1.4	291.5	298.6	2.5	52.6	0.5	71.
2.0	27.9	2181.7	775.0	-2.3	-10.9	277.4	9.4	9.3	-1.2	291.6	297.7	2.1	51.5	1.0	80.
2.8	30.6	2441.1	750.0	-4.5	-13.6	291.7	7.7	7.2	-2.9	291.9	297.1	1.8	49.0	1.4	87.
3.8	33.3	2707.1	725.0	-6.6	-16.1	294.3	10.0	9.2	-4.1	292.4	296.8	1.5	46.9	1.9	95.
4.8	35.9	2980.2	700.0	-8.5	-19.0	291.8	12.7	11.8	-4.7	293.2	296.8	1.2	42.4	2.5	99.
5.6	38.8	3261.8	675.0	-9.8	-24.2	291.7	16.4	15.2	-6.1	294.7	297.1	0.8	29.7	3.2	102.
6.5	41.5	3551.7	650.0	-12.3	-26.4	293.4	15.7	14.4	-6.2	295.1	297.2	0.7	29.7	4.1	104.
7.5	44.4	3850.2	625.0	-14.7	-28.4	291.3	15.8	14.7	-5.7	295.7	297.5	0.6	29.7	5.0	106.
8.5	47.5	4158.0	600.0	-16.6	-31.3	284.0	17.9	17.4	-4.3	296.9	298.4	0.5	26.6	6.0	106.
9.4	50.5	4478.0	575.0	-16.2	-33.5	272.2	21.6	21.6	-0.8	301.1	302.3	0.4	20.7	7.1	105.
10.4	53.6	4811.6	550.0	-17.9	-35.4	261.5	24.7	24.4	3.7	302.8	303.9	0.3	19.9	8.4	102.
11.4	56.6	5158.1	525.0	-19.6	-36.7	252.4	29.2	27.8	8.8	304.9	305.9	0.3	20.0	9.9	98.
12.8	60.0	5518.8	500.0	-20.8	-37.7	246.3	37.1	33.9	14.9	307.6	308.6	0.3	20.1	12.3	92.
14.6	63.6	5899.9	475.0	-20.0	-37.1	243.0	43.3	38.6	19.6	313.2	314.4	0.3	20.0	16.5	85.
16.3	67.0	6299.7	450.0	-21.2	-38.1	240.2	44.2	38.4	22.0	316.5	317.6	0.3	20.1	20.5	80.
17.9	70.5	6720.7	425.0	-22.5	-39.1	243.7	48.0	43.1	21.3	320.1	321.2	0.3	20.2	24.9	77.
19.6	74.3	7164.4	400.0	-24.5	-40.7	241.1	46.4*	40.7	22.4	323.2	324.1	0.3	20.4	29.7	74.
21.2	78.2	7630.5	375.0	-28.6	-44.1	239.8	48.5*	41.9	24.4	323.7	324.4	0.2	20.7	33.9	73.
23.0	82.2	9120.4	350.0	-32.7	-47.5	239.3	48.1*	41.3	24.5	324.6	325.1	0.1	21.1	39.0	71.
25.2	86.2	8638.6	325.0	-36.1	-50.3	241.9	48.1*	42.4	22.7	326.9	327.3	0.1	21.3	45.0	69.
26.9	90.9	9189.9	300.0	-40.1	99.9	242.5	49.7*	44.1	23.0	328.9	999.9	99.9	999.9	50.3	69.
29.3	95.5	9778.2	275.0	-44.6	99.9	240.9	54.0*	47.2	26.3	330.6	999.9	99.9	999.9	56.8	68.
31.5	100.3	10410.6	250.0	-49.1	99.9	240.3	43.8*	38.0	21.7	333.1	999.9	99.9	999.9	63.5	67.
33.6	105.4	11094.7	225.0	-53.8	99.9	227.0	27.0*	19.8	18.4	336.0	999.9	99.9	999.9	68.3	66.
36.9	111.0	11854.9	200.0	-51.4	99.9	241.7	27.5*	24.2	13.0	351.5	999.9	99.9	999.9	73.4	65.
40.2	117.0	12711.0	175.0	-56.4	99.9	224.8	30.6*	21.6	21.7	350.8	999.9	99.9	999.9	79.3	64.
43.7	123.7	13690.8	150.0	-57.7	99.9	236.0	28.7*	23.8	16.0	370.7	999.9	99.9	999.9	84.9	64.
48.0	130.8	14835.9	125.0	-58.2	99.9	254.8	30.4*	29.4	8.0	389.6	999.9	99.9	999.9	92.6	63.
53.5	138.3	16246.4	100.0	-55.5	99.9	246.5	16.4*	15.0	6.5	420.6	999.9	99.9	999.9	101.1	64.
59.2	146.0	18060.7	75.0	-61.0	99.9	189.9	3.8*	0.6	3.7	445.0	999.9	99.9	999.9	102.9	63.
68.0	154.7	20590.0	50.0	-58.1	99.9	200.6	3.1*	1.1	2.9	506.7	999.9	99.9	999.9	104.2	63.
80.7	163.7	25000.9	25.0	-53.8	99.9	272.4	2.4	2.4	-0.1	630.5	999.9	99.9	999.9	104.7	65.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 433
SALEM, ILL.

6 MAY 1975
1115 GMT

164 25. 0

TIME	CNTCT	HEIGHT	PRES	TEMP	DEW PT	DIR	SPEED	U COMP	V CCMP	POT T	E POT T	MX RTO	RH	RANGE	AZ
MIN		GFM	MB	DEG C	DEG C	DEG	M/SEC	M/SEC	M/SEC	DEG K	DEG K	GM/KG	PCT	KM	DEG
0.7	5.6	175.0	987.9	15.0	13.2	170.0	2.6	-0.5	2.6	290.4	315.6	9.7	89.0	0.3	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.4	6.6	287.6	975.0	18.2	14.9	250.9	18.5	17.5	6.1	294.9	323.9	11.1	81.3	0.2	352.
1.1	8.6	511.8	950.0	20.1	17.6	247.0	14.0	12.9	5.5	299.4	335.2	13.5	85.7	0.7	52.
1.9	11.0	741.9	925.0	18.4	15.0	251.2	8.8	8.3	2.8	295.7	331.9	11.7	80.4	1.2	58.
2.7	13.4	977.0	900.0	17.3	11.9	256.6	7.0	6.8	1.6	300.7	327.2	9.8	70.6	1.5	62.
3.5	15.6	1217.8	875.0	16.5	8.4	256.1	3.8	3.7	0.9	302.0	323.8	7.9	58.6	1.8	64.
4.3	17.9	1463.8	850.0	14.1	6.9	266.7	2.4	2.4	0.0	301.9	322.2	7.4	61.5	1.9	65.
5.1	20.3	1715.3	825.0	11.9	6.3	257.9	1.5	1.5	0.3	302.2	322.3	7.3	68.1	2.0	67.
6.0	22.7	1972.3	800.0	9.7	5.8	237.6	3.0	2.5	1.6	302.4	322.5	7.3	76.6	2.1	66.
6.9	25.2	2235.3	775.0	7.3	5.1	251.9	3.9	3.7	1.2	302.6	322.5	7.2	86.0	2.3	66.
7.7	27.6	2504.8	750.0	5.2	4.1	271.9	5.4	5.4	-0.2	303.1	322.2	6.9	92.5	2.5	67.
8.6	30.2	2781.3	725.0	3.2	2.5	276.9	7.1	7.1	-0.9	303.8	321.5	6.3	94.9	2.8	71.
9.6	32.9	3065.1	700.0	0.6	-0.5	270.3	8.6	8.6	-0.1	303.8	318.8	5.3	92.7	3.2	74.
10.5	35.5	3357.0	675.0	-1.0	-2.7	268.1	9.3	9.3	0.3	305.2	319.5	4.6	87.7	3.7	76.
11.5	38.3	3657.3	650.0	-2.7	-13.8	277.9	10.3	10.2	-1.4	306.1	312.4	2.1	42.9	4.3	77.
12.6	41.0	3968.1	625.0	-3.2	-23.5	290.2	12.6	11.8	-4.4	308.9	311.8	0.9	19.0	5.0	82.
13.7	43.4	4289.8	600.0	-5.6	-23.3	294.7	13.7	12.5	-5.7	309.7	312.8	1.0	23.2	5.8	86.
14.8	46.9	4621.9	575.0	-8.1	-28.8	295.2	13.2	11.9	-5.6	310.6	312.6	0.6	17.0	6.6	90.
16.0	50.0	4955.6	550.0	-10.0	-29.7	290.1	11.8	11.1	-4.1	312.2	314.3	0.6	19.4	7.4	93.
17.1	53.0	5322.8	525.0	-12.6	-30.6	292.5	11.4	10.5	-4.3	313.3	315.2	0.6	20.5	8.1	94.
18.2	56.0	5693.9	500.0	-14.1	-32.8	299.4	13.9	12.1	-6.8	315.8	317.5	0.5	18.7	8.9	96.
19.5	59.3	6081.8	475.0	-16.5	-36.4	301.5	15.7	13.4	-8.2	317.5	318.7	0.4	16.0	9.9	99.
20.9	62.8	6486.0	450.0	-19.3	-33.9	305.8	15.2	12.3	-8.9	319.0	320.6	0.5	26.0	11.2	102.
22.3	66.1	6909.1	425.0	-22.0	-38.6	300.8	16.6	14.2	-8.5	320.7	321.8	0.3	20.5	12.4	104.
23.8	69.9	7351.8	400.0	-25.6	-41.5	296.1	17.8	16.0	-7.8	321.6	322.5	0.2	20.9	14.0	106.
25.4	73.5	7816.2	375.0	-29.4	-44.6	295.1	17.7	16.0	-7.5	322.6	323.3	0.2	21.1	15.6	107.
27.2	77.3	8305.3	350.0	-32.8	-46.4	293.9	18.0	16.5	-7.3	324.4	325.0	0.2	24.2	17.5	108.
29.0	81.5	8822.2	325.0	-37.1	-50.0	286.1	21.3	20.4	-5.9	325.4	325.9	0.1	24.4	19.6	108.
31.0	85.7	9370.0	300.0	-41.9	-50.0	284.5	20.5	19.9	-5.1	326.4	999.9	99.9	999.9	22.1	107.
33.1	90.4	9952.5	275.0	-46.9	-50.0	287.1	21.2	20.3	-6.2	327.3	999.9	99.9	999.9	24.7	107.
35.2	95.3	10577.4	250.0	-51.9	-50.0	282.8	25.3	24.7	-5.6	328.9	999.9	99.9	999.9	27.6	107.
37.5	100.3	11252.3	225.0	-57.0	-50.0	285.2	26.5	25.6	-6.9	331.2	999.9	99.9	999.9	31.1	107.
40.2	106.0	11992.3	200.0	-59.8	-50.0	290.1	29.1	27.3	-10.0	338.1	999.9	99.9	999.9	35.8	107.
43.1	112.0	12819.3	175.0	-63.7	-50.0	283.6	28.3	27.5	-6.7	344.9	999.9	99.9	999.9	40.6	107.
46.4	118.7	13755.9	150.0	-66.0	-50.0	284.8	35.4	34.3	-9.1	356.4	999.9	99.9	999.9	46.9	106.
50.2	126.3	14878.9	125.0	-62.4	-50.0	291.7	18.8	17.5	-7.0	382.0	999.9	99.9	999.9	52.8	107.
55.0	135.3	16270.2	100.0	-59.5	-50.0	300.8	15.1	13.0	-7.7	412.8	999.9	99.9	999.9	58.1	107.
61.1	144.5	18077.0	75.0	-59.9	-50.0	303.1	13.4	11.3	-7.3	447.4	999.9	99.9	999.9	63.2	107.
69.0	155.5	20623.7	50.0	-57.1	-50.0	357.5	4.0	0.2	-4.0	509.0	999.9	99.9	999.9	65.0	109.
80.6	168.0	25052.7	25.0	-50.4	-50.0	999.9	999.9	99.9	99.9	639.7	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 451
DULGE CITY, KAN

6 MAY 1975
1115 GMT

144 45. 0

TIME MIN	CNTCT	HEIGHT FT	PRES MB	TEMP DEG C	DEW PT DEG C	DIR DEG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DEG K	E POT T DEG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DEG
0.3	14.3	791.0	911.6	10.6	3.9	260.0	5.2	5.1	0.9	292.1	307.0	5.6	63.0	0.3	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.3	15.4	898.8	900.0	13.9	-0.1	288.4	11.5	10.9	-3.6	296.4	309.0	4.6	42.3	0.4	102.
1.0	17.7	1136.4	875.0	14.2	-8.3	284.7	11.8	11.4	-3.0	298.9	305.7	2.3	20.1	0.8	105.
1.8	20.1	1380.3	850.0	13.3	-9.0	269.6	11.9	11.9	0.1	300.4	307.1	2.3	20.2	1.4	102.
2.6	22.5	1631.9	825.0	12.4	-7.4	244.1	7.2	6.5	3.2	302.0	309.8	2.7	24.4	1.8	97.
3.4	25.0	1887.9	800.0	10.9	-5.6	213.6	9.4	5.2	7.9	303.1	312.3	3.2	31.0	2.0	89.
4.3	27.3	2152.6	775.0	10.4	-6.8	223.1	15.6	10.7	11.4	305.3	314.1	3.0	29.2	2.5	77.
5.0	30.0	2424.4	750.0	8.5	-8.6	227.0	18.3	13.4	12.5	306.1	314.0	2.7	28.7	3.2	74.
5.9	32.7	2703.1	725.0	5.6	-10.5	226.6	19.8	14.4	13.6	305.9	313.0	2.4	30.2	4.1	64.
6.7	35.4	2988.8	700.0	3.2	-9.9	217.6	21.6	13.1	17.1	306.3	314.1	2.6	37.7	5.2	60.
7.6	38.1	3282.9	675.0	2.0	-9.8	207.1	23.5	10.7	21.0	308.2	316.3	2.7	41.2	6.2	55.
8.6	40.9	3586.3	650.0	-0.5	-12.1	208.0	26.9	12.6	23.7	308.7	315.8	2.3	40.9	7.5	49.
9.5	43.8	3898.4	625.0	-3.2	-14.5	210.6	28.7	14.6	24.7	309.0	315.1	2.0	41.2	9.0	46.
10.6	46.8	4219.8	600.0	-5.8	-18.0	211.1	32.6	16.8	27.9	309.5	314.4	1.6	37.5	10.9	43.
11.6	49.9	4552.4	575.0	-7.1	-24.6	210.6	36.7	18.7	31.5	311.8	314.7	0.9	23.2	13.0	41.
12.8	52.9	4898.2	550.0	-8.8	-23.7	209.9	38.9	19.4	33.8	313.7	317.1	1.0	28.7	15.5	39.
13.9	55.9	5256.2	525.0	-12.4	-22.9	208.5	40.2	19.2	35.3	313.7	317.4	1.1	40.8	18.3	38.
15.1	59.3	5626.9	500.0	-15.2	-30.7	210.0	39.3	19.6	34.0	314.6	316.5	0.6	25.1	21.1	37.
16.3	62.6	6013.2	475.0	-16.7	-33.9	213.9	36.4	20.3	30.2	317.3	318.8	0.5	20.8	23.6	36.
17.8	66.0	6419.5	450.0	-16.5	-35.5	219.0	39.0	24.5	30.3	322.4	323.9	0.4	17.4	27.4	36.
19.2	69.7	6846.5	425.0	-19.9	-38.2	221.7	37.1	24.6	27.7	323.4	324.6	0.3	17.7	30.3	37.
20.7	73.3	7293.3	400.0	-23.1	-40.1	225.8	36.8	26.4	25.7	324.9	325.9	0.3	19.3	33.4	37.
22.2	77.1	7762.3	375.0	-26.5	-42.8	223.7	38.9	26.9	28.1	326.4	327.3	0.2	19.6	37.5	38.
24.0	81.2	8256.9	350.0	-30.8	-46.3	222.5	33.7*	22.8	24.8	327.1	327.8	0.2	20.0	40.7	38.
25.6	85.3	8778.9	325.0	-34.7	-49.5	222.3	39.1*	26.3	28.9	328.8	329.3	0.1	20.3	44.6	39.
27.6	89.7	9333.1	300.0	-39.0	-53.1	217.6	31.9*	19.5	25.3	330.3	331.6	0.1	20.7	48.7	39.
29.6	94.4	9923.8	275.0	-44.0	99.9	209.7	35.6*	17.6	30.9	331.5	999.9	99.9	999.9	52.2	39.
31.8	99.2	10556.1	250.0	-49.3	99.9	205.9	31.5*	13.8	28.4	332.8	999.9	99.9	999.9	56.5	38.
34.1	104.4	11238.6	225.0	-55.0	99.9	204.9	28.5*	12.0	25.8	334.3	999.9	99.9	999.9	60.8	37.
36.6	110.2	11981.7	200.0	-60.6	99.9	212.3	24.9*	13.3	21.1	336.9	999.9	99.9	999.9	65.2	36.
39.4	116.0	12806.6	175.0	-62.8	99.9	224.1	22.4*	15.6	16.1	346.3	999.9	99.9	999.9	68.8	36.
43.1	123.0	13763.9	150.0	-59.2	99.9	249.5	21.9*	20.5	7.7	368.1	999.9	99.9	999.9	74.5	38.
47.0	130.3	14909.4	125.0	-59.4	99.9	223.5	22.2*	15.3	16.1	387.4	999.9	99.9	999.9	78.9	39.
51.7	138.0	16320.3	100.0	-54.4	99.9	229.1	19.0*	14.4	12.4	422.7	999.9	99.9	999.9	83.4	40.
57.4	146.0	18125.3	75.0	-59.2	99.9	4.8	7.0	-0.6	-6.9	448.8	999.9	99.9	999.9	86.0	41.
65.7	155.3	20656.2	50.0	-59.9	99.9	999.9	99.9	99.9	99.9	502.3	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 456
TOPEKA, KAN

6 MAY 1975
1115 GMT

162 13. 0

TIME MIN	CATCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.9	268.0	971.0	19.4	17.7	120.0	3.7	-3.2	1.8	296.8	331.6	13.3	90.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.5	8.8	457.1	950.0	19.3	17.8	181.4	14.7	0.4	14.6	298.6	334.7	13.7	90.9	0.3	349.
1.4	10.7	687.3	925.0	18.9	17.7	195.9	15.5	4.2	14.9	300.5	337.5	14.0	93.1	1.7	2.
2.2	12.9	922.9	900.0	17.1	16.1	204.6	16.3	6.8	14.9	300.8	335.3	12.9	94.0	1.7	11.
2.9	15.1	1163.6	875.0	15.7	14.5	201.1	15.4	5.5	14.3	301.7	333.8	11.9	92.0	2.5	15.
3.8	17.2	1410.7	850.0	15.5	14.0	199.3	14.2	4.7	13.4	304.0	336.4	11.9	90.5	3.2	16.
4.7	19.5	1664.2	825.0	14.7	11.6	203.5	11.1	4.4	10.2	305.5	334.3	10.5	82.1	3.9	17.
5.5	21.6	1925.7	800.0	16.5	-4.2	212.8	8.5	4.6	7.1	309.2	319.9	3.6	24.7	4.3	18.
6.5	24.1	2194.6	775.0	14.4	-8.6	231.5	8.5	6.7	5.3	309.6	317.4	2.6	19.5	4.7	21.
7.3	26.3	2470.1	750.0	12.2	-10.0	234.6	10.1	8.2	5.9	310.1	317.4	2.4	20.2	5.2	24.
8.3	28.8	2752.6	725.0	9.4	-10.7	236.9	9.9	8.3	5.4	310.1	317.2	2.3	22.9	5.7	27.
9.3	31.4	3042.0	700.0	6.6	-11.4	235.1	9.5	7.8	5.5	310.1	317.1	2.3	26.1	6.2	30.
10.2	34.0	3338.6	675.0	3.7	-12.1	233.0	8.8	7.0	5.3	310.1	316.9	2.2	30.2	6.7	31.
11.3	36.5	3643.5	650.0	0.8	-12.8	232.4	6.4	5.1	3.9	310.1	316.9	2.2	35.3	7.1	33.
12.3	39.2	3957.0	625.0	-1.9	-14.6	223.2	6.1	4.2	4.4	310.5	316.6	2.0	37.3	7.4	34.
13.4	41.9	4279.6	600.0	-5.4	-15.5	213.4	7.7	4.2	6.4	310.1	316.0	1.9	44.8	7.9	34.
14.5	44.7	4611.9	575.0	-8.3	-17.3	211.1	9.6	5.0	8.2	310.5	315.8	1.7	48.1	8.4	34.
15.6	47.7	4955.4	550.0	-10.7	-28.6	208.0	11.3	5.3	10.0	311.4	313.6	0.6	21.2	9.1	34.
16.8	50.6	5312.6	525.0	-11.8	-36.4	199.0	13.1	4.3	12.3	314.3	315.4	0.3	10.8	10.0	32.
18.2	53.6	5694.8	500.0	-13.8	-38.6	207.8	17.1	8.0	15.1	316.3	317.2	0.3	10.2	11.3	31.
19.5	56.6	6072.8	475.0	-16.2	-40.8	211.2	18.4	9.5	15.7	317.9	318.7	0.2	9.9	12.7	31.
20.9	60.0	6477.1	450.0	-19.4	-43.0	219.7	20.2	12.9	15.6	318.8	319.4	0.2	10.3	14.3	31.
22.1	63.3	6900.1	425.0	-21.7	-45.1	225.8	18.3	13.1	12.8	321.1	321.7	0.2	9.9	15.8	33.
23.7	66.7	7343.7	400.0	-25.1	-47.5	225.9	20.1	14.4	14.0	322.3	322.8	0.1	10.3	17.4	34.
25.2	70.4	7809.0	375.0	-29.0	-50.3	225.0	22.5	15.9	15.9	323.2	323.5	0.1	10.6	19.3	35.
26.9	74.2	8298.5	350.0	-33.0	-53.0	230.8	21.8	16.9	13.6	324.2	324.5	0.1	11.4	21.6	36.
28.6	78.2	8815.4	325.0	-37.3	-53.7	242.0	22.0	19.4	10.3	325.2	325.5	0.1	16.1	23.6	38.
30.5	82.3	9364.2	300.0	-41.1	99.9	249.5	25.3	23.7	8.8	327.4	999.9	99.9	999.9	26.2	41.
32.3	86.5	9951.0	275.0	-45.3	99.9	256.3	26.3	25.6	6.2	329.6	999.9	99.9	999.9	28.4	44.
34.4	91.3	10579.5	250.0	-50.4	99.9	253.8	23.5	22.6	6.6	331.2	999.9	99.9	999.9	31.2	47.
36.6	96.2	11258.9	225.0	-55.1	99.9	254.1	25.1	24.2	6.9	334.1	999.9	99.9	999.9	33.9	49.
38.9	101.5	12002.5	200.0	-60.1	99.9	255.9	22.2	21.5	5.4	337.6	999.9	99.9	999.9	37.7	52.
41.7	107.6	12829.6	175.0	-62.9	99.9	247.6	22.8	21.1	8.7	346.1	999.9	99.9	999.9	41.2	53.
44.6	114.0	13771.4	150.0	-66.3	99.9	269.5	14.8	14.8	0.1	355.9	999.9	99.9	999.9	44.3	55.
48.2	121.5	14885.7	125.0	-62.9	99.9	250.8	21.6	20.4	7.1	381.1	999.9	99.9	999.9	47.2	57.
52.7	130.0	16291.4	100.0	-57.9	99.9	326.9	13.3	7.3	-11.1	415.9	999.9	99.9	999.9	50.9	60.
58.4	139.3	18102.6	75.0	-59.8	99.9	295.6	6.6	6.0	-2.9	447.5	999.9	99.9	999.9	52.4	64.
65.9	149.5	20644.3	50.0	-58.2	99.9	19.8	2.4	-0.8	-2.2	506.3	999.9	99.9	999.9	53.7	67.
76.9	161.0	25066.3	25.0	-52.4	99.9	262.7	3.5	3.4	0.4	633.9	999.9	99.9	999.9	52.8	69.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 476
GRAND JUNCTION, COLO

6 MAY 1975
1115 GMT

138 22. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.7	19.6	1474.0	844.0	1.1	-1.1	110.0	1.0	-0.9	0.3	288.4	299.7	4.2	85.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.6	21.2	1657.4	825.0	1.0	-1.7	999.9	99.9	99.9	99.9	290.2	301.3	4.1	82.4	999.9	999.
1.3	23.6	1904.6	800.0	-0.6	-4.3	999.9	99.9	99.9	99.9	291.0	300.6	3.5	76.2	999.9	999.
2.0	25.8	2157.5	775.0	-2.8	-6.3	999.9	99.9	99.9	99.9	291.2	299.8	3.1	76.6	999.9	999.
2.7	28.3	2416.6	750.0	-4.7	-9.1	268.2	11.6	11.6	0.4	291.7	298.9	2.6	71.3	0.9	87.
3.4	30.9	2682.5	725.0	-6.6	-11.0	279.6	10.3	10.1	-1.7	292.5	298.9	2.3	71.2	1.3	89.
4.0	33.4	2955.5	700.0	-9.2	-11.3	286.6	8.8	8.4	-2.5	292.5	299.0	2.3	84.7	1.7	92.
4.7	35.9	3235.7	675.0	-11.5	-13.8	281.6	8.9	8.7	-1.8	293.0	298.6	2.0	83.1	2.1	95.
5.5	38.5	3523.9	650.0	-13.9	-16.4	275.1	10.6	10.5	-0.9	293.5	298.2	1.6	80.6	2.5	95.
6.2	41.1	3821.2	625.0	-14.9	-23.8	274.4	10.4	10.4	-0.8	295.4	298.1	0.9	46.5	3.0	95.
7.1	43.9	4129.0	600.0	-17.1	-25.5	278.0	8.5	8.5	-1.2	296.4	298.8	0.8	47.8	3.5	95.
7.9	46.8	4446.4	575.0	-20.1	-26.1	283.9	7.0	6.8	-1.7	296.5	298.9	0.8	58.7	3.9	95.
8.8	46.8	4774.2	550.0	-23.2	-25.5	296.8	5.5	4.9	-2.5	296.7	299.3	0.9	80.8	4.2	96.
9.7	52.6	5113.5	525.0	-25.7	-26.6	306.2	4.4	3.6	-2.6	297.6	300.2	0.8	92.0	4.5	98.
10.7	55.6	5465.3	500.0	-28.5	-28.6	295.1	4.6	4.1	-1.9	298.4	300.6	0.7	98.7	4.7	100.
11.7	58.6	5830.9	475.0	-31.4	-32.6	272.7	4.7	4.7	-0.2	299.1	300.8	0.5	88.8	5.0	100.
12.7	62.0	6210.7	450.0	-35.0	-36.6	258.0	5.5	5.4	1.1	299.2	300.4	0.4	85.1	5.2	99.
13.8	65.3	6606.8	425.0	-38.5	-39.7	263.1	5.8	5.7	0.7	299.6	300.6	0.3	88.6	5.6	98.
15.0	68.9	7019.5	400.0	-42.7	99.9	278.9	2.9	2.9	-0.5	299.5	999.9	99.9	999.9	6.0	97.
16.4	72.3	7452.3	375.0	-45.7	99.9	58.1	2.8	-2.3	-1.5	301.2	999.9	99.9	999.9	6.0	98.
17.8	76.2	7911.3	350.0	-44.5	99.9	238.2	4.9	4.2	2.6	308.8	999.9	99.9	999.9	5.9	95.
19.6	80.1	8410.8	325.0	-42.8	99.9	236.9	13.5	11.3	7.4	317.2	999.9	99.9	999.9	6.8	92.
21.6	84.2	8953.5	300.0	-41.7	99.9	237.6	21.1	17.8	11.3	326.6	999.9	99.9	999.9	8.5	84.
23.8	88.5	9546.2	275.0	-40.3	99.9	244.5	24.5	22.1	10.6	336.9	999.9	99.9	999.9	11.5	77.
26.5	93.2	10196.7	250.0	-40.7	99.9	247.2	27.0	24.9	10.4	345.6	999.9	99.9	999.9	15.5	75.
29.1	98.0	10911.0	225.0	-43.2	99.9	245.7	25.7	23.4	10.6	352.3	999.9	99.9	999.9	19.7	73.
32.1	103.3	11700.4	200.0	-45.0	99.9	242.6	20.7	18.4	9.5	361.6	999.9	99.9	999.9	23.8	72.
35.5	109.3	12585.9	175.0	-49.4	99.9	225.4	18.7	13.3	13.2	368.4	999.9	99.9	999.9	27.3	69.
39.3	115.3	13587.9	150.0	-52.2	99.9	242.7	15.5	13.8	7.1	380.2	999.9	99.9	999.9	31.2	67.
43.6	122.3	14765.8	125.0	-53.0	99.9	233.1	14.0	11.2	8.4	399.1	999.9	99.9	999.9	34.6	65.
49.0	130.3	16200.9	100.0	-52.8	99.9	193.4	9.9	2.3	9.6	425.8	999.9	99.9	999.9	37.6	63.
55.8	138.7	18038.4	75.0	-56.0	99.9	218.1	7.4	4.6	5.8	455.6	999.9	99.9	999.9	40.9	59.
64.7	147.0	20582.9	50.0	-58.6	99.9	218.6	7.4	4.6	5.8	505.4	999.9	99.9	999.9	42.1	58.
77.4	156.0	24998.4	25.0	-53.0	99.9	28.4	2.8	-1.3	-2.4	632.2	999.9	99.9	999.9	41.9	60.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 11601
MARSHALL SPACE FLIGHT CENTER

6 MAY 1975
1122 GMT

166 13. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.1	6.3	180.0	991.8	13.0	12.2	90.0	2.1	-2.1	0.0	288.0	311.3	9.1	95.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
0.6	7.7	324.9	975.0	15.2	14.3	184.4	5.2	3.4	5.2	291.8	319.3	10.6	94.7	2.2	307.
1.3	9.9	546.0	950.0	17.5	8.6	204.6	8.1	3.4	7.4	296.0	315.9	7.4	56.0	3.3	348.
2.3	11.9	774.1	925.0	17.3	8.6	212.1	8.4	4.5	7.1	298.0	318.7	7.6	56.5	0.8	14.
3.2	14.2	1007.7	900.0	15.5	13.5	210.4	6.6	3.4	5.7	299.0	328.1	10.9	87.9	1.2	21.
4.1	16.3	1247.0	875.0	14.8	6.7	196.5	7.1	2.0	6.8	300.1	319.5	7.1	58.2	1.6	20.
5.0	18.5	1492.2	850.0	13.8	6.3	208.5	6.5	3.1	5.8	301.5	321.0	7.1	60.6	2.0	21.
6.0	20.8	1743.4	825.0	12.2	5.2	240.9	6.0	5.2	2.9	302.4	321.2	6.8	62.3	2.3	24.
6.9	23.2	2001.1	800.0	11.1	3.2	262.4	7.4	7.3	1.0	303.8	320.7	6.0	58.2	2.8	30.
7.8	25.5	2255.5	775.0	9.4	-0.1	266.2	7.3	7.3	0.5	304.5	318.7	5.0	52.0	2.8	37.
8.8	27.9	2536.6	750.0	7.6	-2.0	272.8	7.7	7.6	-0.4	305.4	318.2	4.4	50.6	3.1	43.
9.9	30.6	2815.3	725.0	5.8	-4.8	289.3	6.8	6.4	-2.3	306.4	317.2	3.7	46.4	3.4	50.
10.9	33.2	3101.8	700.0	3.7	-7.2	305.4	6.4	5.2	-3.7	307.0	316.5	3.2	44.6	3.6	56.
12.1	35.7	3395.3	675.0	1.4	-11.4	306.3	7.0	5.6	-4.1	307.5	314.7	2.4	37.6	3.7	63.
13.2	38.4	3699.0	650.0	-1.0	-14.9	303.3	8.2	6.8	-4.5	308.0	313.7	1.9	34.2	4.0	69.
14.3	41.0	4010.1	625.0	-4.1	-13.8	301.9	10.3	8.7	-5.4	308.0	314.5	2.1	46.7	4.4	75.
15.6	43.9	4337.8	600.0	-6.5	-15.8	300.8	13.2	11.4	-6.8	308.7	314.4	1.9	47.5	5.1	82.
16.8	47.0	4662.3	575.0	-9.0	-21.0	303.3	16.3	13.6	-9.0	309.5	313.5	1.2	37.1	5.5	89.
18.0	50.1	5004.9	550.0	-12.1	-19.1	310.2	16.3	12.4	-10.5	309.9	314.7	1.5	55.7	6.9	96.
19.3	53.0	5358.5	525.0	-15.3	-23.6	302.5	16.7	14.1	-9.0	310.1	313.6	1.1	49.0	8.1	100.
20.8	56.1	5730.0	500.0	-13.3	-32.6	300.7	16.7	14.4	-8.5	316.8	318.5	0.5	17.8	9.4	103.
22.2	59.4	6118.3	475.0	-16.3	-33.7	305.3	17.4	14.2	-10.1	317.8	319.4	0.5	20.6	10.8	106.
23.5	62.9	6522.5	450.0	-19.5	-36.1	306.4	19.0	15.3	-11.3	318.7	320.0	0.4	21.3	12.2	108.
24.9	66.3	6944.0	425.0	-23.0	-38.4	310.4	17.4	13.3	-11.3	319.4	320.6	0.3	22.8	13.5	110.
26.3	69.5	7386.0	400.0	-26.5	-41.3	305.5	19.1	15.6	-11.1	320.5	321.5	0.3	23.0	15.3	113.
28.2	73.8	7861.1	375.0	-29.9	-44.2	304.4	20.7	17.1	-11.7	321.9	322.7	0.2	23.2	17.3	114.
30.0	78.0	8349.7	350.0	-33.2	-47.0	302.4	22.5	19.0	-12.1	323.9	324.5	0.2	23.4	19.5	115.
31.9	82.2	8866.4	325.0	-37.0	-50.2	305.4	27.6	22.5	-16.0	325.6	326.0	0.1	23.6	22.3	116.
33.9	86.4	9415.9	300.0	-40.6	-59.9	297.2	31.7	28.2	-14.5	328.2	999.9	99.9	999.9	25.7	117.
35.8	91.4	10003.0	275.0	-45.5	-59.9	285.3	39.6	38.2	-10.5	329.4	999.9	99.9	999.9	29.7	116.
37.8	96.3	10631.1	250.0	-50.9	-59.9	282.0	42.1	41.2	-8.8	330.5	999.9	99.9	999.9	34.6	114.
40.2	101.8	11309.4	225.0	-55.5	-59.9	284.3	43.7	42.4	-10.8	333.5	999.9	99.9	999.9	41.0	112.
42.5	107.8	12048.8	200.0	-61.9	-59.9	294.4	41.9	38.2	-17.3	334.8	999.9	99.9	999.9	46.6	112.
45.4	114.3	12867.7	175.0	-66.3	-59.9	303.1	33.6	28.1	-18.4	340.6	999.9	99.9	999.9	53.6	113.
48.5	121.3	13805.0	150.0	-64.9	-59.9	293.6	53.8	49.3	-21.5	358.2	999.9	99.9	999.9	58.4	113.
52.4	129.3	14917.1	125.0	-64.2	-59.9	254.8	28.1	25.5	-11.8	378.8	999.9	99.9	999.9	67.0	114.
56.8	137.7	16284.5	100.0	-64.4	-59.9	285.1	23.6	22.7	-6.2	403.4	999.9	99.9	999.9	73.8	114.
62.6	146.5	18051.8	75.0	-64.7	-59.9	262.6	9.9	9.8	1.3	437.3	999.9	99.9	999.9	79.1	113.
70.0	156.3	20541.8	50.0	-59.1	-59.9	34.1	5.4	-3.0	-4.4	504.3	999.9	99.9	999.9	81.8	113.
81.3	166.5	24950.3	25.0	-53.0	-59.9	89.5	5.1	-5.1	-0.0	632.4	999.9	99.9	999.9	81.5	114.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 22002
FT. SILL. OKLA

6 MAY 1975
1110 GMT

150 24. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.2	362.0	960.0	21.3	19.8	170.0	8.0	-1.4	7.9	300.0	340.4	15.3	91.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.3	10.1	453.1	950.0	20.5	19.9	183.6	8.6	0.5	8.5	300.1	341.3	15.6	96.6	0.2	344.
1.1	12.1	684.2	925.0	19.4	18.8	187.9	9.2	1.3	9.1	301.1	340.8	15.0	96.4	0.5	356.
2.0	14.4	920.4	900.0	18.2	17.1	202.1	11.0	4.1	10.2	302.1	339.0	13.8	93.6	1.1	5.
2.9	16.4	1162.9	875.0	18.8	15.4	221.9	15.8	10.6	11.6	305.0	339.5	12.7	80.9	1.6	15.
3.7	18.7	1412.8	850.0	19.3	11.5	231.1	19.3	15.0	12.1	307.8	336.7	10.1	60.6	2.5	27.
4.7	20.7	1669.4	825.0	17.6	9.4	223.0	19.0	13.0	13.9	308.5	333.8	9.0	58.4	3.5	34.
5.6	23.3	1931.7	800.0	15.1	7.3	219.0	16.7	10.5	13.9	308.4	331.1	8.1	59.4	4.6	35.
6.7	25.6	2200.4	775.0	13.7	4.3	211.1	17.9	9.2	15.3	309.4	328.7	6.7	52.9	5.7	35.
7.7	28.0	2475.7	750.0	12.0	-2.2	217.7	19.0	11.6	15.0	310.2	323.0	4.4	37.1	6.8	35.
8.6	30.6	2758.4	725.0	9.3	-5.1	222.8	18.5	12.6	13.6	310.1	320.8	3.6	35.6	7.9	36.
9.7	33.2	3047.8	700.0	6.7	-6.9	221.9	18.0	12.0	13.4	310.3	320.1	3.3	37.2	9.0	37.
10.8	35.7	3345.2	675.0	4.2	-9.5	217.4	16.5	10.0	13.1	310.7	319.1	2.8	36.0	10.1	37.
11.8	38.4	3650.9	650.0	1.6	-11.3	212.2	14.9	8.0	12.6	311.1	318.7	2.5	37.6	11.1	37.
12.9	41.0	3965.5	625.0	-0.8	-13.8	212.4	13.3	7.1	11.3	311.2	318.4	2.1	36.5	12.0	36.
14.1	43.9	4289.7	600.0	-3.9	-14.2	216.5	13.2	7.8	10.6	311.8	318.4	2.1	44.5	12.9	36.
15.2	46.9	4624.0	575.0	-7.1	-15.2	215.9	17.0	10.9	13.0	311.9	318.3	2.0	52.2	13.9	36.
16.4	49.9	4969.7	550.0	-8.7	-24.1	230.8	19.1	14.8	12.0	313.9	317.1	1.0	27.5	15.3	37.
17.8	52.9	5330.9	525.0	-7.9	-33.8	234.3	19.4	15.7	11.3	318.9	320.4	0.4	10.3	16.7	39.
19.1	55.9	5707.5	500.0	-11.4	-34.6	234.0	21.4	17.3	12.6	319.1	320.5	0.4	12.5	18.3	40.
20.4	59.0	6058.5	475.0	-14.2	-36.7	230.6	21.8	16.8	13.8	320.4	321.6	0.3	12.8	20.0	41.
21.8	62.6	6505.8	450.0	-17.9	-39.4	226.6	21.4	15.5	14.7	320.7	321.7	0.3	13.1	21.8	42.
23.1	65.9	6937.1	425.0	-21.6	-39.8	228.0	23.8	17.7	15.9	321.3	322.3	0.3	17.2	23.5	42.
24.5	69.5	7373.7	400.0	-25.0	-42.3	225.0	24.0	16.9	16.9	322.5	323.3	0.2	17.9	25.5	42.
26.1	73.2	7839.3	375.0	-28.8	-45.8	221.2	23.4	15.4	17.6	323.4	324.0	0.2	17.5	27.7	42.
27.7	77.2	8328.8	350.0	-32.8	-48.2	224.1	23.9	16.6	17.1	324.5	325.0	0.1	19.4	29.9	42.
29.4	81.2	8845.9	325.0	-36.9	-51.2	228.7	25.4	19.0	16.7	325.8	326.1	0.1	22.8	32.4	43.
31.1	85.6	9395.3	300.0	-41.0	99.9	232.8	25.7	20.4	15.5	327.6	999.9	99.9	999.9	35.2	43.
33.0	90.2	9980.4	275.0	-46.0	99.9	234.3	27.1	22.0	15.8	328.6	999.9	99.9	999.9	37.8	44.
34.9	95.1	10678.9	250.0	-50.0	99.9	239.9	30.1	26.0	15.1	331.8	999.9	99.9	999.9	41.1	45.
37.0	100.2	11290.7	225.0	-54.4	99.9	243.1	28.4	25.3	12.9	335.2	999.9	99.9	999.9	44.8	46.
39.1	105.6	12037.2	200.0	-58.9	99.9	246.0	32.7	29.9	13.3	339.4	999.9	99.9	999.9	48.4	48.
41.3	111.5	12865.9	175.0	-62.6	99.9	244.0	30.5	27.4	13.4	340.7	999.9	99.9	999.9	52.5	49.
44.0	118.0	13817.8	150.0	-61.9	99.9	253.6	30.9	29.7	8.8	363.4	999.9	99.9	999.9	57.5	51.
46.7	125.3	14948.3	125.0	-60.6	99.9	266.3	19.7	19.6	1.3	385.3	999.9	99.9	999.9	62.4	53.
49.9	133.3	16337.4	100.0	-63.8	99.9	266.3	14.2	14.2	0.9	404.6	999.9	99.9	999.9	64.9	54.
54.5	141.0	18110.5	75.0	-62.1	99.9	313.9	4.0	2.9	-2.8	442.7	999.9	99.9	999.9	67.1	55.
59.8	149.0	20616.6	50.0	-57.7	99.9	53.0	1.8	-1.4	-1.1	507.6	999.9	99.9	999.9	66.0	56.
69.1	157.7	25056.0	25.0	-50.6	99.9	999.9	99.9	99.9	99.9	639.4	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 235
JACKSON, MISS

6 MAY 1975
1515 GMT

31 719. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SFC	U COMP M/SFC	V COMP M/SFC	POT T DG K	F POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	5.3	100.0	1001.0	17.8	17.5	100.0	4.2	-4.1	0.7	292.6	325.2	12.7	98.0	0.0	0.
0.1	5.4	108.6	1000.0	17.9	17.5	999.9	99.9	99.9	99.9	292.7	325.5	12.7	97.7	999.9	999.
0.9	7.3	326.8	975.0	18.8	17.8	999.9	99.9	99.9	99.9	295.9	330.5	13.3	93.9	999.9	999.
1.8	12.3	549.9	950.0	17.0	16.0	999.9	99.9	99.9	99.9	296.0	327.3	12.2	94.0	999.9	999.
2.7	12.5	777.8	925.0	16.1	15.2	999.9	99.9	99.9	99.9	297.3	328.6	11.9	94.4	999.9	999.
3.7	15.3	1011.4	900.0	15.5	14.2	229.4	2.4	1.8	1.6	299.0	329.5	11.4	92.0	7.3	129.
4.5	17.8	1251.7	875.0	14.5	13.0	197.1	2.7	0.8	2.6	300.3	329.3	10.8	90.6	0.3	116.
5.5	20.5	1494.6	850.0	11.2	9.6	171.3	4.6	-0.7	4.5	299.1	323.0	8.9	89.5	0.3	52.
6.6	23.1	1744.1	825.0	10.3	8.4	169.7	3.6	-0.6	3.6	300.6	323.5	8.4	87.8	0.5	22.
7.8	25.7	2000.5	800.0	9.4	7.8	201.1	7.7	2.8	7.1	302.3	325.1	8.3	89.5	0.8	21.
8.8	28.5	2263.9	775.0	8.2	6.6	192.0	9.4	2.0	9.2	303.7	325.7	8.0	89.8	1.4	18.
9.7	31.4	2534.7	750.0	6.5	5.0	999.9	99.9	99.9	99.9	304.5	325.1	7.3	90.0	999.9	999.
11.1	34.3	2811.8	725.0	3.5	2.1	999.9	99.9	99.9	99.9	304.1	321.5	6.2	90.2	999.9	999.
99.9	99.9	99.9	700.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	675.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	650.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	625.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	600.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	575.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	550.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	525.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	500.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	475.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	450.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	425.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	400.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	375.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	350.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	325.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	275.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	250.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	225.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	200.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	175.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 240
LAKE CHARLES, LA

6 MAY 1975
1415 GMT

161 23. 0

TIME MIN	CNT CT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.3	5.0	1008.0	25.0	22.9	130.0	5.2	-4.0	3.3	299.9	346.3	17.7	88.0	0.0	0.
0.1	4.9	75.4	1000.0	25.0	24.1	999.9	99.9	99.9	99.9	300.8	351.5	19.3	94.9	999.9	999.
0.9	6.7	297.9	975.0	22.5	22.0	999.9	99.9	99.9	99.9	300.1	345.7	17.4	97.1	999.9	999.
1.6	8.5	524.7	950.0	21.3	20.8	999.9	99.9	99.9	99.9	301.0	344.6	16.5	96.9	999.9	999.
2.3	10.5	756.3	925.0	19.7	19.1	179.2	9.2	-0.1	9.2	301.5	342.1	15.3	96.7	1.2	336.
3.1	12.5	992.7	900.0	18.2	17.6	190.6	10.1	1.8	4.9	302.2	340.3	14.3	96.4	1.6	344.
3.9	14.6	1234.4	875.0	16.5	15.7	198.7	10.4	3.3	9.8	302.6	337.5	13.0	95.4	2.1	351.
4.7	16.5	1481.7	850.0	15.5	14.7	217.3	10.7	6.5	8.5	304.1	338.1	12.5	94.9	2.5	358.
5.6	18.8	1735.5	825.0	14.3	13.7	227.5	13.6	10.0	9.2	305.3	338.2	12.0	96.0	3.0	7.
6.5	20.9	1995.9	800.0	13.4	12.9	225.4	15.4	10.9	10.8	307.0	339.3	11.7	96.0	3.6	15.
7.2	23.1	2263.0	775.0	11.5	4.9	228.6	15.1	11.3	10.0	307.1	327.1	7.1	64.0	4.2	20.
8.1	25.4	2537.8	750.0	12.2	-5.1	234.7	13.3	10.8	7.7	310.4	321.3	3.7	30.8	4.9	24.
9.0	27.6	2820.9	725.0	10.9	-18.9	255.4	12.2	11.8	3.1	311.5	315.3	1.2	10.6	5.4	29.
9.9	30.1	3111.9	700.0	9.0	-22.1	275.2	14.1	14.1	-1.3	312.6	315.6	0.9	9.0	5.8	34.
10.9	32.6	3411.6	675.0	6.9	-25.9	283.6	17.1	16.7	-4.0	313.4	315.7	0.7	7.5	6.3	43.
12.0	35.2	3719.8	650.0	4.3	-30.4	281.0	18.5	18.1	-3.5	313.8	315.4	0.5	5.8	6.9	51.
13.1	37.7	4037.2	625.0	1.6	-31.9	271.9	19.9	19.8	-0.7	314.3	315.	0.4	6.1	7.3	58.
14.1	40.3	4364.8	600.0	0.2	-31.2	267.9	24.5	24.4	0.9	316.4	318.0	0.5	7.5	9.0	62.
15.3	42.9	4704.3	575.0	-2.2	-21.9	264.7	28.2	28.1	2.6	317.5	321.3	1.2	20.5	10.7	66.
16.3	45.8	5055.6	550.0	-4.3	-25.2	259.5	29.1	28.7	5.3	319.1	322.0	0.9	17.6	12.5	69.
17.4	48.0	5420.3	525.0	-7.0	-46.1	259.0	25.6	25.1	4.9	319.9	320.4	0.1	2.8	14.4	70.
18.6	51.6	5798.9	500.0	-9.4	-55.8	263.8	19.7	19.6	2.1	321.6	321.7	0.0	1.0	15.9	71.
19.9	54.3	6193.9	475.0	-11.2	-57.0	258.8	17.3	17.0	3.4	324.0	324.1	0.0	1.0	17.3	72.
21.3	57.9	6606.4	450.0	-14.2	-58.9	268.6	17.4	17.4	0.4	325.3	325.4	0.7	1.0	18.7	73.
22.8	61.3	7037.7	425.0	-17.1	-60.8	284.3	21.9	21.2	-5.4	327.0	327.1	0.0	1.0	20.3	75.
24.2	64.9	7485.4	400.0	-20.6	-56.5	282.7	24.2	23.6	-5.3	328.1	328.3	0.0	2.3	22.0	77.
25.8	68.3	7963.7	375.0	-24.3	-57.8	276.9	28.0	27.8	-3.4	329.4	329.6	0.0	2.7	24.4	80.
27.6	72.0	8461.9	350.0	-28.6	-57.2	274.3	28.9	28.8	-2.2	330.1	330.3	0.0	4.5	27.5	81.
29.5	76.2	8988.4	325.0	-32.8	-50.7	278.8	33.3	32.9	-5.1	331.4	331.8	0.1	14.7	30.6	83.
31.4	80.3	9546.5	300.0	-37.4	-51.6	273.0	35.3	35.2	-1.8	332.6	333.0	0.1	20.8	34.5	84.
33.5	84.8	10142.0	275.0	-41.9	99.9	267.4	36.7	36.6	1.6	334.6	999.9	99.9	999.9	39.0	85.
35.7	89.4	10779.2	250.0	-47.6	99.9	268.7	38.9	38.9	0.9	335.3	999.9	99.9	999.9	44.1	85.
38.3	94.8	11469.6	225.0	-51.5	99.9	271.6	41.4	41.4	-1.2	339.6	999.9	99.9	999.9	50.5	86.
40.9	100.2	12225.0	200.0	-57.1	99.9	273.4	38.8	38.7	-2.3	342.3	999.9	99.9	999.9	56.8	87.
43.9	106.3	13061.0	175.0	-61.7	99.9	274.2	31.8	31.7	-2.3	348.2	999.9	99.9	999.9	63.7	87.
47.3	113.0	14009.1	150.0	-63.6	99.9	270.2	37.1	37.1	-0.1	360.5	999.9	99.9	999.9	71.8	88.
51.2	120.7	15125.2	125.0	-65.5	99.9	273.6	54.2*	54.1	-3.4	376.3	999.9	99.9	999.9	80.2	89.
55.9	129.7	16457.6	100.0	-71.4	99.9	278.6	42.0*	41.5	-6.3	389.7	999.9	99.9	999.9	92.1	90.
61.0	139.5	18185.0	75.0	-70.9	99.9	61.5	5.9*	-5.2	-2.8	424.2	999.9	99.9	999.9	97.3	91.
68.4	150.5	20665.1	50.0	-62.2	99.9	102.1	7.5	-7.4	1.6	457.0	999.9	99.9	999.9	96.6	91.
80.8	163.0	25102.9	25.0	-48.2	99.9	999.9	99.9	99.9	99.9	646.1	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 246
SHPEVEPONT, LA

6 MAY 1975
1506 GMT

163 13. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.1	79.0	998.3	21.7	18.9	140.0	4.2	-2.7	3.2	296.9	333.2	13.9	84.0	3.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
0.7	7.0	285.1	675.0	21.5	19.8	162.9	8.7	-2.6	8.3	298.8	338.5	15.1	90.4	0.3	329.
1.6	9.3	510.9	950.0	20.6	19.8	177.9	13.4	-0.5	13.4	300.2	341.0	15.5	95.1	1.0	343.
2.7	11.4	742.3	925.0	20.0	19.1	188.7	14.4	2.2	14.2	301.8	342.4	15.3	95.0	1.8	353.
3.5	13.8	979.1	900.0	18.6	17.7	195.8	13.2	3.6	12.7	302.6	341.0	14.4	94.8	2.5	359.
4.5	16.0	1221.3	875.0	17.5	16.7	200.5	11.2	3.9	10.5	303.9	341.1	13.8	94.6	3.2	2.
5.4	18.4	1469.5	850.0	15.9	14.8	201.0	10.3	3.7	9.6	304.5	338.6	12.6	92.8	3.8	5.
6.5	20.8	1723.4	825.0	14.3	12.9	201.4	8.5	3.1	8.0	305.2	336.5	11.5	91.5	4.3	8.
7.5	23.2	1983.3	800.0	12.4	11.1	207.7	6.4	3.0	5.7	305.8	334.5	10.4	91.3	4.8	9.
8.7	25.7	2250.1	775.0	11.3	9.7	207.1	5.1	2.3	4.5	307.2	334.5	9.8	90.1	5.2	11.
9.7	28.2	2523.9	750.0	9.8	7.5	227.8	2.6	1.9	1.9	308.4	332.9	8.7	85.3	5.4	11.
10.9	30.9	2816.3	725.0	10.0	3.3	322.6	3.5	2.1	-2.8	311.3	330.7	6.7	62.9	5.3	13.
12.0	33.6	3097.6	700.0	8.3	-2.8	319.9	5.5	3.5	-4.2	312.3	325.7	4.5	46.1	5.2	16.
13.4	36.1	3396.7	675.0	6.1	-11.4	313.5	7.9	5.7	-5.4	312.7	320.2	2.4	27.6	4.9	21.
14.8	39.3	3704.0	650.0	3.4	-20.3	298.6	7.9	6.9	-3.8	313.0	316.7	1.2	15.5	4.8	30.
16.2	41.7	4021.7	625.0	1.0	-18.3	281.3	6.2	6.1	-1.2	313.7	310.3	1.4	22.0	4.9	36.
17.5	44.6	4347.6	600.0	-1.0	-23.5	263.0	9.0	8.9	1.1	315.1	318.2	1.0	16.2	5.2	41.
18.8	47.6	4685.4	575.0	-3.8	-27.6	273.0	10.0	10.0	-0.5	315.6	317.9	0.7	13.7	5.8	47.
20.4	50.6	5034.6	550.0	-6.1	-38.0	277.8	11.3	11.2	-1.5	316.6	317.8	0.3	6.7	6.4	54.
21.9	53.6	5397.7	525.0	-7.2	-40.7	253.5	13.1	12.6	3.7	319.8	320.5	0.2	4.8	7.5	58.
23.6	56.6	5776.0	500.0	-9.8	-42.0	244.2	15.1	13.6	6.6	321.1	321.8	0.2	5.1	8.8	63.
25.3	60.0	6155.4	475.0	-12.7	-43.6	241.4	17.2	15.1	8.2	322.2	322.8	0.2	5.5	10.5	60.
26.9	63.4	6579.5	450.0	-15.8	-45.3	245.6	16.0	14.6	6.6	323.3	323.8	0.1	5.8	12.0	60.
28.4	66.7	7007.8	425.0	-18.8	-47.0	246.6	16.3	15.0	6.5	324.9	325.4	0.1	6.2	13.4	61.
30.1	70.4	7457.1	400.0	-21.3	-48.5	257.7	19.1	18.7	4.1	327.3	327.7	0.1	6.5	15.3	62.
31.9	74.0	7929.8	375.0	-24.8	-50.7	265.5	24.5	24.4	1.9	328.8	329.1	0.1	6.9	17.4	65.
33.9	78.0	8427.7	350.0	-28.8	-53.3	269.9	26.3	26.3	0.0	329.8	330.1	0.1	7.4	20.4	68.
35.8	81.7	8953.5	325.0	-33.0	-54.9	268.8	30.3	30.3	0.6	331.1	331.4	0.1	9.0	23.2	71.
38.0	85.9	9510.7	300.0	-37.8	-53.3	267.7	35.9	35.9	1.5	332.0	332.3	0.1	17.9	27.8	74.
40.6	90.4	10104.1	275.0	-43.1	99.9	267.2	32.3	32.2	1.6	332.8	999.9	99.9	999.9	32.9	76.
43.0	95.2	10739.2	250.0	-47.9	99.9	263.1	35.5	35.2	4.2	334.9	999.9	99.9	999.9	37.8	77.
45.7	100.0	11427.5	225.0	-51.8	99.9	265.1	34.5	34.4	2.9	339.1	999.9	99.9	999.9	43.3	78.
48.9	105.5	12183.3	200.0	-56.8	99.9	271.5	34.6	34.6	-0.9	342.8	999.9	99.9	999.9	49.8	80.
51.9	111.3	13118.6	175.0	-61.6	99.9	262.4	28.3	28.1	3.8	348.3	999.9	99.9	999.9	56.1	81.
55.3	117.5	13969.9	150.0	-64.2	99.9	262.3	27.5	27.2	3.7	359.6	999.9	99.9	999.9	62.7	80.
59.5	125.0	15091.5	125.0	-63.2	99.9	274.8	33.8	33.7	-2.9	380.5	999.9	99.9	999.9	71.6	81.
64.4	133.0	16454.0	100.0	-65.5	99.9	276.0	30.5	30.3	-3.2	401.2	999.9	99.9	999.9	80.6	82.
70.4	141.3	18203.0	75.0	-65.8	99.9	353.8	3.7	0.4	-3.7	435.0	999.9	99.9	999.9	86.5	84.
78.7	151.0	20692.9	50.0	-57.8	99.9	258.0	14.3	14.0	3.0	507.3	999.9	99.9	999.9	85.9	84.
91.8	161.5	25151.2	25.0	-48.5	99.9	169.5	1.6	-0.3	1.5	645.5	999.9	99.9	999.9	84.2	85.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 250
BROWNSVILLE, TEX

6 MAY 1975

1500 GMT

166 23. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRFS MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CC4P M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.8	7.0	1002.4	26.7	24.0	150.0	5.2	-2.6	4.5	302.2	352.6	19.1	85.0	0.0	0.
0.1	5.0	28.3	1000.0	25.9	25.4	324.8	3.4	2.0	-2.8	301.8	356.8	20.9	97.4	0.4	333.
0.8	7.0	252.0	975.0	24.2	23.9	223.1	1.2	0.8	0.9	302.1	353.7	19.6	98.3	0.3	334.
1.6	5.3	480.4	950.0	22.9	22.4	174.7	12.3	-1.1	12.2	302.8	351.4	18.3	97.3	0.7	343.
2.6	11.5	713.2	925.0	21.0	20.7	180.8	12.1	0.2	12.1	303.1	348.0	16.9	97.9	1.4	352.
3.5	13.8	956.9	900.0	19.3	18.3	180.9	12.4	0.2	12.4	303.4	343.3	14.9	94.2	2.1	355.
4.3	15.9	1194.1	875.0	23.9	-1.1	194.6	8.7	2.2	8.4	309.2	321.5	4.2	21.1	2.6	357.
5.1	18.4	1448.7	850.0	26.5	-3.5	202.1	6.7	2.5	6.2	314.4	324.9	3.5	13.6	2.9	350.
6.0	20.7	1710.8	825.0	24.9	-4.4	206.2	7.6	3.4	6.8	315.4	325.6	3.3	14.0	3.3	2.
7.0	23.1	1978.8	800.0	21.6	7.1	210.1	9.9	4.9	8.5	315.3	338.4	8.0	39.2	3.7	6.
7.9	25.5	2253.2	775.0	18.9	8.1	213.5	10.6	5.9	8.8	315.4	340.9	8.8	49.6	4.2	9.
8.9	28.0	2533.7	750.0	16.7	5.2	217.6	11.8	7.2	9.3	315.8	337.5	7.4	46.5	4.8	13.
9.8	30.6	2821.9	725.0	15.0	-1.8	217.9	12.7	7.8	10.0	316.5	330.5	4.6	31.5	5.5	16.
10.9	33.3	3117.7	700.0	12.7	-2.0	215.8	10.6	6.2	8.6	317.2	331.5	4.8	36.1	6.3	19.
12.0	35.9	3421.7	675.0	10.9	-10.4	217.7	7.4	4.5	5.9	318.2	326.3	2.6	21.3	6.8	20.
12.9	38.6	3734.7	650.0	8.4	-12.7	225.1	7.4	5.2	5.2	318.7	325.7	2.2	20.9	7.1	21.
14.0	41.3	4057.1	625.0	5.8	-14.8	227.9	9.5	7.0	6.4	319.3	325.5	1.9	21.0	7.6	23.
15.1	44.3	4385.1	600.0	2.9	-15.7	230.4	11.5	8.9	7.3	319.6	325.7	1.9	23.9	8.2	25.
16.1	47.3	4731.7	575.0	-0.1	-20.8	233.8	13.1	10.5	7.7	320.0	324.2	1.3	19.5	8.9	27.
17.3	50.3	5085.9	550.0	-2.8	-15.7	242.2	13.1	11.6	6.1	321.0	327.6	2.1	36.5	9.7	30.
18.4	53.4	5452.1	525.0	-6.2	-15.6	252.3	14.1	13.5	4.3	321.2	328.1	2.2	47.2	10.5	33.
19.8	56.5	5832.3	500.0	-8.5	-29.1	256.5	17.7	17.2	4.1	322.7	325.1	0.7	17.4	11.4	37.
21.0	59.9	6227.7	475.0	-11.4	-40.3	254.1	20.6	19.8	5.6	323.8	324.7	0.2	7.0	12.6	41.
22.4	63.3	6640.4	450.0	-14.1	-32.7	252.7	22.8	21.8	6.8	325.5	327.4	0.5	19.0	14.2	45.
23.9	66.7	7072.0	425.0	-16.5	-45.3	255.5	22.3	21.6	5.6	327.7	328.4	0.2	7.0	16.0	49.
25.3	70.4	7525.4	400.0	-19.6	-48.7	259.4	21.4	21.0	3.9	329.5	329.9	0.1	5.5	17.6	52.
26.9	74.2	8001.0	375.0	-22.6	-48.9	255.7	25.0	24.2	6.2	331.6	332.1	0.1	7.0	19.5	55.
28.6	78.3	8565.2	350.0	-25.4	-47.3	246.2	27.2	24.9	11.0	334.4	335.0	0.1	11.0	22.2	56.
30.4	82.2	9037.4	325.0	-30.2	-48.6	247.0	26.8	24.7	10.5	335.0	335.6	0.1	14.6	25.2	57.
32.3	86.6	9601.6	300.0	-34.7	-52.0	256.2	30.0	29.1	7.2	336.4	336.8	0.1	15.1	28.2	59.
34.3	91.4	10203.4	275.0	-39.8	99.9	246.7	30.6	28.1	12.1	337.5	999.9	99.9	999.9	31.8	61.
36.4	96.2	10848.3	250.0	-44.1	99.9	248.0	36.6	33.9	13.7	340.5	999.9	99.9	999.9	35.9	61.
38.8	101.4	11545.1	225.0	-50.7	99.9	254.1	38.0	36.6	10.4	340.9	999.9	99.9	999.9	41.4	62.
41.5	107.3	12303.0	200.0	-56.3	99.9	256.1	43.7	42.4	10.5	343.6	999.9	99.9	999.9	47.7	64.
44.5	113.5	13144.0	175.0	-59.2	99.9	262.6	38.3	38.0	5.0	352.3	999.9	99.9	999.9	54.7	66.
47.8	120.3	14101.5	150.0	-63.3	99.9	261.0	38.8	38.3	6.1	361.0	999.9	99.9	999.9	62.3	68.
51.8	128.3	15209.6	125.0	-68.3	99.9	252.3	31.1	29.7	9.5	371.3	999.9	99.9	999.9	70.0	69.
56.5	137.1	16539.5	100.0	-71.2	99.9	296.1	16.1	14.4	-7.1	390.2	999.9	99.9	999.9	75.8	71.
61.8	146.3	18211.3	75.0	-78.5	99.9	320.8	2.2	1.4	-1.7	408.3	999.9	99.9	999.9	78.6	73.
70.0	157.0	20674.3	50.0	-89.5	99.9	28.1	6.4	-3.0	-5.6	503.2	999.9	99.9	999.9	78.3	73.
82.0	168.3	25130.4	25.0	-49.3	99.9	999.9	99.9	99.9	99.9	642.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. : 25E
VICTORIA, TEX

6 MAY 1975
1415 GMT

153 31. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.4	33.0	1000.4	25.8	23.5	170.0	5.2	-0.9	5.1	301.4	350.2	18.5	87.0	0.0	0.
0.0	5.4	36.6	1000.0	25.8	23.5	169.6	5.1	-0.9	5.0	301.5	350.5	18.6	87.5	0.0	0.
1.0	7.6	260.3	975.0	23.9	23.7	168.7	6.2	-1.2	6.1	301.9	352.9	19.4	98.8	0.3	357.
1.8	10.0	488.0	950.0	22.3	22.2	170.0	9.0	-1.6	8.8	302.3	350.1	18.1	99.1	0.7	354.
2.7	12.2	720.8	925.0	20.9	20.8	169.4	8.8	-1.6	8.6	303.0	348.4	17.1	99.6	1.2	352.
3.6	14.7	558.7	900.0	24.4	7.9	165.6	9.8	-2.4	9.5	307.7	329.1	7.5	34.9	1.7	350.
4.5	17.0	1206.3	875.0	26.2	-3.4	159.2	9.4	-3.3	8.9	311.5	321.7	3.4	14.0	2.2	349.
5.4	19.6	1461.1	850.0	25.6	-6.7	158.3	8.7	-3.2	8.1	313.4	321.7	2.7	11.3	2.7	347.
6.3	22.0	1721.7	825.0	23.5	-8.1	166.4	4.4	-1.0	4.2	313.8	321.5	2.5	11.5	3.1	346.
7.3	24.7	1988.9	800.0	21.5	-6.3	220.4	3.8	2.5	2.9	314.5	323.6	3.0	14.9	3.2	348.
8.4	27.2	2262.2	775.0	19.1	-8.0	234.2	3.8	3.1	2.2	314.7	323.0	2.7	15.1	3.4	352.
9.4	29.9	2542.2	750.0	17.1	-9.5	248.5	3.9	3.7	1.4	315.4	323.1	2.5	15.3	3.4	355.
10.4	32.7	2829.3	725.0	14.1	-11.7	249.6	4.4	4.1	1.5	315.2	322.0	2.2	15.5	3.5	360.
11.6	35.5	3123.6	700.0	11.2	-12.5	228.5	5.5	4.1	3.6	315.2	321.7	2.1	17.5	3.7	4.
12.8	38.2	3425.5	675.0	8.6	-13.6	227.3	6.6	4.9	4.5	315.6	321.8	2.0	19.0	4.0	8.
13.9	40.9	3735.6	650.0	5.8	-14.9	228.0	7.7	5.7	5.1	315.7	321.6	1.9	20.9	4.4	12.
15.1	43.9	4054.5	625.0	2.5	-16.1	231.3	8.8	6.9	5.5	315.5	321.1	1.7	23.7	4.9	16.
16.3	47.0	4382.7	600.0	-0.4	-16.5	245.1	9.6	8.7	4.1	315.8	321.4	1.8	28.5	5.4	21.
17.6	50.1	4721.4	575.0	-3.1	-15.7	240.0	13.5	11.7	6.8	316.6	322.8	2.0	37.0	6.1	27.
18.9	53.1	5072.0	550.0	-5.7	-13.5	230.1	17.4	13.3	11.1	317.6	325.3	2.5	54.2	7.2	31.
20.2	56.1	5434.9	525.0	-8.7	-13.0	228.3	20.0	15.0	13.3	318.2	326.6	2.7	70.9	8.5	34.
21.6	59.6	5811.3	500.0	-10.9	-51.4	240.9	21.5	18.8	10.5	319.7	320.3	0.1	2.1	10.2	37.
23.0	63.1	6204.2	475.0	-12.4	-54.8	250.5	21.1	19.9	7.0	322.5	322.7	0.0	1.5	11.8	42.
24.5	66.4	6615.0	450.0	-15.0	-55.1	255.6	21.4	20.8	5.3	324.3	324.5	0.0	1.7	13.5	46.
26.1	70.1	7044.8	425.0	-17.8	-55.7	255.1	22.7	21.9	5.8	326.1	326.3	0.0	2.0	15.4	50.
27.9	73.8	7495.0	400.0	-20.9	-56.6	254.1	23.1	22.2	6.3	327.8	328.0	0.0	2.4	17.5	53.
29.6	77.8	7968.8	375.0	-24.8	-53.9	255.6	26.0	25.2	6.5	328.7	329.0	0.1	4.7	20.0	56.
31.4	81.7	8467.0	350.0	-28.6	-53.2	259.0	28.7	28.1	5.5	330.1	330.4	0.1	7.4	22.8	58.
33.2	85.9	8993.4	325.0	-32.1	-54.2	258.8	34.7	34.0	6.7	332.4	332.7	0.1	9.0	25.9	61.
35.3	90.4	9553.6	300.0	-36.8	-47.1	257.3	36.4	35.5	8.0	333.4	334.1	0.2	33.4	30.1	64.
37.4	95.0	10149.9	275.0	-41.2	99.9	256.4	39.3	38.2	9.2	335.5	999.9	99.9	999.9	34.7	66.
39.8	99.8	10790.1	250.0	-46.7	99.9	256.1	40.3	39.6	7.6	336.7	999.9	99.9	999.9	40.2	67.
42.6	105.0	11479.8	225.0	-52.9	99.9	259.3	43.6	42.9	8.1	337.5	999.9	99.9	999.9	47.1	69.
45.5	110.4	12230.8	200.0	-57.7	99.9	262.1	41.7	41.3	5.7	341.4	999.9	99.9	999.9	54.4	71.
48.6	116.3	13067.7	175.0	-60.4	99.9	259.1	47.6	46.7	9.3	350.3	999.9	99.9	999.9	63.0	72.
52.3	122.7	14025.3	150.0	-61.5	99.9	257.3	41.7	40.7	9.2	364.2	999.9	99.9	999.9	71.5	73.
56.3	129.3	15146.2	125.0	-65.1	99.9	266.5	37.2*	37.1	2.3	377.1	999.9	99.9	999.9	81.7	73.
61.3	136.5	16494.1	100.0	-69.8	99.9	301.0	16.6*	14.2	-8.5	393.0	999.9	99.9	999.9	88.9	76.
67.0	143.3	18180.4	75.0	-73.7	99.9	278.5	13.8	13.6	-2.0	418.4	999.9	99.9	999.9	93.6	77.
76.0	151.0	20688.6	50.0	-60.6	99.9	56.5	5.2	-4.3	-2.9	500.8	999.9	99.9	999.9	92.8	78.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 260
STEPHENVILLE, TEX

6 MAY 1975
1415 GMT

161 12. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.1	9.6	399.0	959.0	23.0	17.7	200.0	3.6	1.2	3.4	301.5	337.4	13.4	72.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.3	10.4	481.4	950.0	21.9	17.6	221.9	8.0	5.3	5.9	301.2	337.2	13.5	76.7	0.2	23.
1.1	12.6	712.9	925.0	20.5	15.9	237.4	10.4	8.8	5.6	302.0	335.4	12.5	75.2	0.5	37.
2.0	14.9	550.2	900.0	20.6	15.4	251.4	16.6	15.7	5.3	304.4	338.0	12.4	72.3	1.1	52.
2.9	17.1	1194.3	875.0	20.8	12.2	260.9	18.8	18.6	3.0	306.8	335.4	10.3	57.9	2.2	65.
3.9	19.5	1445.1	850.0	19.8	10.5	255.2	19.4	18.8	5.0	308.2	334.6	9.4	54.8	3.3	70.
4.8	21.8	1701.7	825.0	17.7	8.9	246.7	19.0	17.4	7.5	308.5	333.1	8.7	56.2	4.3	70.
5.8	24.3	1964.4	800.0	16.1	5.9	237.9	18.1	15.3	9.6	309.3	330.1	7.3	50.9	5.4	69.
6.7	26.7	2233.8	775.0	14.4	3.0	230.4	15.5	11.9	9.9	310.1	327.9	6.2	46.4	6.3	67.
7.8	29.3	2509.9	750.0	12.0	3.9	225.2	16.8	11.9	11.8	310.5	329.0	6.8	57.6	7.3	64.
8.7	32.0	2792.7	725.0	9.3	2.4	223.7	16.8	11.6	12.2	310.5	328.7	6.3	61.9	8.2	62.
9.8	34.7	3083.0	700.0	6.7	1.4	220.0	16.0	10.3	12.2	310.8	328.3	6.1	68.8	9.3	59.
10.9	37.2	3380.5	675.0	4.0	-1.5	209.9	13.8	6.9	12.0	310.8	325.8	5.1	67.8	10.1	57.
11.9	40.1	3687.5	650.0	3.8	-10.1	200.5	13.7	4.8	12.8	313.6	322.0	2.7	35.4	10.9	55.
13.1	42.8	4005.0	625.0	1.6	-13.9	201.8	14.4	5.3	13.4	314.6	321.1	2.1	30.4	11.6	52.
14.3	45.9	4331.9	600.0	-1.5	-14.8	203.3	14.8	5.8	13.6	314.6	321.0	2.0	35.5	12.6	50.
15.6	48.8	4669.0	575.0	-4.8	-15.8	205.3	14.5	6.2	13.1	314.6	320.7	1.9	41.6	13.6	48.
17.1	51.8	5016.7	550.0	-7.6	-21.2	212.6	16.3	8.8	13.7	315.2	319.4	1.3	33.2	14.9	46.
18.7	54.9	5379.5	525.0	-7.0	-30.1	214.1	15.9	8.9	12.2	320.0	322.0	0.6	13.8	16.6	45.
20.1	58.0	5757.6	500.0	-10.2	-32.5	214.7	14.8	8.4	12.1	320.6	322.4	0.5	14.0	17.7	44.
21.5	61.4	6150.1	475.0	-13.8	-35.2	212.0	17.3	9.2	14.6	320.9	322.3	0.4	14.4	19.1	43.
22.9	65.0	6557.8	450.0	-17.7	-38.2	211.0	17.0	8.8	14.6	320.9	322.0	0.3	14.7	20.5	42.
24.3	68.3	6983.6	425.0	-20.3	-31.1	232.3	20.4	16.1	12.5	323.0	325.3	0.7	37.1	22.1	42.
25.7	71.9	7429.3	400.0	-23.1	-42.5	250.1	25.7	24.2	8.8	325.0	325.8	0.2	15.4	23.9	44.
27.3	75.8	7898.7	375.0	-26.8	-46.4	255.5	28.1	27.2	7.0	326.1	326.7	0.2	13.5	26.2	47.
28.8	79.8	8392.7	350.0	-30.5	-47.1	253.1	34.6	33.1	10.1	327.6	328.2	0.2	17.7	28.8	49.
30.5	83.8	8915.3	325.0	-34.6	-50.4	252.7	39.6	37.8	11.8	328.9	329.3	0.1	18.1	32.2	52.
32.5	88.2	9469.3	300.0	-39.3	99.9	250.6	42.0	39.6	13.9	329.9	999.9	99.9	999.9	36.8	55.
35.3	93.0	10060.4	275.0	-43.3	99.9	249.8	41.3	38.8	14.3	332.6	999.9	99.9	999.9	44.0	57.
38.2	97.8	10694.0	250.0	-48.6	99.9	244.1	43.2	38.9	18.9	333.8	999.9	99.9	999.9	50.6	59.
41.0	103.0	11379.4	225.0	-52.4	99.9	250.2	45.9	43.2	15.5	338.2	999.9	99.9	999.9	57.7	59.
43.8	108.7	12134.6	200.0	-56.7	99.9	253.1	50.3*	48.1	14.7	343.0	999.9	99.9	999.9	65.4	61.
46.8	114.7	12773.0	175.0	-59.9	99.9	252.0	33.9*	32.2	10.5	351.1	999.9	99.9	999.9	73.2	62.
50.3	121.3	13932.8	150.0	-62.3	99.9	254.1	39.1*	37.6	10.7	362.8	999.9	99.9	999.9	81.4	63.
54.4	128.7	15065.2	125.0	-61.0	99.9	267.8	41.1*	41.0	1.6	384.5	999.9	99.9	999.9	92.3	65.
59.2	136.7	16447.2	100.0	-62.7	99.9	267.0	23.7*	23.7	1.2	406.6	999.9	99.9	999.9	99.5	67.
64.8	145.0	18189.5	75.0	-67.1	99.9	247.6	14.8*	13.7	5.6	432.2	999.9	99.9	999.9	104.2	68.
72.7	154.0	20689.7	50.0	-59.8	99.9	105.1	6.7*	-6.4	1.7	502.5	999.9	99.9	999.9	103.7	68.
85.6	164.0	25131.0	25.0	-51.5	99.9	266.3	0.1	0.1	0.0	636.7	999.9	99.9	999.9	102.2	69.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 261
DEL RIO, TEX

6 MAY 1975
1415 GMT

156 13. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	8.8	314.0	968.2	24.6	21.9	110.7	2.1	-2.0	0.7	302.9	349.1	17.4	85.0	0.0	30
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.8	10.4	481.1	950.0	23.3	21.8	959.9	99.9	99.9	99.9	303.2	351.0	17.6	90.9	99.9	99.9
1.8	12.5	714.5	925.0	22.6	20.4	224.3	7.0	4.9	5.0	304.6	349.2	16.6	87.8	0.4	13
2.6	14.7	953.6	900.0	21.3	16.2	258.1	6.6	6.5	1.4	305.3	340.7	13.0	72.6	0.7	36
3.5	16.8	1198.0	875.0	21.1	7.2	291.5	8.0	7.4	-2.9	306.7	327.5	7.4	40.8	0.9	57
4.6	19.2	1448.1	850.0	19.5	1.8	296.4	12.0	10.8	-5.3	307.3	322.1	5.2	30.9	1.3	80
5.6	21.3	1794.2	825.0	18.2	-3.5	300.1	12.4	10.7	-6.2	308.3	318.9	3.6	22.7	2.0	95
6.7	23.8	1966.2	800.0	16.0	-5.2	300.1	10.9	9.4	-5.4	308.6	318.2	3.2	22.8	2.7	102
7.7	26.1	2234.4	775.0	13.6	-5.9	290.7	9.7	9.1	-3.4	308.8	318.3	3.2	25.2	3.3	104
8.9	28.5	2509.5	750.0	11.7	-7.5	276.4	6.8	6.7	-0.8	309.6	318.3	2.9	25.3	3.9	115
9.9	31.1	2791.8	725.0	9.9	-9.0	234.9	6.4	5.3	3.7	310.7	318.8	2.7	25.3	4.3	123
11.2	33.7	3082.5	700.0	8.2	-11.2	219.0	10.0	6.3	7.8	311.9	319.1	2.3	24.0	4.5	96
12.2	36.1	3381.4	675.0	5.9	-10.8	209.6	12.1	6.0	10.5	312.6	320.2	2.5	28.9	5.0	89
13.5	38.9	3699.0	650.0	3.5	-11.9	197.9	12.8	3.9	12.2	313.2	320.6	2.4	31.3	5.4	80
14.7	41.4	4005.8	625.0	0.9	-12.9	208.9	15.5	7.5	13.6	313.8	320.9	2.3	34.8	6.0	71
16.0	44.3	4332.3	600.0	-1.8	-13.9	214.4	19.1	10.8	15.8	314.3	321.1	2.2	38.8	7.1	64
17.2	47.3	4669.7	575.0	-3.7	-21.1	218.0	18.3	11.3	14.4	315.8	319.8	1.2	24.4	8.4	60
18.5	50.3	5019.6	550.0	-5.4	-28.0	220.1	17.6	11.4	13.5	317.7	320.1	0.7	14.9	9.7	57
19.9	53.1	5383.1	525.0	-7.0	-30.7	218.2	19.2	11.9	15.1	320.0	321.9	0.6	13.0	11.2	55
21.3	56.1	5761.6	500.0	-10.1	-33.0	225.3	18.8	13.4	13.2	320.8	322.4	0.5	13.3	12.7	53
23.0	59.4	6154.7	475.0	-12.8	-35.0	239.7	20.2	17.4	10.2	322.1	323.5	0.4	13.5	14.7	52
24.6	62.9	6564.7	450.0	-15.6	-37.0	245.5	23.8	21.6	9.9	323.6	324.9	0.3	13.8	16.8	54
26.2	66.1	6994.0	425.0	-18.2	-39.0	246.1	25.2	23.0	10.2	325.6	326.7	0.3	14.1	19.1	56
27.8	69.9	7444.1	400.0	-21.4	-41.4	245.8	28.2	25.7	11.5	327.2	328.1	0.2	14.4	21.7	57
29.4	73.3	7916.5	375.0	-25.2	-43.9	245.1	30.9	28.0	13.0	328.2	328.9	0.2	15.6	24.4	58
31.1	77.3	8414.0	350.0	-28.9	-41.7	246.8	34.7	31.9	13.7	329.7	330.7	0.3	27.8	27.8	59
33.0	81.3	8939.2	325.0	-33.7	-40.8	246.9	37.5	34.5	14.7	330.1	331.1	0.3	48.8	31.9	60
35.0	85.6	9455.7	300.0	-38.2	-42.6	243.8	42.1	37.8	18.5	331.5	332.5	0.3	62.8	36.5	61
37.0	90.0	10087.8	275.0	-43.5	99.9	242.0	42.3	37.3	19.9	332.2	999.9	99.9	99.9	41.7	51
39.4	94.8	10721.6	250.0	-48.8	99.9	240.9	46.1	40.3	22.4	333.6	999.9	99.9	99.9	47.9	61
41.9	99.8	11406.7	225.0	-52.7	99.9	249.1	48.1	45.0	17.2	337.8	999.9	99.9	99.9	54.1	62
44.7	105.0	12159.2	200.0	-57.2	99.9	252.0	46.6	44.4	14.4	342.2	999.9	99.9	99.9	62.1	63
48.0	110.8	12999.7	175.0	-58.2	99.9	249.4	39.8*	37.3	14.0	353.9	999.9	99.9	99.9	70.8	64
51.2	117.3	13969.6	150.0	-59.1	99.9	251.8	40.0*	38.0	12.5	368.2	999.9	99.9	99.9	78.5	65
55.5	124.7	15104.7	125.0	-62.2	99.9	269.2	21.5*	21.5	6.3	382.4	999.9	99.9	99.9	88.8	65
60.0	132.3	16462.4	100.0	-67.2	99.9	265.7	29.7*	29.7	2.2	397.9	999.9	99.9	99.9	97.0	67
65.3	140.7	18161.3	75.0	-75.2	99.9	228.5	16.6*	12.5	11.0	415.3	999.9	99.9	99.9	131.8	68
72.7	145.3	21643.8	50.0	-80.6	99.9	232.1	5.1	4.0	3.4	500.9	999.9	99.9	99.9	101.8	68
84.4	158.7	25006.0	25.0	-50.0	99.9	341.5	3.0	1.0	-2.9	641.3	999.9	99.9	99.9	101.6	69

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 265
MIDLAND, TEX

6 MAY 1975
1445 GMT

154 14. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SLC	PCT T DG K	E PCT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	12.1	873.0	910.9	16.6	-9.3	350.0	8.8	1.5	-8.7	297.9	303.9	2.1	16.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
0.3	13.1	975.0	900.0	15.0	-3.7	347.0	10.9	2.5	-10.7	297.4	306.5	3.2	27.2	0.4	173.
1.2	15.2	1212.4	875.0	12.7	-5.1	338.6	9.6	3.5	-9.0	297.4	306.0	3.0	28.5	0.8	169.
2.0	17.4	1455.2	850.0	12.8	-5.2	309.4	9.3	7.2	-5.9	300.0	308.8	3.1	28.1	1.3	161.
3.0	19.7	1706.4	825.0	13.4	-3.9	275.4	9.4	9.3	-0.9	303.2	313.3	3.5	29.6	1.7	146.
4.0	21.9	1964.2	800.0	11.4	-5.3	268.5	10.0	10.0	0.3	303.7	313.1	3.2	30.5	2.0	133.
4.9	24.4	2228.5	775.0	9.5	-6.4	251.8	9.2	8.8	2.9	304.4	313.4	3.1	31.9	2.4	123.
5.9	26.7	2499.6	750.0	7.8	-7.8	248.2	13.6	12.7	5.1	305.4	313.8	2.8	32.1	2.8	112.
7.0	29.2	2778.3	725.0	6.5	-8.1	245.0	16.6	15.1	7.0	306.9	315.5	2.9	34.5	3.6	101.
7.9	31.8	3065.2	700.0	4.3	-9.3	233.8	16.5	13.3	9.8	307.6	315.7	2.7	36.4	4.4	92.
9.0	34.6	3360.0	675.0	1.9	-10.4	228.1	17.1	12.7	11.4	308.1	315.9	2.6	39.5	5.2	84.
9.9	37.1	3663.1	650.0	-0.5	-11.3	223.6	17.4	12.0	12.6	308.7	316.2	2.5	43.7	6.0	79.
11.0	39.9	3976.6	625.0	-0.6	-17.7	222.7	20.2	13.7	14.9	312.0	316.8	1.5	25.9	6.9	73.
12.1	42.6	4301.4	600.0	-2.9	-19.7	221.4	22.9	15.2	17.2	312.9	317.1	1.3	25.9	8.3	67.
13.4	45.6	4637.2	575.0	-5.1	-22.3	217.8	21.5	13.2	17.0	314.1	317.7	1.1	24.3	9.9	63.
14.7	48.7	4964.7	550.0	-7.9	-24.7	217.7	19.6	12.0	15.5	314.8	317.9	0.9	24.4	11.3	59.
15.9	51.6	5344.7	525.0	-10.2	-27.5	227.0	20.4	14.9	13.9	316.2	318.7	0.8	22.6	12.7	57.
17.2	54.9	5718.4	500.0	-13.0	-29.9	231.8	21.0	16.5	13.0	317.2	319.3	0.6	22.7	14.3	57.
18.6	58.1	6137.5	475.0	-15.6	-32.1	231.5	22.0	17.2	13.7	318.7	320.5	0.5	22.6	16.0	56.
20.0	61.6	6513.7	450.0	-17.9	-34.0	225.9	25.5	18.3	17.7	320.8	322.4	0.5	22.7	18.1	55.
21.5	65.3	6938.3	425.0	-21.6	-37.1	223.6	27.3	18.9	19.8	321.3	322.6	0.4	22.8	20.5	54.
23.0	68.9	7382.0	400.0	-24.8	-39.9	231.3	28.7	22.4	17.9	322.7	323.6	0.3	23.0	22.8	53.
24.1	72.7	7848.4	375.0	-27.9	-42.4	242.0	30.0	26.5	14.1	324.7	325.5	0.2	23.2	24.8	53.
25.7	76.8	8340.2	350.0	-31.2	-45.2	242.1	43.4	38.3	20.3	326.7	327.4	0.2	23.3	28.3	55.
27.7	81.0	8861.4	325.0	-35.0	-48.5	236.3	45.7	38.1	25.3	328.4	329.0	0.1	23.5	33.8	55.
29.3	85.5	9415.1	300.0	-39.5	99.9	238.1	43.9	37.3	23.2	329.6	999.9	99.9	999.9	38.1	55.
31.2	90.3	10004.2	275.0	-44.3	99.9	241.0	45.0	39.3	21.8	331.1	999.9	99.9	999.9	43.2	56.
33.3	95.4	10637.6	250.0	-47.9	99.9	240.7	46.5	40.5	22.8	334.8	999.9	99.9	999.9	49.8	57.
35.6	100.8	11326.8	225.0	-52.1	99.9	244.1	44.7	40.2	19.6	338.7	999.9	99.9	999.9	55.2	57.
37.9	106.9	12081.3	200.0	-56.0	99.9	245.5	45.5*	41.4	18.9	344.1	999.9	99.9	999.9	61.1	58.
40.7	113.3	12929.8	175.0	-57.1	99.9	246.5	39.1*	35.9	15.6	355.7	999.9	99.9	999.9	68.5	59.
43.9	120.3	13899.4	150.0	-58.3	99.9	249.9	39.4*	37.0	13.5	369.7	999.9	99.9	999.9	75.6	60.
47.5	128.3	15044.8	125.0	-60.4	99.9	259.8	38.8*	38.2	6.9	385.7	999.9	99.9	999.9	84.7	61.
51.9	136.5	16423.1	100.0	-63.8	99.9	252.3	29.0*	27.6	8.8	404.4	999.9	99.9	999.9	92.6	62.
57.5	144.7	18176.1	75.0	-67.3	99.9	88.3	3.6*	-3.6	-0.1	431.8	999.9	99.9	999.9	97.3	63.
65.5	153.0	20679.2	50.0	-57.8	99.9	122.8	2.1	-1.7	1.1	507.2	999.9	99.9	999.9	97.7	63.
77.7	161.3	25148.0	25.0	-50.1	99.9	32.5	3.0	-1.6	-2.6	641.1	999.9	99.9	999.9	95.1	64.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 270
EL PASO, TEX

6 MAY 1975
1500 GMT

153 22. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	16.3	1193.0	878.6	11.0	-10.5	360.0	1.5	0.0	-1.5	295.1	300.8	2.0	21.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	16.6	1227.2	875.0	10.0	-9.2	999.9	99.9	99.9	99.9	294.5	300.8	2.2	25.0	99.9	99.9
1.0	19.1	1466.3	850.0	6.6	-8.7	999.9	99.9	99.9	99.9	293.4	300.0	2.3	32.4	99.9	99.9
1.8	21.4	1710.7	825.0	5.3	-10.6	999.9	99.9	99.9	99.9	294.5	300.4	2.1	30.4	99.9	99.9
2.6	23.8	1961.0	800.0	3.3	-12.1	999.9	99.9	99.9	99.9	294.9	300.4	1.9	31.4	99.9	99.9
3.5	26.2	2217.6	775.0	1.3	-13.2	999.9	99.9	99.9	99.9	295.4	300.6	1.8	32.7	99.9	99.9
4.1	28.7	2480.8	750.0	-0.2	-11.1	999.9	99.9	99.9	99.9	296.6	303.0	2.2	43.6	99.9	99.9
5.1	31.3	2751.9	725.0	-0.9	-7.3	999.9	99.9	99.9	99.9	298.9	307.7	3.1	61.7	99.9	99.9
6.1	34.0	3031.4	700.0	-2.1	-9.9	999.9	99.9	99.9	99.9	300.5	308.0	2.6	55.0	99.9	99.9
7.3	36.6	3319.3	675.0	-4.2	-12.5	999.9	99.9	99.9	99.9	301.3	307.7	2.2	52.3	99.9	99.9
8.4	39.4	3616.9	650.0	-4.6	-19.5	999.9	99.9	99.9	99.9	303.9	307.8	1.3	30.1	99.9	99.9
9.4	42.0	3924.9	625.0	-5.1	-25.8	250.1	29.1	27.4	9.9	306.6	309.0	0.7	17.9	8.3	71.
10.5	45.0	4245.0	600.0	-6.0	-26.5	255.0	26.9	26.0	7.0	309.2	311.6	0.7	17.9	10.0	71.
11.6	48.3	4577.3	575.0	-7.5	-27.7	255.4	25.9	25.0	6.5	311.2	313.5	0.7	18.0	11.8	72.
12.7	51.0	4921.9	550.0	-9.3	-29.1	254.6	27.9	26.9	7.4	313.1	315.2	0.6	18.1	13.5	72.
14.0	54.3	5280.1	525.0	-11.4	-30.8	254.6	27.2	26.3	7.2	314.7	316.6	0.6	18.3	15.7	73.
15.3	57.3	5652.5	500.0	-13.8	-32.7	252.3	27.0	25.7	8.2	316.2	317.8	0.5	18.4	17.8	73.
16.7	60.7	6040.6	475.0	-16.1	-34.6	243.9	28.0	25.2	12.3	318.0	319.5	0.4	18.6	20.2	72.
18.1	64.3	6444.9	450.0	-19.4	-37.2	239.0	26.1	22.4	13.5	318.8	320.1	0.3	18.8	22.3	71.
19.6	67.9	6867.0	425.0	-22.6	-39.8	239.5	27.0	23.3	13.7	319.9	320.9	0.3	19.0	24.8	70.
21.1	71.3	7309.2	400.0	-25.5	-42.1	239.2	30.7	26.4	15.7	321.8	322.6	0.2	19.2	27.3	69.
22.7	75.3	7773.7	375.0	-29.8	-45.7	235.9	30.8	25.5	17.3	322.1	322.7	0.2	19.5	30.2	68.
24.4	79.6	8261.4	350.0	-33.7	-48.9	235.6	30.6	26.4	15.5	323.3	323.7	0.1	19.7	33.3	67.
26.2	83.7	8776.4	325.0	-38.4	-52.8	235.5	31.7	26.2	18.0	323.7	324.0	0.1	20.1	36.5	66.
28.0	88.2	9321.4	300.0	-43.1	99.9	234.5	35.6	29.0	20.7	324.6	999.9	99.9	999.9	40.0	65.
29.9	93.0	9902.6	275.0	-47.1	99.9	236.8	35.1	29.3	19.2	327.1	999.9	99.9	999.9	43.9	64.
32.2	98.0	10529.1	250.0	-49.9	99.9	239.9	42.4	36.7	21.2	331.9	999.9	99.9	999.9	49.4	63.
34.6	103.3	11211.0	225.0	-54.2	99.9	242.0	48.1*	42.5	22.6	335.5	999.9	99.9	999.9	56.0	63.
37.4	109.3	11962.3	200.0	-55.2	99.9	239.1	45.7*	39.2	23.5	345.4	999.9	99.9	999.9	64.4	63.
40.5	115.5	12811.5	175.0	-57.5	99.9	237.4	41.9*	35.3	22.5	355.0	999.9	99.9	999.9	72.0	62.
44.0	122.5	13782.0	150.0	-57.4	99.9	242.2	43.7*	38.7	20.4	371.2	999.9	99.9	999.9	81.4	62.
48.1	130.3	14931.3	125.0	-58.4	99.9	250.0	37.0*	34.7	12.7	389.3	999.9	99.9	999.9	91.7	63.
52.9	138.3	16329.1	100.0	-60.3	99.9	252.5	18.4*	17.5	5.5	411.2	999.9	99.9	999.9	101.4	64.
59.0	147.3	18107.0	75.0	-66.3	99.9	254.2	6.0*	5.7	1.6	433.9	999.9	99.9	999.9	104.6	63.
68.8	156.3	20629.3	50.0	-57.4	99.9	270.0	4.2*	4.2	-0.0	508.3	999.9	99.9	999.9	104.0	63.
79.9	166.5	25114.7	25.0	-47.4	99.9	26.0	4.7	-2.1	-4.2	648.7	999.9	99.9	999.9	100.7	64.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 327
NASHVILLE, TENN

6 MAY 1975
1415 GMT

159 13. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.2	180.0	991.5	20.5	15.5	200.0	4.2	1.4	3.9	295.9	325.5	11.3	73.0	0.0	0.
09.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.6	7.5	324.8	975.0	18.5	14.5	999.9	99.9	99.9	99.9	295.2	323.4	10.7	77.6	999.9	999.
1.5	9.6	547.5	950.0	16.5	14.7	999.9	99.9	99.9	99.9	295.4	324.7	11.2	89.1	999.9	999.
2.2	11.3	775.4	925.0	16.8	16.5	213.9	9.3	5.2	7.7	298.2	332.2	12.9	97.9	0.9	17.
3.1	13.4	1009.8	900.0	16.4	15.6	209.1	9.8	4.8	8.5	300.0	333.3	12.5	95.2	1.3	23.
4.1	15.5	1249.8	875.0	15.2	10.1	199.6	9.3	3.1	8.7	300.8	325.1	9.0	71.8	1.9	23.
5.1	17.5	1495.1	850.0	13.4	8.6	197.9	7.4	2.3	7.0	301.3	323.9	8.3	72.5	2.4	22.
6.3	19.7	1745.1	825.0	12.0	6.4	240.0	4.0	3.5	2.0	302.2	322.6	7.4	69.0	2.8	23.
7.3	21.7	2004.1	800.0	11.9	-0.4	253.1	5.7	5.4	1.7	304.5	317.8	4.7	42.8	3.0	28.
8.4	24.0	2268.8	775.0	9.8	-1.7	254.1	5.7	5.5	1.6	304.9	317.4	4.4	44.4	3.3	31.
9.4	26.1	2540.4	750.0	7.4	-1.1	258.9	7.6	7.4	1.5	305.2	318.7	4.7	54.9	3.6	37.
10.6	28.5	2818.8	725.0	5.3	-2.1	259.8	8.4	8.3	1.5	305.8	318.9	4.5	58.9	4.0	42.
11.6	30.8	3104.7	700.0	3.3	-2.4	262.0	7.8	7.7	1.1	305.7	320.0	4.6	66.2	4.4	46.
12.8	33.3	3398.7	675.0	0.9	-2.8	263.5	9.2	9.2	1.0	307.3	320.7	4.6	76.0	4.9	50.
14.0	35.7	3701.4	650.0	-1.6	-2.7	267.2	10.8	10.8	0.5	307.8	321.8	4.8	92.4	5.5	55.
15.3	38.2	4012.4	625.0	-4.4	-6.0	270.8	12.7	12.7	-0.2	307.9	319.4	3.9	88.7	6.3	59.
16.4	40.7	4333.6	600.0	-5.7	-15.7	284.6	14.3	13.8	-3.6	309.8	315.7	1.9	46.2	7.0	63.
17.6	43.3	4665.7	575.0	-8.2	-19.4	303.9	16.6	13.8	-9.2	310.5	315.0	1.4	40.0	7.8	70.
18.9	46.2	5009.1	550.0	-11.3	-22.3	313.1	16.9	12.4	-11.6	310.8	314.5	1.2	39.6	8.5	78.
20.3	49.1	5364.3	525.0	-13.3	-29.3	311.8	15.3	11.4	-10.2	312.5	314.6	0.6	24.6	9.3	85.
21.8	52.0	5735.2	500.0	-14.0	-32.0	309.4	16.0	12.3	-10.1	316.0	317.7	0.5	20.0	10.3	90.
23.2	55.1	6123.9	475.0	-15.6	-30.7	310.1	15.9	12.2	-10.2	318.6	320.8	0.6	26.1	11.5	95.
24.7	58.0	6529.6	450.0	-18.3	-34.5	307.8	16.6	13.1	-10.2	320.3	321.8	0.5	22.5	12.6	98.
26.4	61.4	6953.8	425.0	-21.5	-37.1	307.4	17.6	14.0	-10.7	321.4	322.7	0.4	22.7	14.2	102.
28.1	65.0	7397.6	400.0	-25.0	-40.0	309.4	19.6	15.1	-12.4	322.5	323.6	0.3	22.9	15.9	105.
29.9	68.3	7864.2	375.0	-28.1	-42.7	306.3	21.6	17.4	-12.8	324.3	325.2	0.2	23.1	18.0	108.
32.0	72.0	8356.0	350.0	-31.8	-45.8	299.9	26.0	22.5	-13.0	325.8	326.5	0.2	23.3	20.7	110.
34.1	76.0	8876.5	325.0	-35.4	-49.1	294.6	25.7	23.4	-10.7	327.8	328.3	0.1	22.7	24.1	111.
35.4	80.3	9429.2	300.0	-39.6	99.9	290.8	30.7	28.7	-10.9	326.5	999.9	99.9	999.9	28.0	111.
38.7	84.6	10018.4	275.0	-44.8	99.9	289.8	32.3	30.4	-10.9	130.4	999.9	99.9	999.9	32.3	111.
41.1	89.2	10649.0	250.0	-49.7	99.9	282.4	36.5	35.7	-7.8	332.2	999.9	99.9	999.9	37.2	110.
44.1	94.4	11330.4	225.0	-54.9	99.9	282.7	40.7	39.7	-8.9	334.4	999.9	99.9	999.9	44.0	109.
47.0	99.8	12075.7	200.0	-59.3	99.9	288.8	39.2	37.1	-12.7	338.9	999.9	99.9	999.9	50.6	109.
50.1	105.7	12900.0	175.0	-65.3	99.9	288.0	31.7	30.2	-5.8	342.2	999.9	99.9	999.9	57.4	109.
53.5	112.3	13832.8	150.0	-66.4*	99.9	295.3	29.4	26.0	-12.6	355.7	999.9	99.9	999.9	64.7	108.
57.7	119.7	14945.1	125.0	-63.3*	99.9	305.5	19.1	15.5	-11.1	380.3	999.9	99.9	999.9	73.6	109.
62.6	128.3	16328.6	100.0	-59.7*	99.9	121.5	17.5*	-14.9	9.1	412.4	999.9	99.9	999.9	77.6	109.
69.1	138.0	18126.7	75.0	-62.9	99.9	269.1	16.9	16.9	0.3	441.1	999.9	99.9	999.9	83.1	109.
77.8	148.3	20640.5	50.0	-58.6	99.9	0.3	6.2	-0.0	-6.2	505.5	999.9	99.9	999.9	84.9	110.
91.6	159.0	25069.2	25.0	-49.5	99.9	153.4	2.2	-1.0	1.9	642.2	999.9	99.9	999.9	83.4	111.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 340
LITTLE ROCK, ARK

6 MAY 1975
1459 GMT

150 58. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.9	79.0	999.3	22.2	17.1	150.0	5.2	-2.6	4.5	297.1	329.7	12.4	73.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.7	8.1	292.7	975.0	20.3	15.7	140.3	7.4	-4.7	5.7	267.2	327.7	11.6	74.5	0.3	327.
1.4	10.4	516.8	950.0	18.6	15.3	159.2	11.2	-4.0	10.4	297.6	328.3	11.6	81.0	0.6	331.
2.0	12.6	745.9	925.0	17.9	16.0	155.7	10.3	-4.2	9.4	299.3	332.5	12.5	88.5	1.1	335.
2.8	15.1	980.9	900.0	17.2	14.8	190.4	15.0	2.7	14.8	300.9	332.6	11.9	85.4	1.6	336.
3.7	17.3	1222.0	875.0	16.7	13.0	197.7	18.9	5.8	16.0	302.6	332.0	10.8	78.6	2.5	356.
4.5	19.8	1469.1	850.0	15.7	8.9	177.3	12.6	-0.6	12.6	303.7	327.2	8.5	64.3	3.2	357.
5.3	22.1	1721.7	825.0	13.0	6.0	185.9	13.2	1.4	13.1	303.3	323.2	7.2	62.5	3.8	357.
6.3	24.7	1980.6	800.0	12.2	7.9	196.1	12.2	3.4	11.7	305.2	328.6	8.4	75.1	4.5	367.
7.1	27.0	2246.5	775.0	10.5	7.5	200.3	10.4	3.6	9.8	306.2	329.6	8.4	81.5	5.0	2.
7.9	29.8	2520.0	750.0	9.4	5.1	203.9	7.7	3.1	7.1	307.8	328.6	7.4	74.1	5.5	3.
8.8	32.4	2801.3	725.0	8.3	3.8	211.8	7.0	3.7	5.9	309.4	329.3	7.0	73.3	5.8	5.
9.8	35.2	3091.1	700.0	6.9	1.7	220.1	7.0	4.5	5.3	310.9	328.9	6.2	69.5	6.1	7.
10.7	37.9	3389.1	675.0	4.4	-0.1	231.8	6.6	5.2	4.1	311.3	327.7	5.7	72.8	6.5	9.
11.7	40.7	3695.4	650.0	1.7	-1.3	237.9	6.6	5.6	3.5	311.5	327.2	5.4	80.7	6.7	11.
12.6	43.6	4010.9	625.0	0.0	-8.5	237.2	7.1	6.0	3.9	312.9	322.0	3.2	52.5	7.0	13.
13.6	46.8	4336.5	600.0	-2.4	-11.0	244.0	7.5	6.7	3.3	313.6	322.0	2.7	51.5	7.3	16.
14.7	49.9	4672.4	575.0	-5.7	-14.0	249.6	8.1	7.6	2.8	313.6	320.5	2.2	51.7	7.6	19.
15.8	52.9	5019.1	550.0	-8.5	-16.3	255.5	7.9	7.7	2.0	314.2	320.3	1.9	53.2	8.0	22.
17.1	56.0	5378.7	525.0	-9.9	-34.6	273.4	6.3	6.3	-0.4	316.5	317.8	0.4	11.2	8.3	26.
18.2	59.4	5754.1	500.0	-11.7	-47.9	280.4	7.5	7.3	-1.4	318.7	319.1	0.1	3.1	8.4	28.
19.5	62.9	6145.0	475.0	-14.6	-48.7	272.6	10.4	10.4	-0.5	319.9	320.2	0.1	3.6	8.7	33.
20.9	66.3	6552.6	450.0	-17.0	-49.6	269.3	10.9	10.9	0.1	321.8	322.1	0.1	4.0	9.2	38.
22.2	70.1	6978.0	425.0	-21.0	-51.2	266.1	13.0	13.0	0.9	322.0	322.3	0.1	4.6	9.7	41.
23.7	73.7	7422.8	400.0	-24.7	-47.8	264.5	16.1	16.1	1.6	322.8	323.2	0.1	9.6	10.8	47.
25.4	77.8	7889.1	375.0	-28.0	-50.0	258.8	18.3	18.0	3.6	324.5	324.8	0.1	10.1	12.2	51.
27.3	81.8	8381.9	350.0	-30.5	-52.5	251.0	19.9	18.8	6.5	327.6	327.9	0.1	9.4	14.4	55.
29.4	86.0	8903.9	325.0	-35.0	-55.6	251.7	16.8	16.0	5.3	328.3	328.6	0.1	10.1	16.6	57.
31.1	90.6	9456.6	300.0	-40.0	99.9	253.9	17.9	17.2	5.0	329.0	999.9	99.9	999.9	18.2	58.
32.8	95.5	10045.2	275.0	-44.5	99.9	258.7	18.1	17.8	3.5	330.8	999.9	99.9	999.9	20.1	60.
35.0	100.4	10677.3	250.0	-48.9	99.9	260.2	20.3	20.0	3.5	333.4	999.9	99.9	999.9	22.5	62.
37.6	105.8	11361.3	225.0	-53.6	99.9	265.7	20.7	20.6	1.5	336.4	999.9	99.9	999.9	25.5	65.
40.2	111.5	12109.9	200.0	-58.8	99.9	263.2	18.0	17.8	2.1	339.6	999.9	99.9	999.9	28.2	67.
43.0	117.8	12941.1	175.0	-62.3	99.9	269.6	27.6	27.6	0.2	347.1	999.9	99.9	999.9	31.9	69.
46.4	125.0	13886.7	150.0	-64.6	99.9	264.0	33.9	33.7	3.5	358.8	999.9	99.9	999.9	38.0	72.
50.4	132.3	14967.8	125.0	-65.0	99.9	273.2	29.5	29.5	-1.7	377.3	999.9	99.9	999.9	45.4	75.
54.9	140.7	16369.9	100.0	-62.5	99.9	292.1	16.6	15.4	-6.3	406.9	999.9	99.9	999.9	51.6	78.
60.6	148.0	18151.1	75.0	-63.5	99.9	309.5	10.2	7.9	-6.5	439.9	999.9	99.9	999.9	55.9	81.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 349
MONETTE, MO

6 MAY 1975
1519 GMT

159 11. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	7.9	438.0	957.0	23.7	19.2	190.0	4.6	3.8	4.5	302.6	342.3	14.8	76.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.2	8.4	572.4	950.0	22.9	18.0	211.3	13.2	6.8	11.3	302.3	339.3	13.8	73.8	0.4	25.
1.0	10.3	734.4	925.0	20.4	16.4	213.3	12.7	7.0	10.6	301.9	336.3	12.8	77.9	0.8	26.
1.9	12.3	971.1	900.0	18.9	15.4	219.2	11.6	7.3	9.0	302.7	336.0	12.4	80.2	1.5	32.
2.8	14.4	1213.3	875.0	17.4	14.1	221.1	12.1	7.9	9.1	303.5	335.1	11.7	80.8	2.0	35.
3.7	16.3	1461.0	850.0	15.8	13.6	214.1	8.9	5.0	7.4	304.2	335.9	11.6	86.9	2.7	36.
4.7	18.5	1714.4	825.0	13.7	12.0	201.2	8.3	3.0	7.7	304.6	334.0	10.8	89.3	3.1	34.
5.7	20.6	1974.0	800.0	12.5	10.2	183.7	6.4	0.4	6.4	305.8	332.9	9.8	85.6	3.6	32.
6.9	22.9	2240.4	775.0	11.0	7.6	190.4	4.7	0.9	4.6	306.8	330.5	8.5	79.5	3.9	29.
9.1	25.1	2514.0	750.0	9.7	4.7	154.6	4.5	1.1	4.3	308.1	328.5	7.2	71.1	4.2	28.
9.0	27.3	2765.7	725.0	9.2	-1.5	204.1	4.7	1.9	4.3	310.1	324.0	4.7	47.1	4.5	27.
10.1	29.5	3085.4	700.0	6.9	-5.4	216.3	4.8	2.9	3.9	310.5	321.4	3.6	41.0	4.8	27.
11.2	32.2	3383.1	675.0	4.6	-8.2	243.1	5.9	5.3	2.7	311.2	320.4	3.1	38.8	5.1	28.
12.4	34.8	3689.4	650.0	2.2	-15.0	242.5	7.3	6.5	3.4	311.7	317.4	1.8	26.5	5.4	32.
13.5	37.2	4004.7	625.0	-0.4	-17.6	234.5	9.4	7.6	5.4	312.2	317.0	1.5	25.7	6.0	34.
14.7	39.9	4329.5	600.0	-2.8	-19.1	232.2	11.1	8.8	6.8	313.0	317.4	1.4	27.1	6.7	36.
16.0	42.4	4665.3	575.0	-5.4	-21.1	225.4	12.3	8.8	8.7	313.8	317.8	1.2	27.6	7.5	38.
17.2	45.3	5012.3	550.0	-7.8	-25.0	229.8	13.3	10.2	8.6	315.0	318.0	0.9	23.6	8.5	38.
18.5	48.1	5373.0	525.0	-9.3	-26.3	235.7	15.1	12.5	8.5	317.2	320.1	0.8	23.6	9.6	40.
19.9	51.0	5748.1	500.0	-11.5	-28.1	238.1	16.1	13.6	8.5	319.0	321.6	0.7	23.7	10.8	42.
21.4	54.1	6139.4	475.0	-14.6	-30.7	242.3	15.9	14.1	7.4	319.9	322.9	0.6	23.9	12.1	44.
22.9	57.1	6546.5	450.0	-17.4	-33.0	240.4	17.0	14.8	8.4	321.4	323.2	0.5	24.0	13.6	46.
24.4	60.6	6972.1	425.0	-20.6	-35.8	240.7	16.8	14.6	8.2	322.5	324.0	0.4	24.1	15.1	48.
26.0	64.0	7417.6	400.0	-23.8	-38.5	241.8	16.8	14.8	7.9	324.0	325.2	0.3	24.3	16.7	49.
27.8	67.5	7885.6	375.0	-27.5	-41.6	237.9	17.2	14.5	9.1	325.2	326.1	0.3	24.4	18.5	50.
29.7	71.2	8379.0	350.0	-30.8	-44.4	232.2	17.1	13.5	10.5	327.2	328.0	0.2	24.6	20.4	51.
31.4	75.2	8901.1	325.0	-34.7	-47.8	229.2	15.3	11.6	10.0	328.7	329.3	0.2	24.8	22.1	51.
33.3	79.5	9454.8	300.0	-39.5	-51.9	229.9	16.3	12.4	10.5	329.8	329.9	99.9	999.9	23.9	50.
35.4	83.8	10043.4	275.0	-44.4	-56.9	231.6	18.2	14.3	11.3	330.9	329.9	99.9	999.9	26.0	51.
37.7	88.6	10675.0	250.0	-49.4	-61.9	240.2	19.1	16.5	9.5	332.7	329.9	99.9	999.9	28.5	51.
40.1	93.8	11358.3	225.0	-53.9	-66.9	254.0	18.7	18.0	5.1	336.0	329.9	99.9	999.9	31.2	52.
42.9	99.3	12106.2	200.0	-58.6	-71.9	250.2	19.1	18.0	6.5	340.1	329.9	99.9	999.9	34.3	54.
45.9	105.5	12939.7	175.0	-61.3	-74.9	253.6	17.8	17.1	5.0	348.7	329.9	99.9	999.9	37.3	56.
49.1	112.3	13890.9	150.0	-62.9	-76.9	257.3	24.1	23.5	5.3	361.7	329.9	99.9	999.9	40.5	57.
52.7	120.0	15011.0	125.0	-62.0	-76.0	273.2	15.9	15.9	-0.9	382.8	329.9	99.9	999.9	44.8	60.
57.2	129.0	16414.3	100.0	-60.0	-74.0	279.6	11.2	11.0	-1.9	411.6	329.9	99.9	999.9	47.6	63.
63.1	139.0	19194.4	75.0	-63.1	-76.9	338.8	5.8	2.1	-5.4	440.6	329.9	99.9	999.9	49.9	66.
70.8	149.0	20731.6	50.0	-59.4	-74.9	80.7	1.3	-1.3	-0.2	503.4	329.9	99.9	999.9	49.1	66.
82.5	159.5	25191.1	25.0	-50.1	-74.9	90.8	0.9	-0.9	0.0	640.8	329.9	99.9	999.9	48.2	68.

* BY SPFC MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 353
OKLAHOMA CITY, OKLA

6 MAY 1975
1500 GMT

156 14. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.2	392.0	959.0	21.1	18.9	180.0	6.2	0.0	6.2	259.7	338.0	14.5	87.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.3	9.9	474.1	950.0	21.5	20.1	238.9	6.1	5.3	3.2	301.1	343.1	15.9	92.2	0.6	5.
1.1	12.0	705.5	925.0	19.0	17.8	247.4	5.8	5.3	2.2	300.7	337.9	14.0	92.3	0.8	19.
2.0	14.3	541.5	900.0	17.8	16.7	221.6	10.2	6.8	7.6	301.6	337.5	13.4	93.2	1.2	29.
3.0	16.5	1182.3	875.0	15.5	14.0	233.1	9.7	7.8	5.9	301.4	332.6	11.6	91.1	1.8	34.
4.0	18.9	1428.7	850.0	14.7	11.6	233.3	10.9	8.8	6.5	302.9	337.6	10.2	82.0	2.3	40.
4.9	21.1	1681.0	825.0	12.5	11.4	215.5	11.1	6.5	9.1	303.2	331.4	10.4	93.1	3.0	41.
6.0	23.6	1939.5	800.0	12.5	6.8	223.0	13.1	8.9	9.5	305.6	327.4	7.8	69.0	3.7	43.
7.0	25.9	2206.7	775.0	13.2	0.3	212.6	14.9	8.0	12.6	308.7	323.4	5.1	41.1	4.6	40.
8.1	28.5	2481.7	750.0	11.0	-1.1	216.1	14.1	8.3	11.4	309.1	322.8	4.7	42.9	5.5	39.
9.2	31.2	2763.5	725.0	9.4	-5.1	217.4	16.1	9.8	12.8	310.3	321.0	3.6	35.4	6.5	39.
10.3	33.9	3053.7	700.0	7.2	-2.6	212.5	18.6	10.0	15.7	311.1	324.4	4.5	49.5	7.6	38.
11.4	36.4	3351.7	675.0	4.6	-5.0	211.7	19.0	10.0	16.2	311.2	322.9	3.9	49.9	8.9	37.
12.5	39.3	3657.8	650.0	1.9	-11.5	210.7	20.1	10.3	17.3	311.5	318.9	2.4	36.0	17.2	37.
13.7	42.0	3972.6	625.0	-1.0	-14.2	205.3	18.3	7.8	16.5	311.5	317.9	2.0	35.8	11.6	36.
15.0	45.0	4296.5	600.0	-4.2	-16.3	203.0	18.4	7.2	17.0	311.5	317.0	1.8	38.0	12.9	34.
16.3	48.0	4630.8	575.0	-6.5	-16.8	213.3	21.6	11.9	18.1	312.6	318.2	1.8	43.5	14.5	34.
17.7	50.9	4976.5	550.0	-9.6	-16.7	219.7	23.2	14.8	17.8	312.9	318.8	1.9	56.0	16.4	34.
19.1	54.1	5333.9	525.0	-12.5	-20.5	221.3	24.1	15.9	18.1	313.5	318.0	1.4	51.4	18.3	35.
20.5	57.1	5706.6	500.0	-12.5	-34.6	208.1	25.6	12.1	22.6	317.8	319.2	0.4	13.8	20.4	35.
21.8	60.6	6056.8	475.0	-14.9	-36.4	203.4	22.7	9.0	20.8	319.5	320.8	0.4	14.0	22.4	34.
23.2	64.2	6502.9	450.0	-18.6	-36.0	209.0	24.8	12.0	21.7	319.9	321.2	0.4	19.7	24.2	33.
24.8	67.7	6926.5	425.0	-21.9	-40.1	218.2	23.0	14.2	18.1	320.8	321.8	0.3	17.3	26.7	33.
26.5	71.3	7369.3	400.0	-25.8	-41.7	215.4	22.7	13.2	18.5	321.4	322.3	0.2	20.8	29.0	34.
28.1	75.3	7833.7	375.0	-29.2	-45.9	216.7	25.4	15.2	20.4	322.9	323.5	0.2	17.9	31.1	34.
29.8	79.5	8323.1	350.0	-32.9	-49.6	221.6	25.1	16.6	18.8	324.3	324.8	0.1	16.8	33.7	34.
31.8	83.5	8841.1	325.0	-36.2	-52.9	239.9	20.4	17.7	10.2	326.7	327.0	0.1	15.7	36.4	35.
33.9	88.0	9390.6	300.0	-40.8	99.9	240.9	34.6	30.3	16.8	327.9	999.9	99.9	999.9	39.2	37.
36.0	92.8	9977.0	275.0	-45.5	99.9	241.8	36.8	32.5	17.4	329.4	999.9	99.9	999.9	43.6	40.
38.3	97.8	10606.0	250.0	-50.3	99.9	237.2	38.0	31.9	20.6	331.2	999.9	99.9	999.9	48.7	42.
40.8	103.0	11286.8	225.0	-54.3	99.9	239.5	38.2	32.9	19.3	335.3	999.9	99.9	999.9	53.9	44.
43.4	109.8	12033.4	200.0	-58.5	99.9	242.4	26.0	23.1	12.1	340.1	999.9	99.9	999.9	59.6	45.
46.3	114.8	12864.6	175.0	-62.3	99.9	239.7	41.6	35.9	21.0	347.1	999.9	95.9	999.9	65.9	46.
49.5	121.5	13824.8	150.0	-59.5	99.9	246.3	33.5	31.1	12.4	367.7	999.9	99.9	999.9	71.9	48.
53.2	128.7	14972.7	125.0	-58.6	99.9	249.6	21.5	20.2	7.5	388.8	999.9	99.9	999.9	77.6	50.
57.7	136.3	16372.0	100.0	-59.9	99.9	250.6	13.5	12.8	4.5	412.1	999.9	99.9	999.9	81.4	51.
63.4	144.0	18165.1	75.0	-62.8	99.9	257.9	11.2	10.9	2.3	441.3	999.9	99.9	999.9	83.8	51.
71.1	152.0	20688.8	50.0	-58.3	99.9	41.0	5.4	-3.5	-4.0	566.1	999.9	99.9	999.9	82.6	52.
82.9	160.3	25133.6	25.0	-49.3	99.9	47.7	1.7	-1.3	-1.2	643.5	999.9	99.9	999.9	81.2	52.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 363
AMARILLO, TEX

6 MAY 1975
1415 GMT

154 15. 0

TIME MIN	CNCT?	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	13.5	1095.0	882.4	12.2	-11.4	290.0	12.8	12.0	-4.4	296.0	301.3	1.8	18.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	14.1	1165.5	875.0	11.6	-6.0	271.2	25.1	25.1	-0.5	296.3	304.2	2.8	28.5	0.4	120.
1.0	16.0	1406.2	850.0	8.9	-8.8	274.6	18.8	18.7	-1.5	295.7	302.4	2.3	27.7	1.1	101.
1.9	18.2	1652.5	825.0	7.5	-11.6	272.4	21.0	21.0	-0.9	296.8	302.4	1.9	24.3	2.0	100.
2.7	20.4	1905.4	800.0	6.5	-12.4	256.9	22.1	21.5	5.0	298.3	303.7	1.8	24.3	3.1	95.
3.6	22.5	2165.2	775.0	5.2	-12.4	249.2	27.8	26.0	9.9	299.7	305.3	1.9	26.6	4.3	88.
4.4	24.9	2432.0	750.0	3.3	-12.0	243.3	28.8	25.8	13.0	300.4	306.4	2.0	31.3	5.7	82.
5.4	27.0	2705.6	725.0	1.2	-15.9	245.9	30.7	28.0	12.6	300.9	305.5	1.5	26.7	7.4	78.
6.3	29.4	2987.9	700.0	1.3	-18.7	244.0	34.3	30.8	15.0	304.0	307.9	1.2	20.9	9.0	76.
7.1	31.9	3279.7	675.0	-0.3	-20.0	239.1	32.5	27.9	16.7	305.4	309.0	1.2	21.0	10.7	74.
7.9	34.4	3580.3	650.0	-2.2	-21.5	231.4	30.9	24.2	19.3	306.6	309.9	1.1	21.1	12.2	71.
8.8	36.8	3892.5	625.0	-1.7	-20.0	220.9	31.3	20.5	23.7	310.7	314.6	1.2	23.2	13.8	68.
9.9	39.4	4216.1	600.0	-3.8	-20.9	214.1	33.2	18.6	27.5	311.8	315.6	1.2	25.2	15.4	65.
10.9	42.0	4550.4	575.0	-6.3	-22.9	211.8	33.7	17.7	28.6	312.7	316.1	1.0	25.3	17.3	61.
12.0	44.8	4897.0	550.0	-8.5	-25.0	213.0	31.6	17.2	26.5	314.1	317.0	0.9	24.9	19.2	57.
13.2	47.6	5256.4	525.0	-10.6	-26.8	218.9	29.5	18.5	22.9	315.7	318.4	0.8	25.0	21.3	55.
14.5	50.6	5629.7	500.0	-13.4	-30.0	224.4	26.1	18.3	18.7	316.7	318.8	0.6	23.0	23.3	54.
15.8	53.5	6018.1	475.0	-15.8	-32.1	227.0	33.5	24.5	22.8	318.4	320.3	0.5	23.1	25.6	54.
17.3	56.5	6424.2	450.0	-17.7	-33.7	225.4	29.8	21.2	20.9	321.0	322.7	0.5	23.2	28.5	53.
18.5	59.9	6849.5	425.0	-20.7	-35.8	228.4	30.6	22.9	20.3	322.4	323.9	0.4	24.4	30.9	52.
19.8	63.3	7294.3	400.0	-24.6	-39.0	229.3	26.0	19.7	16.9	322.9	324.1	0.3	24.8	32.7	52.
21.0	66.6	7761.0	375.0	-28.1	-41.9	230.4	28.5	22.0	18.2	324.4	325.3	0.2	24.9	34.9	52.
22.3	70.3	8251.6	350.0	-32.7	-45.0	233.8	27.7	22.4	16.4	324.6	325.3	0.2	27.6	37.1	52.
23.9	74.0	8768.4	325.0	-37.2	-49.0	212.8	32.8	26.1	15.8	325.3	325.8	0.1	27.8	39.8	52.
25.4	78.2	9316.9	300.0	-41.4	99.9	232.1	33.5	26.5	20.6	327.0	999.9	99.9	999.9	42.7	52.
27.2	82.4	9900.7	275.0	-46.5	99.9	233.6	28.9	23.3	17.1	327.9	999.9	99.9	999.9	46.1	52.
28.9	87.0	10526.3	250.0	-51.4	99.9	234.5	28.5	23.2	16.5	329.7	999.9	99.9	999.9	48.8	52.
30.7	92.1	11203.1	225.0	-56.0	99.9	212.4	32.1	25.4	15.6	332.7	999.9	99.9	999.9	52.3	52.
32.7	97.4	11946.4	200.0	-58.8	99.9	238.2	41.1	35.0	21.6	339.7	999.9	99.9	999.9	56.3	53.
35.0	103.3	12784.7	175.0	-57.8	99.9	240.3	35.3	30.7	17.5	354.6	999.9	99.9	999.9	61.9	53.
37.6	110.0	13762.6	150.0	-55.3	99.9	241.6	33.3	29.3	15.8	374.8	999.9	99.9	999.9	67.6	54.
40.6	117.3	14924.4	125.0	-56.0	99.9	240.5	26.3	22.9	13.0	393.6	999.9	99.9	999.9	70.8	54.
43.8	126.0	16331.0	100.0	-58.2	99.9	286.9	7.0	6.7	-2.0	415.3	999.9	99.9	999.9	76.1	55.
48.1	136.5	18124.9	75.0	-62.8	99.9	242.9	11.9	10.6	5.4	441.3	999.9	99.9	999.9	77.2	55.
53.8	147.5	20643.2	50.0	-58.4	99.9	226.1	9.8	7.1	6.8	505.8	999.9	99.9	999.9	83.4	55.
63.1	160.5	25068.0	25.0	-51.0	99.9	288.5	4.1	3.9	-1.3	638.3	999.9	99.9	999.9	77.6	56.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 365
ALBUQUERQUE, N MEX

6 MAY 1975
1415 GMT

144 10. 0

TIME MIN	CATCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MK RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	20.2	1619.0	832.4	3.9	-6.1	230.0	5.2	4.0	3.3	292.3	300.5	2.9	48.0	0.3	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.3	23.8	1691.4	825.0	2.0	-8.5	247.9	5.0	5.2	2.1	291.0	297.9	2.4	45.4	0.1	36.
1.2	23.2	1938.2	800.0	-0.8	-10.5	262.7	7.0	6.9	0.9	290.5	296.6	2.1	47.8	0.4	60.
1.9	25.5	2191.1	775.0	-2.5	-12.5	277.9	10.0	9.9	-1.4	291.3	296.7	1.9	46.0	0.8	76.
2.7	27.9	2450.5	750.0	-4.1	-16.0	288.8	12.4	11.8	-4.0	292.3	296.6	1.5	38.9	1.3	88.
3.6	30.4	2716.8	725.0	-6.5	-18.0	297.8	12.1	10.7	-5.6	292.5	296.3	1.3	39.4	1.9	97.
4.4	33.3	2989.9	700.0	-8.5	-20.9	298.3	14.8	13.1	-7.0	293.2	296.3	1.0	35.7	2.5	102.
5.4	35.5	3270.9	675.0	-10.7	-23.2	297.5	14.9	13.2	-6.9	293.8	296.4	0.9	34.7	3.4	116.
6.4	38.2	3560.0	650.0	-12.8	-26.1	296.8	14.1	12.6	-6.4	294.5	296.7	0.7	31.6	4.3	129.
7.6	40.8	3858.3	625.0	-14.6	-29.5	288.8	14.9	14.1	-4.8	295.8	297.5	0.5	26.8	5.3	110.
8.8	43.6	4166.9	600.0	-15.4	-32.7	268.4	18.3	18.3	0.5	298.3	299.6	0.4	21.1	6.4	108.
10.3	46.5	4488.9	575.0	-15.1	-32.4	250.9	23.7	22.4	7.7	302.3	303.7	0.4	21.0	8.1	101.
11.8	46.5	4924.7	550.0	-16.5	-33.5	252.4	30.0	28.6	9.0	304.5	305.9	0.4	21.1	10.3	94.
13.0	52.4	5174.5	525.0	-16.1	-34.6	252.9	33.6	32.1	9.9	309.1	310.4	0.4	18.5	12.4	90.
14.2	55.4	5541.1	500.0	-17.4	-35.6	252.0	37.2	35.4	11.5	311.8	313.1	0.4	18.6	14.9	88.
15.8	58.5	5923.8	475.0	-19.5	-37.3	247.8	40.2	37.2	15.2	313.6	315.0	0.3	18.8	18.6	84.
17.6	61.9	6324.3	450.0	-21.3	-38.7	246.7	42.6	39.1	16.9	316.5	317.5	0.3	19.0	22.8	81.
19.1	65.1	6745.1	425.0	-22.5	-39.6	246.1	42.0	38.5	17.0	320.2	321.2	0.3	19.1	26.4	79.
20.5	68.6	7188.1	400.0	-24.9	-41.6	244.1	44.9*	40.4	19.6	322.6	323.5	0.2	19.3	30.2	77.
22.1	72.1	7654.1	375.0	-28.2	-43.4	243.0	46.5*	41.4	21.1	324.2	325.0	0.2	21.5	34.4	75.
24.0	76.0	8144.3	350.0	-32.2	-46.8	242.6	53.9*	47.9	24.8	325.2	325.8	0.2	21.8	39.9	73.
25.7	80.1	8662.9	325.0	-36.3	-50.2	242.2	48.5*	42.9	22.6	326.5	326.9	0.1	22.1	45.0	72.
27.4	84.2	9212.9	300.0	-40.7	99.9	241.6	49.3*	43.3	23.4	328.1	999.9	99.9	999.9	49.9	71.
29.7	88.5	9800.5	275.0	-44.8	99.9	237.9	40.4*	34.2	21.4	330.4	999.9	99.9	999.9	55.7	70.
31.8	93.2	10430.8	250.0	-49.5	99.9	240.0	49.0*	42.5	24.5	332.5	999.9	99.9	999.9	61.7	69.
35.0	98.2	11118.1	225.0	-50.6	99.9	242.5	38.4*	34.1	17.7	340.9	999.9	99.9	999.9	69.2	68.
37.2	103.4	11884.0	200.0	-52.3	99.9	240.8	29.5*	25.8	14.4	350.0	999.9	99.9	999.9	73.6	68.
39.5	109.3	12742.7	175.0	-53.7	99.9	236.1	31.6*	26.2	17.6	361.2	999.9	99.9	999.9	78.5	67.
43.0	115.4	13732.3	150.0	-56.1	99.9	238.1	16.2*	13.8	8.6	373.4	999.9	99.9	999.9	82.9	67.
46.9	122.5	14890.0	125.0	-57.1	99.9	245.1	20.5*	18.6	8.6	391.7	999.9	99.9	999.9	99.1	66.
51.9	130.3	16308.2	100.0	-54.3	99.9	252.1	22.5*	21.4	6.9	422.9	999.9	99.9	999.9	97.3	66.
57.4	138.7	19134.2	75.0	-59.6	99.9	199.6	15.3*	5.1	14.4	448.1	999.9	99.9	999.9	101.3	65.
65.5	147.7	20669.6	50.0	-57.0	99.9	40.6	7.9*	-5.2	-6.0	509.2	999.9	99.9	999.9	101.7	64.
77.7	157.3	25104.3	25.0	-52.2	99.9	225.9	1.3	1.0	0.9	635.0	999.9	99.9	999.9	99.8	65.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 433
SALEM, ILL

6 MAY 1975
1500 GMT

151 31. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.6	175.0	989.0	23.0	10.9	190.7	3.1	0.5	3.1	299.2	320.5	8.3	46.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	6.8	259.1	975.0	21.2	16.7	99.9	99.9	99.9	99.9	298.1	330.8	12.4	75.7	99.9	99.9
1.1	9.2	523.9	950.0	19.3	17.4	99.9	99.9	99.9	99.9	298.5	333.6	13.3	88.8	99.9	99.9
1.9	11.1	734.1	925.0	19.0	14.6	99.9	99.9	99.9	99.9	300.3	330.5	11.4	75.8	99.9	99.9
2.6	13.4	989.7	900.0	17.6	15.0	99.9	99.9	99.9	99.9	311.3	333.5	12.1	84.8	99.9	99.9
3.4	15.6	1237.6	875.0	16.0	8.6	111.2	2.1	-2.0	0.8	301.5	323.8	8.2	61.9	0.1	52.
4.2	17.9	1476.5	850.0	14.6	6.0	117.4	3.5	-3.1	1.6	302.4	321.5	6.9	56.2	0.1	325.
5.1	20.2	1728.6	825.0	13.2	5.8	157.6	2.6	-1.0	2.4	303.5	323.1	7.1	61.0	0.3	311.
5.9	22.5	1966.8	800.0	11.2	4.9	215.3	2.3	1.3	1.9	304.0	323.1	6.8	65.0	0.4	329.
6.8	25.0	2251.1	775.0	9.2	5.0	266.3	2.9	2.9	0.2	304.7	324.5	7.1	75.0	0.4	347.
7.7	27.3	2522.4	750.0	7.0	4.9	262.3	4.7	4.7	0.6	305.1	325.5	7.3	86.3	0.4	17.
8.6	29.9	2800.6	725.0	4.8	2.1	252.4	7.1	6.7	2.1	305.5	323.0	6.2	82.8	0.6	44.
9.4	32.5	3096.6	700.0	3.5	-5.9	253.0	8.9	8.5	2.6	306.9	317.4	3.6	51.6	1.0	55.
10.4	35.2	3381.1	675.0	2.1	-14.1	267.1	8.8	8.8	0.4	308.2	314.0	1.9	29.0	1.5	62.
11.3	37.8	3684.4	650.0	-0.3	-16.3	280.7	10.0	9.9	-1.9	308.9	314.0	1.6	28.5	1.9	71.
12.3	40.5	3996.9	625.0	-2.6	-17.9	288.7	12.0	11.4	-3.9	309.7	314.4	1.5	29.6	2.5	79.
13.5	43.3	4319.1	600.0	-5.1	-20.2	295.2	14.2	12.8	-6.0	310.4	314.4	1.3	29.3	3.3	89.
14.6	46.2	4652.2	575.0	-7.6	-22.6	296.9	13.7	12.2	-6.2	311.2	314.8	1.1	29.1	4.2	94.
15.6	49.3	4997.2	550.0	-8.8	-32.8	303.5	12.6	10.5	-7.0	313.6	315.1	0.4	12.3	5.0	99.
16.9	52.1	5356.4	525.0	-10.3	-33.8	293.2	12.6	11.6	-5.0	316.0	317.5	0.4	12.4	5.9	102.
18.2	55.2	5731.2	500.0	-12.2	-33.4	287.2	14.2	13.5	-4.2	318.2	319.7	0.5	15.2	6.8	103.
19.4	58.0	6121.3	475.0	-14.4	-34.1	281.4	15.7	15.4	-3.1	320.2	321.7	0.4	16.6	8.0	103.
20.8	61.4	6528.6	450.0	-17.7	-35.9	278.6	16.6	16.4	-2.5	321.0	322.4	0.4	18.5	9.3	103.
22.2	64.9	6953.6	425.0	-21.3	-39.4	278.0	18.2	18.0	-2.5	321.7	322.7	0.3	17.6	10.8	102.
23.7	68.3	7398.2	400.0	-24.8	-42.3	279.4	20.5	20.2	-3.4	322.7	323.5	0.2	17.7	12.5	102.
25.2	71.8	7864.1	375.0	-28.5	-45.3	279.9	21.6	21.3	-3.7	323.8	324.5	0.2	18.0	14.4	101.
27.0	75.7	8355.3	350.0	-31.4	-47.6	281.1	23.2	22.8	-4.5	326.4	326.9	0.1	18.2	16.7	101.
28.7	79.9	8874.8	325.0	-36.0	-51.4	288.6	22.9	21.7	-7.3	327.0	327.4	0.1	18.6	19.1	101.
30.6	83.8	9425.6	300.0	-41.3	99.9	291.1	26.2	24.4	-9.4	327.1	999.9	99.9	99.9	22.0	103.
32.7	88.2	10012.7	275.0	-44.7	99.9	291.4	27.0	25.2	-9.9	330.5	999.9	99.9	99.9	25.2	104.
34.8	93.0	10645.5	250.0	-47.5	99.9	289.7	25.4	24.0	-8.1	335.5	999.9	99.9	99.9	28.5	105.
36.9	97.6	11334.1	225.0	-52.7	99.9	289.4	30.5	28.8	-10.2	337.8	999.9	99.9	99.9	32.0	105.
39.4	102.8	12187.2	200.0	-57.5	99.9	284.2	31.4	30.4	-7.7	341.6	999.9	99.9	99.9	36.8	105.
42.1	108.8	12919.1	175.0	-62.6	99.9	277.4	29.3	29.1	-3.8	346.7	999.9	99.9	99.9	41.6	105.
45.0	115.2	13862.2	150.0	-65.5	99.9	277.1	31.2	30.9	-3.9	357.2	999.9	99.9	99.9	46.9	103.
48.7	122.3	14991.3	125.0	-61.4	99.9	312.3	17.0	14.4	-9.1	383.8	999.9	99.9	99.9	52.5	104.
53.1	130.3	16392.2	100.0	-54.4	99.9	299.9	14.7	12.8	-7.3	422.7	999.9	99.9	99.9	57.3	105.
58.6	138.7	18232.1	75.0	-55.6	99.9	308.5	6.4	5.0	-4.0	456.5	999.9	99.9	99.9	60.9	106.
65.8	147.7	20816.2	50.0	-55.3	99.9	26.0	4.7	-2.1	-4.2	513.3	999.9	99.9	99.9	62.4	106.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 451
DODGE CITY, KAN

6 MAY 1975
1415 GMT

150 14. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIP DG	SPEED M/SEC	U COMP M/SEC	V CCHP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	13.6	791.0	912.9	13.9	0.5	240.0	4.7	4.1	2.4	295.2	307.3	4.4	40.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.4	14.7	910.8	900.0	12.5	-2.6	241.4	9.1	8.0	4.4	294.8	304.7	3.5	35.0	0.2	35.
1.1	16.7	1142.4	875.0	11.7	-7.8	234.8	12.3	10.0	7.1	290.2	303.2	2.4	24.8	0.6	54.
1.9	19.1	1388.6	850.0	11.5	-7.9	220.6	14.4	9.4	10.9	298.5	305.8	2.5	24.8	1.3	52.
2.8	21.3	1637.5	825.0	10.3	-8.9	214.3	17.1	9.6	14.1	299.8	306.7	2.4	24.9	2.1	45.
3.6	23.6	1892.4	800.0	8.1	-10.8	215.2	17.4	10.1	14.3	300.0	306.2	2.1	25.0	2.9	42.
4.6	25.8	2152.9	775.0	5.4	-12.9	219.9	20.4	13.1	15.6	299.9	305.3	1.8	25.1	4.0	41.
5.6	28.3	2419.8	750.0	3.7	-14.4	218.0	26.0	16.0	20.5	300.2	305.9	1.7	25.2	5.4	41.
6.6	30.9	2694.8	725.0	3.5	-16.6	208.0	26.0	12.2	22.9	303.4	307.8	1.4	21.3	7.0	39.
7.6	33.4	2978.3	700.0	1.3	-18.8	208.1	26.1	12.3	23.0	304.1	307.9	1.2	20.5	8.4	37.
8.6	35.9	3269.9	675.0	-0.0	-19.9	210.0	30.0	15.0	26.0	305.8	309.4	1.2	20.6	9.9	35.
9.5	38.6	3571.9	650.0	-0.5	-20.8	211.3	33.6	17.4	28.7	308.6	312.1	1.1	19.7	11.9	35.
10.6	41.2	3884.6	625.0	-2.0	-20.9	207.2	36.6	16.7	32.5	310.3	313.9	1.1	21.8	14.0	34.
11.5	44.0	4207.9	600.0	-4.0	-20.4	202.9	40.5	15.8	37.3	311.7	315.6	1.2	26.4	16.1	33.
12.6	47.3	4542.6	575.0	-6.4	-19.7	202.4	43.2	16.5	39.9	312.7	317.1	1.4	33.8	18.9	31.
13.7	50.0	4887.8	550.0	-9.6	-19.8	203.4	42.9*	17.0	39.4	312.8	317.4	1.4	43.1	21.7	31.
14.9	52.9	5244.9	525.0	-12.8	-27.7	206.3	39.3*	17.4	35.3	313.1	315.6	0.8	27.8	24.9	29.
16.2	55.9	5616.0	500.0	-14.4	-29.9	215.1	38.9*	22.4	31.8	315.5	317.6	0.6	25.3	27.8	30.
17.5	59.1	6002.6	475.0	-16.8	-32.9	214.5	38.9*	22.1	32.1	317.2	318.9	0.5	23.0	31.0	30.
18.9	62.5	6408.5	450.0	-17.5	-33.5	215.0	35.6*	20.5	29.2	321.3	323.0	0.5	23.1	33.9	31.
20.2	65.8	6834.5	425.0	-20.2	-35.8	215.4	37.1*	21.5	30.2	323.1	324.6	0.4	23.2	36.9	31.
21.7	69.4	7290.7	400.0	-23.9	-38.9	216.5	30.1*	17.9	24.2	323.9	325.1	0.3	23.5	39.7	31.
23.3	73.0	7747.6	375.0	-28.3	-42.6	216.4	34.5*	20.5	27.8	324.1	325.0	0.2	23.8	42.5	32.
25.1	77.0	9238.9	350.0	-32.4	-46.0	214.6	35.4*	20.1	29.2	325.0	325.7	0.2	24.0	46.9	32.
26.9	80.9	8757.7	325.0	-36.2	-49.3	211.1	33.2*	17.1	28.4	326.7	327.2	0.1	24.3	50.1	32.
29.0	85.1	9317.9	300.0	-40.8	99.9	209.0	32.9*	16.0	28.8	327.9	999.9	99.9	999.9	54.2	32.
31.0	89.4	9893.2	275.0	-45.9	99.9	211.2	23.6*	12.2	20.2	328.8	999.9	99.9	999.9	58.0	32.
33.2	94.2	10521.1	250.0	-51.0	99.9	209.7	31.6*	15.6	27.4	330.2	999.9	99.9	999.9	62.0	32.
35.5	99.3	11157.0	225.0	-56.2	99.9	205.6	23.0*	9.9	20.7	332.4	999.9	99.9	999.9	65.2	31.
38.1	104.5	11938.9	200.0	-59.8	99.9	206.9	25.5*	11.5	22.7	338.0	999.9	99.9	999.9	69.8	31.
41.1	110.4	12777.0	175.0	-58.9	99.9	230.5	17.8*	13.7	11.3	352.8	999.9	99.9	999.9	73.1	32.
44.5	116.8	13743.8	150.0	-58.3	99.9	239.4	24.6*	21.2	12.5	369.6	999.9	99.9	999.9	77.7	33.
48.6	124.0	14967.4	125.0	-59.0	99.9	231.5	28.0*	21.9	17.4	388.1	999.9	99.9	999.9	81.9	35.
53.7	132.0	16300.6	100.0	-56.0	99.9	237.4	13.6*	11.5	7.3	419.6	999.9	99.9	999.9	87.0	36.
59.9	140.3	18115.6	75.0	-59.7	99.9	21.0	4.0	-1.4	-3.7	447.8	999.9	99.9	999.9	88.6	36.
67.9	149.3	20651.3	50.0	-58.6	99.9	99.9	1.3	-1.3	0.2	505.5	999.9	99.9	999.9	88.2	37.
79.5	158.7	25054.9	25.0	-51.9	99.9	323.3	3.3	2.0	-2.7	635.9	999.9	99.9	999.9	86.9	37.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 456
TOPEKA, KAN

6 MAY 1975
1415 GMT

164 19.0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.9	268.0	972.3	22.8	19.0	140.0	4.2	-2.7	3.2	303.3	338.3	14.4	79.0	0.0	7.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	8.7	469.7	950.0	20.1	18.6	168.9	8.3	-1.6	8.1	299.5	337.4	14.4	91.1	0.3	339.
1.4	10.7	700.1	925.0	18.6	17.9	183.7	10.1	0.7	10.1	300.2	337.5	14.1	95.9	0.7	348.
2.2	12.8	935.5	900.0	17.3	16.7	195.3	11.7	3.1	11.3	301.1	336.9	13.4	96.2	1.2	358.
3.1	15.0	1176.3	875.0	15.8	14.8	205.3	12.2	5.2	11.0	301.8	334.6	12.2	93.8	1.8	6.
4.1	17.0	1422.8	850.0	14.4	13.2	207.6	13.2	6.1	11.7	302.7	333.4	11.3	92.7	2.6	12.
5.0	19.3	1675.1	825.0	12.3	10.8	210.3	12.4	6.3	10.7	303.0	330.2	10.0	90.8	3.3	16.
6.2	21.4	1933.0	800.0	12.1	-1.4	203.2	13.5	5.3	12.4	303.6	317.1	4.3	39.2	4.2	18.
7.4	23.8	2200.3	775.0	13.7	-12.0	192.2	12.1	2.6	11.8	308.8	315.0	2.0	15.8	5.1	18.
8.6	26.0	2474.9	750.0	11.1	-14.8	194.7	11.7	3.0	11.3	308.9	313.9	1.6	14.7	5.9	18.
9.6	28.5	2756.5	725.0	8.8	-15.3	192.4	10.7	2.3	10.5	309.4	314.4	1.6	16.4	6.7	17.
10.8	31.0	3045.2	700.0	7.0	-29.0	184.1	9.1	0.6	9.1	310.3	311.9	0.5	5.5	7.4	17.
11.9	33.6	3342.7	675.0	4.5	-25.1	181.0	7.5	0.1	7.5	310.8	313.2	0.7	9.4	7.9	15.
13.1	36.1	3648.1	650.0	1.6	-26.4	195.5	7.9	2.1	7.6	310.8	313.1	0.7	10.3	8.4	15.
14.3	38.8	3962.1	625.0	-1.4	-25.8	215.4	10.4	6.0	8.5	310.9	313.4	0.7	13.5	9.0	16.
15.6	41.3	4295.5	600.0	-4.4	-24.6	228.6	12.8	9.6	8.5	311.2	314.0	0.9	18.7	9.6	18.
16.8	44.2	4619.1	575.0	-7.1	-23.9	236.5	14.5	12.1	8.0	311.8	314.9	1.0	24.5	10.7	21.
18.0	47.1	4964.0	550.0	-9.4	-30.0	232.2	13.9	11.0	8.5	312.9	314.8	0.6	16.8	11.6	24.
19.4	50.2	5321.2	525.0	-12.9	-32.7	227.6	12.9	9.5	8.7	312.9	314.5	0.5	17.1	12.6	26.
20.9	53.3	5690.7	500.0	-15.9	-36.7	217.0	16.8	10.1	13.4	313.6	314.8	0.3	15.0	13.7	28.
22.4	56.3	6076.8	475.0	-16.6	-49.7	217.8	22.1	13.6	17.5	317.3	317.7	0.1	4.7	15.6	29.
23.8	59.7	6482.0	450.0	-18.4	-61.6	218.6	21.8	13.6	17.0	320.0	320.1	0.0	1.0	17.3	30.
25.2	63.3	6906.1	425.0	-21.6	-63.7	219.7	22.0	14.0	16.9	321.2	321.3	0.0	1.0	19.3	31.
26.8	66.7	7349.9	400.0	-24.9	-65.8	225.0	21.2	15.0	15.0	322.5	322.6	0.0	1.0	21.2	32.
28.5	70.5	7816.1	375.0	-28.2	-62.5	233.9	22.4	18.1	13.2	324.2	324.3	0.0	2.5	23.5	34.
30.4	74.3	8306.9	350.0	-32.4	-56.4	236.4	23.3	19.4	12.9	325.0	325.2	0.1	7.1	25.8	36.
32.3	78.7	8824.7	325.0	-36.4	-58.3	233.1	20.0	16.0	12.0	326.4	326.5	0.0	8.3	28.2	37.
34.1	83.0	9374.0	300.0	-41.4	99.9	230.7	19.4	15.0	12.3	327.0	999.9	99.9	999.9	30.1	38.
36.1	87.5	9959.0	275.0	-46.4	99.9	224.1	20.7	14.4	14.9	328.0	999.9	99.9	999.9	32.5	39.
38.7	93.0	10582.8	250.0	-52.0	99.9	224.6	23.7	16.7	16.9	328.8	999.9	99.9	999.9	35.5	40.
41.0	98.3	11257.6	225.0	-56.7	99.9	223.7	18.5	12.8	13.4	331.6	999.9	99.9	999.9	38.4	40.
43.8	104.3	11996.1	200.0	-61.2	99.9	222.6	20.1	13.6	14.8	335.9	999.9	99.9	999.9	42.0	40.
46.9	111.0	12824.4	175.0	-59.8	99.9	237.9	11.5	9.7	6.1	351.3	999.9	99.9	999.9	45.3	41.
50.3	118.7	13775.7	150.0	-64.1	99.9	242.7	17.7	15.7	8.1	359.8	999.9	99.9	999.9	47.5	41.
54.4	127.7	14897.4	125.0	-60.1	99.9	266.9	20.2	20.2	1.1	386.1	999.9	99.9	999.9	51.2	43.
59.3	137.7	16301.6	100.0	-58.7	99.9	274.1	11.9	11.9	-0.9	414.3	999.9	99.9	999.9	52.4	47.
65.5	147.5	18101.1	75.0	-60.9	99.9	266.4	6.3	6.3	0.4	445.3	999.9	99.9	999.9	54.9	50.
73.9	157.7	21645.2	50.0	-58.6	99.9	337.0	2.8	1.1	-2.6	505.5	999.9	99.9	999.9	54.7	52.
87.8	167.0	25089.8	25.0	-50.3	99.9	285.7	2.0	2.8	-0.8	640.1	999.9	99.9	999.9	52.1	53.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 476
GRAND JUNCTION, COLO

6 MAY 1975
1415 GMT

150 21. 0

TIME MTN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	20.5	1474.0	845.2	2.8	-0.5	360.0	1.0	0.0	-1.0	290.1	301.9	4.4	79.0	0.0	0.
99.9	99.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	59.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	59.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	59.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	59.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	59.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	59.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.7	22.4	1669.2	825.0	0.6	-3.2	292.0	0.2	0.2	-0.1	289.7	299.7	3.7	75.7	0.1	173.
1.5	25.0	1915.6	800.0	-1.2	-5.4	241.9	4.4	3.9	2.1	290.3	299.1	3.2	72.7	0.1	140.
2.3	27.4	2164.2	775.0	-3.0	-7.8	250.6	7.5	7.0	2.5	290.9	298.6	2.8	69.4	0.4	79.
3.0	30.1	2427.0	750.0	-5.4	-10.5	256.0	9.1	8.8	2.2	291.0	297.5	2.3	67.4	0.7	77.
3.9	32.9	2692.4	725.0	-7.0	-13.5	260.5	8.0	7.9	1.3	292.0	297.3	1.9	60.0	1.2	77.
4.6	35.5	2965.3	700.0	-9.3	-14.5	264.4	7.0	6.9	0.7	292.4	297.5	1.8	65.7	1.5	78.
5.5	38.2	3245.2	675.0	-11.8	-15.1	277.9	6.1	6.1	-0.8	292.6	297.7	1.8	76.6	1.8	80.
6.5	40.9	3533.0	650.0	-14.1	-15.1	269.9	7.4	7.4	0.0	293.2	298.5	1.8	92.0	2.2	83.
7.5	43.9	3829.6	625.0	-16.1	-20.5	263.4	10.5	10.5	1.2	294.2	297.8	1.2	68.9	2.7	84.
8.4	46.9	4136.5	600.0	-17.6	-25.9	262.7	11.9	11.8	1.5	295.8	298.1	0.8	48.2	3.4	83.
9.4	50.0	4453.9	575.0	-19.5	-30.1	273.2	10.4	10.3	-0.6	297.2	298.9	0.5	38.1	4.1	84.
10.4	53.0	4782.4	550.0	-22.3	-32.5	284.4	8.3	8.1	-2.1	297.6	299.1	0.4	38.8	4.7	86.
11.5	56.1	5122.5	525.0	-25.0	-32.6	278.0	4.9	4.8	-0.7	298.4	299.9	0.5	48.7	5.0	87.
12.6	59.4	5475.0	500.0	-28.2	-32.6	258.8	5.2	5.1	1.0	298.6	300.2	0.5	65.9	5.3	87.
13.8	63.0	5840.4	475.0	-31.6	-36.5	258.0	6.6	6.4	1.4	298.9	300.0	0.3	61.1	5.7	86.
15.1	66.4	6220.4	450.0	-35.0	-42.7	260.7	6.5	6.4	1.0	299.2	299.8	0.2	44.9	6.3	86.
16.3	70.1	6615.3	425.0	-38.2	-44.0	284.9	2.9	2.8	-0.7	300.0	300.6	0.2	54.3	6.7	86.
17.6	73.8	7030.7	400.0	-41.6	99.9	41.5	2.3	-1.5	-1.7	300.9	999.9	99.9	999.9	6.7	97.
19.1	77.9	7464.8	375.0	-45.4	99.9	82.9	0.5	-0.5	-0.1	301.5	999.9	99.9	999.9	6.5	88.
20.6	81.8	7926.6	350.0	-43.7	99.9	248.4	7.8	7.3	2.9	309.9	999.9	99.9	999.9	6.7	87.
22.4	86.0	8427.8	325.0	-41.1	99.9	250.7	17.9	16.9	5.9	320.0	999.9	99.9	999.9	6.1	83.
24.1	90.4	8976.3	300.0	-38.8	99.9	253.0	22.0	21.0	6.4	330.7	999.9	99.9	999.9	10.1	82.
26.0	95.2	9573.7	275.0	-39.1	99.9	246.3	18.6	17.0	7.5	338.6	999.9	99.9	999.9	12.5	80.
28.2	100.2	10225.8	250.0	-40.3	99.9	245.3	19.9	18.1	8.3	340.2	999.9	99.9	999.9	14.9	77.
30.8	105.5	10941.7	225.0	-41.6	99.9	238.8	19.6	16.7	10.2	354.8	999.9	99.9	999.9	17.9	75.
33.6	111.2	11735.2	200.0	-45.4	99.9	228.8	19.8	14.9	13.1	361.0	999.9	99.9	999.9	21.3	71.
36.6	117.3	12615.9	175.0	-50.3	99.9	230.1	23.4	18.0	15.0	366.9	999.9	99.9	999.9	25.1	68.
40.4	124.3	13627.9	150.0	-51.1	99.9	240.2	15.3	13.2	7.6	382.1	999.9	99.9	999.9	29.5	66.
44.6	131.7	14802.2	125.0	-50.8	99.9	234.5	12.2	9.9	7.1	403.1	999.9	99.9	999.9	32.7	65.
49.3	139.7	16249.4	100.0	-51.5	99.9	194.1	11.4	2.8	11.1	428.2	999.9	99.9	999.9	35.1	62.
55.3	148.0	18111.5	75.0	-53.9	99.9	180.1	6.1	0.0	6.1	460.0	999.9	99.9	999.9	37.2	58.
62.8	157.3	20680.2	50.0	-56.5	99.9	287.0	3.0	2.8	-0.9	510.5	999.9	99.9	999.9	37.7	58.
73.7	167.3	25108.5	25.0	-52.2	99.9	999.9	99.9	99.9	99.9	635.1	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 11001
MARSHALL SPACE FLIGHT CENTER

6 MAY 1975

1427 GMT

160 25. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	CIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.7	6.2	180.0	993.1	19.8	15.0	180.0	1.0	0.0	1.0	295.0	323.6	10.9	74.0	0.3	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.7	7.8	338.4	975.0	17.9	14.3	194.9	5.2	1.3	5.0	294.6	322.3	10.6	79.5	0.2	348.
1.6	10.0	560.5	950.0	17.0	13.2	203.3	10.6	4.2	9.7	295.8	322.5	10.1	78.1	0.5	9.
2.6	12.0	788.5	925.0	16.6	14.1	212.1	12.0	6.4	10.2	297.8	327.0	11.0	85.1	1.3	22.
3.4	14.3	1021.9	900.0	15.1	13.1	206.9	9.1	4.1	8.1	298.5	326.8	10.6	87.6	1.8	24.
4.3	16.4	1260.9	875.0	13.9	13.8	204.6	7.7	3.2	7.0	299.8	330.3	11.4	99.0	2.2	24.
5.2	18.6	1505.6	850.0	12.4	11.8	214.7	7.1	4.1	5.9	300.5	328.3	10.3	95.9	2.6	25.
6.2	20.8	1756.3	825.0	12.1	8.1	225.3	6.3	4.5	4.4	302.4	325.2	8.3	77.2	3.0	27.
7.3	23.3	2014.0	800.0	10.8	5.0	231.7	5.7	4.5	3.5	303.5	322.6	6.8	67.2	3.3	29.
8.2	25.6	2278.4	775.0	8.8	6.7	251.9	5.4	5.1	1.7	304.3	326.5	8.0	86.7	3.6	32.
9.3	28.0	2549.4	750.0	6.9	6.2	261.4	6.2	6.1	0.9	305.1	327.3	8.0	95.4	3.8	36.
10.3	30.6	2827.8	725.0	5.4	0.1	246.8	7.0	6.5	2.8	306.1	321.6	5.5	71.2	4.2	40.
11.4	33.2	3114.1	700.0	3.8	-6.6	247.5	4.9	4.5	1.9	307.1	316.8	3.3	45.8	4.6	42.
12.5	35.7	3408.4	675.0	1.9	-11.2	274.4	3.9	3.9	-0.3	308.0	315.3	2.4	37.2	4.7	43.
13.6	38.4	3711.5	650.0	-0.7	-10.7	284.0	5.9	5.7	-1.4	308.5	316.4	2.6	47.2	4.9	47.
14.8	41.0	4023.4	625.0	-2.5	-15.1	298.6	8.3	7.3	-4.0	309.8	315.6	1.9	37.3	5.2	52.
16.1	43.9	4345.7	600.0	-5.2	-22.3	303.1	9.9	8.3	-5.4	310.2	313.6	1.1	24.8	5.5	59.
17.2	46.9	4678.1	575.0	-8.2	-22.0	305.3	10.9	8.9	-6.3	310.5	314.1	1.1	31.9	5.8	65.
18.4	49.9	5021.4	550.0	-11.4	-18.3	297.8	11.9	10.5	-5.6	310.8	315.0	1.6	56.6	6.3	72.
19.7	52.9	5377.5	525.0	-10.9	-43.9	289.8	11.0	10.4	-3.7	315.3	316.4	0.4	12.7	7.0	77.
21.0	55.9	5751.8	500.0	-12.3	-41.6	287.1	12.2	11.7	-3.6	318.0	316.7	0.2	6.6	7.8	80.
22.5	59.3	6141.1	475.0	-15.9	-43.1	291.2	12.9	12.0	-4.7	318.3	318.9	0.2	7.5	8.8	83.
23.9	62.6	6546.0	450.0	-19.0	-44.1	296.0	12.2	11.0	-5.4	319.3	319.9	0.2	6.7	9.7	87.
25.4	66.0	6969.1	425.0	-21.7	-48.7	295.3	12.8	11.6	-5.5	321.1	321.6	0.1	6.5	10.7	90.
26.9	69.8	7412.7	400.0	-25.3	-51.1	298.4	15.1	13.3	-7.2	322.0	322.3	0.1	6.9	11.8	92.
28.5	73.8	7878.9	375.0	-27.8	-52.7	293.0	19.7	18.1	-7.7	324.7	325.0	0.1	7.2	13.3	95.
30.2	77.7	8371.3	350.0	-31.3	-55.0	287.8	24.5	23.3	-7.5	326.5	326.7	0.1	7.5	15.5	97.
32.0	81.7	8891.8	325.0	-35.4	-57.8	287.3	25.2	24.1	-7.5	327.8	328.0	0.0	7.9	18.1	99.
33.7	86.0	9443.7	300.0	-39.7	-60.8	286.6	29.5	28.4	-7.9	329.4	329.5	0.0	8.4	20.9	100.
35.7	90.8	10032.2	275.0	-45.0	99.9	282.8	35.0	34.1	-7.8	330.1	999.9	99.9	999.9	24.7	101.
37.7	95.8	10662.6	250.0	-50.1	99.9	283.4	34.4	33.5	-8.0	331.6	999.9	99.9	999.9	29.0	101.
40.0	101.0	11343.6	225.0	-54.3	99.9	284.3	40.0	38.7	-9.9	335.3	999.9	99.9	999.9	34.0	102.
42.4	107.0	12087.2	200.0	-61.3	99.9	282.1	49.6	48.5	-10.4	335.6	999.9	99.9	999.9	40.5	102.
44.8	113.3	12902.5	175.0	-67.6	99.9	292.6	42.2	38.9	-16.2	338.3	999.9	99.9	999.9	47.3	102.
47.4	120.3	13823.8	150.0	-65.9	99.9	303.2	37.8	31.6	-20.7	356.6	999.9	99.9	999.9	54.2	105.
51.5	128.0	14946.1	125.0	-61.5	99.9	294.9	23.2	21.0	-9.8	383.6	999.9	99.9	999.9	60.2	106.
56.0	136.5	16322.1	100.0	-64.8	99.9	263.1	26.0	25.8	3.1	402.5	999.9	99.9	999.9	66.2	106.
61.8	145.3	18074.2	75.0	-64.7	99.9	314.4	13.9	10.0	-9.7	437.3	999.9	99.9	999.9	74.0	105.
69.6	155.0	20577.5	50.0	-62.2	99.9	53.8	4.0	-3.3	-2.4	496.6	999.9	99.9	999.9	75.6	107.
81.1	165.0	24975.4	25.0	-51.0	99.9	999.9	99.9	99.9	99.9	638.0	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 22002
FT. SILL, OKLA

6 MAY 1975
1505 GMT

155 13. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.1	362.0	962.9	23.3	18.6	230.0	10.0	7.7	6.4	301.6	339.4	14.2	75.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.4	10.1	479.9	950.0	22.0	16.7	260.7	3.4	3.4	0.6	301.2	335.2	12.7	71.9	0.2	32.
1.4	12.2	711.1	925.0	19.7	14.8	264.5	4.5	4.5	0.4	301.0	332.0	11.6	73.5	0.3	59.
2.4	14.5	947.0	900.0	18.3	9.4	300.8	6.0	5.1	-3.1	301.5	324.1	8.3	56.4	0.6	80.
3.3	16.5	1187.8	875.0	16.4	5.6	310.2	9.0	6.9	-5.8	301.7	319.9	6.6	49.1	0.9	99.
4.2	18.9	1433.9	850.0	15.5	-5.0	318.9	11.4	7.5	-8.6	302.8	312.0	3.2	24.3	1.4	112.
5.1	21.1	1686.2	825.0	14.3	-5.6	321.2	8.7	5.4	-6.8	304.1	313.1	3.1	24.8	2.0	122.
6.3	23.6	1945.6	800.0	13.7	-5.3	291.5	7.5	7.0	-2.7	306.2	315.7	3.2	26.4	2.5	123.
7.4	25.8	2212.5	775.0	13.2	-5.7	259.7	11.7	11.5	2.1	308.4	318.0	3.2	26.4	3.0	117.
8.7	28.4	2487.0	750.0	11.1	-7.5	254.3	13.5	13.0	3.7	309.0	317.7	2.9	26.4	3.8	108.
9.8	31.0	2768.9	725.0	9.8	-8.5	243.1	13.3	11.8	6.0	310.6	319.0	2.8	26.5	4.6	100.
11.0	33.7	3059.0	700.0	7.2	-9.1	231.2	12.3	9.6	7.7	310.8	319.1	2.7	30.2	5.3	94.
12.1	36.1	3356.6	675.0	5.0	-9.2	218.0	14.3	8.8	11.2	311.6	320.1	2.8	35.0	5.9	87.
13.3	38.9	3663.5	650.0	2.8	-6.0	208.4	18.4	8.7	16.2	312.6	323.9	3.8	52.3	6.7	79.
14.6	41.6	3979.9	625.0	0.5	-12.8	204.4	20.2	8.4	18.4	313.2	320.3	2.3	36.2	7.6	70.
15.9	44.4	4305.8	600.0	-2.4	-12.2	206.2	21.6	9.5	19.4	313.6	321.4	2.5	47.0	8.8	62.
17.1	47.3	4642.3	575.0	-4.9	-15.6	211.8	24.5	12.9	20.8	314.5	320.7	2.0	42.4	10.3	57.
18.4	50.3	4990.0	550.0	-8.0	-17.7	216.9	25.1	15.1	20.1	314.8	320.2	1.7	45.2	12.1	54.
19.7	53.3	5349.5	525.0	-11.0	-21.0	220.0	25.2	16.2	19.3	315.3	319.8	1.4	44.0	14.1	51.
21.2	56.3	5723.4	500.0	-12.2	-30.8	216.5	22.7	13.5	18.2	318.2	320.1	0.6	19.4	16.1	50.
22.7	59.7	6114.0	475.0	-14.5	-31.9	219.8	22.1	14.2	17.0	320.1	322.0	0.5	21.0	18.0	48.
24.2	63.1	6521.9	450.0	-17.1	-34.6	220.5	23.0	14.9	17.5	321.8	323.3	0.4	20.0	20.1	48.
25.7	66.6	6947.3	425.0	-21.2	-38.4	218.1	23.1	14.2	18.2	321.8	323.0	0.3	19.3	22.1	47.
27.3	70.3	7391.7	400.0	-24.9	-41.4	213.7	23.6	13.1	19.7	322.6	323.5	0.2	19.6	24.4	46.
28.9	73.9	7857.4	375.0	-28.6	-44.5	216.2	23.2	13.7	18.8	323.6	324.3	0.2	19.9	26.6	45.
30.6	78.0	8347.4	350.0	-32.4	-47.6	226.0	26.4	19.0	18.3	325.0	325.6	0.1	20.1	29.0	45.
32.3	82.0	8866.2	325.0	-36.3	-50.8	237.4	29.6	24.9	15.9	326.6	327.0	0.1	20.4	31.8	45.
34.2	86.2	9417.0	300.0	-40.4	99.9	243.6	37.6	33.7	16.7	328.5	999.9	99.9	999.9	35.3	47.
36.1	90.8	10004.3	275.0	-45.0	99.9	242.8	42.3	37.6	19.3	330.0	999.9	99.9	999.9	39.9	49.
38.5	95.7	10634.5	250.0	-49.6	99.9	242.3	44.8	39.7	20.8	332.3	999.9	99.9	999.9	45.9	51.
40.9	100.8	11317.0	225.0	-54.1	99.9	245.9	38.3	35.0	15.6	335.5	999.9	99.9	999.9	52.6	52.
43.5	106.4	12065.7	200.0	-57.7	99.9	241.8	37.0	32.6	17.5	341.4	999.9	99.9	999.9	57.8	54.
46.0	112.3	12900.7	175.0	-60.6	99.9	248.3	37.0	34.4	13.7	350.0	999.9	99.9	999.9	64.4	54.
49.0	118.8	13863.0	150.0	-59.5	99.9	254.0	32.9	31.7	9.1	367.6	999.9	99.9	999.9	69.9	56.
52.3	126.0	15005.6	125.0	-57.9	99.9	259.3	29.3	28.8	5.4	390.2	999.9	99.9	999.9	76.3	57.
56.1	134.0	16397.2	100.0	-63.4	99.9	248.6	21.3	19.8	7.8	405.3	999.9	99.9	999.9	80.4	59.
60.9	142.0	18187.2	75.0	-63.7	99.9	277.7	10.0	9.9	-1.4	439.3	999.9	99.9	999.9	84.1	59.
66.9	150.3	23697.3	50.0	-56.8	99.9	245.8	3.0	2.7	1.2	509.6	999.9	99.9	999.9	83.9	59.
77.2	159.0	25126.1	25.0	-50.9	99.9	60.1	3.3	-2.9	-1.7	638.5	999.9	99.9	999.9	81.4	60.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

Sounding Data

6 May 1975

1800 GMT

63 - 84
64 - 84

STATION NO. 232
BOOTHVILLE, LA

6 MAY 1975
1715 GMT

165 25. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SFC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	RH PCT	RANGE KM	AZ DG
0.1	5.4	1.0	1011.3	27.8	24.2	170.0	6.2	-1.1	6.1	302.6	353.4	19.2	81.0	0.0	0.
0.5	6.3	100.8	1000.0	25.6	23.3	156.4	12.1	-4.9	11.1	301.2	349.4	18.3	87.2	0.3	335.
1.3	8.8	324.0	975.0	23.5	23.3	164.5	10.0	-2.7	9.6	301.4	351.0	18.8	98.6	0.8	337.
2.2	11.1	551.2	951.0	21.5	21.0	176.1	12.7	-0.9	12.7	301.3	345.6	16.8	97.0	1.4	343.
3.2	13.7	783.1	925.0	20.5	17.9	183.7	11.9	0.8	11.9	302.2	340.0	14.1	84.9	2.1	349.
4.2	16.0	1019.7	900.0	19.2	14.3	183.2	13.0	0.7	12.9	302.8	334.7	11.5	73.7	2.5	353.
5.1	18.7	1261.9	875.0	17.8	10.9	182.3	12.8	0.5	12.8	303.6	329.4	9.4	64.0	3.5	355.
5.8	21.1	1510.2	850.0	17.6	6.1	185.1	8.1	0.7	8.1	305.6	325.2	7.0	46.7	4.1	356.
6.8	23.8	1765.3	825.0	17.0	3.8	219.5	4.8	3.0	3.7	307.4	324.9	6.1	41.4	4.3	357.
7.7	26.3	2027.1	800.0	15.4	1.6	235.7	7.7	6.4	4.4	308.3	323.8	5.4	39.3	4.5	1.
8.7	29.1	2295.8	775.0	14.3	-2.4	228.7	9.5	7.1	6.2	309.8	322.0	4.2	31.4	4.9	6.
9.7	31.9	2571.7	750.0	12.3	-4.1	217.9	8.6	5.3	6.8	310.4	321.6	3.8	31.5	5.3	10.
10.8	34.9	2854.8	725.0	10.4	-7.4	200.4	8.4	2.9	7.8	311.3	320.4	3.0	27.7	5.8	11.
11.8	37.6	3145.7	700.0	8.3	-9.4	203.9	8.9	3.6	8.1	312.0	320.2	2.7	27.3	6.4	12.
12.9	40.5	3444.9	675.0	6.3	-7.4	233.0	10.1	8.1	6.1	313.1	322.9	3.2	36.8	6.9	14.
14.1	43.4	3753.3	650.0	3.9	-2.1	249.2	12.8	12.0	4.5	314.1	329.2	5.1	65.1	7.5	19.
15.3	46.6	4071.3	625.0	2.2	-14.0	261.3	15.2	15.0	2.3	315.2	321.7	2.1	28.9	8.1	25.
16.5	49.9	4399.6	600.0	-0.2	-17.2	267.6	20.2	20.1	0.9	316.1	321.3	1.7	26.4	8.7	32.
17.6	52.6	4738.9	575.0	-2.3	-17.9	270.0	22.5	22.5	-0.0	317.4	322.7	1.6	28.9	9.7	39.
18.9	55.7	5089.8	550.0	-5.7	-21.5	273.0	24.3	24.3	-1.3	317.5	321.6	1.2	27.3	10.8	47.
20.2	59.0	5452.2	525.0	-8.9	-17.0	272.2	27.5	27.5	-1.1	317.9	324.0	1.9	52.0	12.3	54.
21.5	62.6	5828.4	500.0	-11.7	-15.8	267.1	29.6	29.6	1.5	319.0	326.0	2.2	71.6	14.1	59.
22.8	65.9	6219.5	475.0	-14.6	-18.6	270.3	29.2	29.2	-0.1	320.1	326.0	1.9	71.6	16.1	63.
24.3	69.6	6626.7	450.0	-18.1	-21.2	271.4	28.4	28.4	-0.7	320.6	325.8	1.6	77.0	18.6	67.
25.8	73.2	7054.9	425.0	-17.6	-34.2	275.9	27.3	27.2	-2.8	326.4	328.1	0.5	21.9	20.9	70.
27.6	77.2	7506.6	400.0	-21.1	-34.6	292.4	29.8	27.6	-11.4	328.9	330.6	0.5	25.9	23.2	74.
29.3	81.0	7981.8	375.0	-23.5	-37.5	289.9	32.2	30.3	-11.0	330.4	331.9	0.4	26.2	25.9	78.
31.0	85.3	8482.7	350.0	-27.2	-39.7	292.5	34.8	32.1	-13.3	332.1	333.3	0.3	29.0	28.8	82.
32.8	89.5	9011.9	325.0	-31.5	-42.9	287.8	38.4	36.6	-21.7	333.2	334.2	0.3	31.1	32.5	85.
34.9	94.2	9572.4	300.0	-36.6	-46.4	285.1	34.2	32.0	-8.9	333.6	334.4	0.2	35.1	36.6	88.
36.7	98.8	10170.0	275.0	-41.2	-99.9	283.0	39.4	38.4	-8.9	335.6	999.9	99.9	999.9	40.7	89.
39.0	103.8	10810.3	250.0	-46.0	99.9	281.3	42.7	41.9	-8.3	337.7	999.9	99.9	999.9	46.3	91.
41.2	108.2	11592.0	225.0	-52.2	99.9	283.8	43.9	42.7	-10.5	339.5	999.9	99.9	999.9	51.9	92.
43.6	114.8	12254.3	200.0	-57.7	99.9	288.4	45.5	43.2	-14.4	341.4	999.9	99.9	999.9	58.8	94.
46.3	121.0	13086.9	175.0	-62.5	99.9	284.1	41.3	40.1	-10.1	346.7	999.9	99.9	999.9	65.2	95.
49.4	127.7	14033.2	150.0	-64.0	99.9	277.1	42.9	42.6	-5.3	359.8	999.9	99.9	999.9	73.8	96.
52.8	135.3	15152.4	125.0	-65.6	99.9	288.8	47.8*	45.2	-15.4	376.3	999.9	99.9	999.9	83.2	96.
56.9	142.3	16551.7	100.0	-67.0	99.9	314.2	22.1*	18.3	-12.4	398.2	999.9	99.9	999.9	92.8	98.
62.2	157.3	18236.8	75.0	-73.0	99.9	270.6	12.7	12.7	-0.1	419.9	999.9	99.9	999.9	95.9	99.
69.7	159.5	20682.7	50.0	-59.5	99.9	91.5	7.0	-7.0	0.2	503.3	999.9	99.9	999.9	97.1	99.
82.4	169.0	25121.1	25.0	-46.9	99.9	999.9	99.9	99.9	99.9	649.8	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 235
JACKSON, MISS

6 MAY 1975
1800 GMT

151 15. 0

TIME MIN	CNTCT	HEIGHT GPN	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	F POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	4.5	100.0	999.3	23.3	20.8	170.0	7.2	-1.3	7.1	298.6	339.8	15.7	86.0	0.0	0.0
99.9	90.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.6	6.1	314.4	975.0	20.8	18.9	158.0	10.2	-3.8	9.4	298.0	335.4	14.2	88.5	0.3	34.0
1.2	8.1	539.4	950.0	19.4	17.1	165.8	14.6	-3.6	14.1	298.6	333.2	13.1	86.8	0.7	340.0
1.9	10.1	769.8	925.0	19.8	13.9	175.1	19.1	-1.6	19.0	301.0	330.4	10.9	69.1	1.5	346.0
2.6	11.8	1036.0	900.0	18.9	10.4	181.7	18.6	0.5	18.6	312.1	326.3	8.8	57.8	2.3	350.0
3.6	13.9	1247.6	875.0	17.5	10.0	192.3	15.8	3.4	15.4	303.2	327.6	8.9	61.6	3.2	355.0
4.4	15.9	1494.9	850.0	15.8	8.9	208.3	11.2	5.3	9.8	303.8	327.1	8.5	63.5	3.8	359.0
5.3	18.1	1747.8	825.0	13.7	9.8	223.6	11.8	8.1	8.5	304.3	329.8	9.3	77.4	4.3	4.0
6.2	20.1	2007.2	800.0	11.7	10.7	242.3	13.9	12.3	6.4	305.0	333.0	10.2	93.8	4.8	10.0
7.2	22.2	2273.2	775.0	10.5	9.4	253.4	14.8	14.2	4.2	306.4	333.3	9.7	93.2	5.3	18.0
8.1	24.5	2545.6	750.0	8.6	2.4	258.3	14.7	14.4	3.0	306.7	324.0	6.1	65.1	5.8	26.0
9.2	26.5	2826.0	725.0	7.2	1.3	263.5	12.0	11.9	1.4	304.1	324.8	5.8	65.6	6.3	32.0
10.2	28.9	3114.3	700.0	6.1	-0.6	272.3	9.5	9.5	-0.4	310.0	325.3	5.0	62.1	6.7	36.0
11.3	31.4	3412.2	675.0	4.8	-3.3	275.9	7.9	7.9	-0.8	311.6	324.7	4.5	55.8	7.0	41.0
12.3	33.9	3719.2	650.0	3.4	-8.2	295.4	6.9	6.2	-3.0	313.2	322.9	3.2	42.3	7.2	43.0
13.3	36.2	4037.3	625.0	2.7	-16.0	310.4	8.5	6.5	-5.5	315.7	321.3	1.8	23.8	7.3	47.0
14.3	38.9	4365.7	600.0	-0.3	-16.6	306.3	9.7	7.8	-5.8	316.0	321.5	1.7	28.0	7.4	51.0
15.4	41.3	4704.1	575.0	-3.5	-16.5	300.4	10.4	8.9	-5.2	316.1	321.9	1.8	35.6	7.6	56.0
16.7	44.1	5053.3	550.0	-6.5	-22.4	296.5	11.8	10.5	-5.3	316.4	320.2	1.1	27.0	8.0	61.0
17.9	46.9	5416.9	525.0	-6.7	-29.1	289.7	14.3	13.4	-4.8	320.4	322.6	0.6	14.8	8.7	67.0
19.3	49.9	5795.5	500.0	-9.3	-38.7	294.3	16.6	15.2	-6.8	321.7	322.6	0.3	7.1	9.6	72.0
20.5	52.6	6191.5	475.0	-11.7	-40.5	293.8	17.4	15.9	-7.0	323.5	324.3	0.2	7.0	10.5	76.0
21.9	55.7	6601.5	450.0	-15.7	-43.0	291.6	18.1	16.8	-6.7	323.5	324.2	0.2	7.4	11.8	81.0
23.3	58.8	7029.5	425.0	-19.4	-45.4	291.0	19.2	17.9	-6.9	324.1	324.7	0.2	7.8	13.2	84.0
24.7	62.1	7476.8	400.0	-22.5	-44.9	280.2	24.2	23.8	-4.3	325.7	326.3	0.2	10.9	14.7	87.0
26.2	65.6	7949.7	375.0	-24.2	-47.5	281.5	27.6	27.0	-5.5	329.5	330.1	0.1	9.5	17.2	88.0
27.9	69.2	8448.5	350.0	-27.9	-50.9	286.7	31.7	30.4	-9.1	331.1	331.4	0.1	9.0	19.9	91.0
29.6	72.9	8976.6	325.0	-32.2	-50.0	283.7	34.9	33.9	-8.2	332.3	332.7	0.1	14.9	23.5	93.0
31.4	76.9	9535.6	300.0	-37.1	-53.9	277.8	31.7	31.4	-4.3	333.0	333.3	0.1	15.3	27.3	94.0
33.5	81.1	10130.6	275.0	-42.2	99.9	275.3	35.5	35.4	-3.3	334.1	999.9	99.9	999.9	31.3	94.0
35.6	85.5	10768.1	250.0	-47.1	99.9	267.4	30.0	29.9	1.4	336.0	999.9	99.9	999.9	35.4	94.0
37.8	90.2	11458.0	225.0	-52.0	99.9	261.7	25.2	24.9	3.6	338.9	999.9	99.9	999.9	38.7	93.0
39.9	95.4	12211.4	200.0	-57.3	99.9	278.2	33.5	33.2	-4.8	342.0	999.9	99.9	999.9	42.7	93.0
42.8	101.1	13042.3	175.0	-64.2	99.9	274.2	38.4	38.3	-2.8	344.0	999.9	99.9	999.9	48.6	94.0
46.3	107.5	13980.5	150.0	-66.2	99.9	270.2	41.8	41.8	-0.1	356.2	999.9	99.9	999.9	56.6	93.0
50.1	114.3	15094.7	125.0	-63.4	99.9	283.2	43.7	42.6	-10.7	380.2	999.9	99.9	999.9	66.7	93.0
54.9	122.7	16458.0	100.0	-62.6	99.9	282.5	25.7	25.1	-5.6	406.8	999.9	99.9	999.9	77.9	95.0
60.6	131.5	18217.8	75.0	-68.4	99.9	289.7	23.6	22.2	-8.3	429.4	999.9	99.9	999.9	82.9	95.0
68.4	141.0	20720.3	50.0	-56.8	99.9	39.0	2.2	-1.4	-1.7	505.6	999.9	99.9	999.9	82.8	96.0
80.9	150.5	25184.6	25.0	-47.3	99.9	309.7	4.9	3.8	-3.1	649.0	999.9	99.9	999.9	81.2	96.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 240
LAKE CHARLES, LA

6 MAY 1975
1715 GMT

165 21. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.3	5.0	1007.6	27.8	23.4	160.0	7.2	-2.5	6.8	302.8	351.3	18.3	77.0	0.0	0.
0.2	5.0	72.3	1000.0	26.6	22.6	162.6	10.2	-3.0	9.7	302.2	348.8	17.6	78.8	0.3	344.
1.0	6.8	295.9	975.0	24.2	21.0	163.7	8.9	-2.5	8.5	301.7	345.0	16.3	82.4	0.6	343.
1.8	9.0	523.2	950.0	21.8	20.7	165.9	9.4	-2.3	9.1	301.5	344.9	16.4	93.3	1.0	344.
2.5	11.0	755.0	925.0	20.3	19.3	177.1	8.4	-0.4	8.4	302.1	343.2	15.5	94.2	1.5	345.
3.5	13.3	991.3	900.0	18.0	15.7	158.3	7.0	2.2	6.6	301.8	335.6	12.6	86.4	1.8	351.
4.3	15.5	1232.8	875.0	16.9	14.5	211.9	8.8	4.6	7.4	303.0	335.3	12.0	85.6	2.1	356.
5.1	17.7	1480.7	850.0	17.1	13.9	220.4	11.7	7.6	8.9	305.6	338.1	11.9	81.6	2.5	4.
5.8	20.1	1736.4	825.0	18.0	9.9	222.2	14.6	9.8	10.8	308.8	335.1	9.4	59.4	3.0	11.
6.7	22.3	2000.2	800.0	18.1	1.8	231.4	12.1	9.5	7.6	311.2	327.4	5.6	34.3	3.6	17.
7.5	24.6	2270.9	775.0	16.3	-6.6	249.1	10.0	9.3	3.6	311.7	320.9	3.0	20.2	4.0	22.
8.5	27.2	2548.2	750.0	14.0	-9.9	270.5	9.6	9.6	-0.1	312.1	319.5	2.4	18.1	4.4	28.
9.4	29.8	2832.7	725.0	12.1	-11.3	289.6	10.8	10.2	-3.6	313.0	319.9	2.2	18.2	4.6	35.
10.5	32.6	3124.6	700.0	9.1	-11.6	293.4	11.7	10.8	-4.7	312.8	319.8	2.3	21.6	4.7	44.
11.5	35.3	3424.3	675.0	6.5	-13.7	292.0	12.4	11.5	-4.6	313.1	319.3	2.0	21.9	5.1	52.
12.5	38.0	3732.0	650.0	3.5	-16.1	290.1	12.8	12.0	-4.4	313.1	318.4	1.7	22.1	5.5	59.
13.6	40.8	4049.2	625.0	1.5	-19.3	273.8	13.6	13.6	-0.9	314.3	318.6	1.3	19.4	6.1	64.
14.7	43.8	4376.1	600.0	-1.2	-20.5	266.2	16.6	16.5	1.1	314.9	318.9	1.2	21.3	7.0	67.
15.0	46.9	4713.8	575.0	-3.1	-16.7	264.2	20.9	20.8	2.1	316.6	322.3	1.8	34.0	8.2	70.
17.2	50.1	5064.3	550.0	-6.0	-14.2	254.4	24.9	24.0	6.7	317.3	324.5	2.3	52.0	10.1	72.
18.6	53.1	5427.3	525.0	-8.6	-14.7	250.2	27.2	25.6	9.2	318.3	325.7	2.3	61.1	12.2	72.
19.9	56.4	5804.1	500.0	-9.9	-43.4	254.7	24.1	23.2	6.4	321.0	321.6	0.2	4.4	14.4	72.
21.2	60.0	6199.5	475.0	-10.6	-43.8	257.3	19.6	19.1	4.3	324.8	325.4	0.2	4.5	16.1	72.
22.6	63.7	6612.6	450.0	-13.7	-45.4	262.2	15.5	15.4	2.1	325.9	326.5	0.1	4.8	17.5	73.
24.0	67.4	7044.1	425.0	-17.3	-47.4	267.0	17.4	17.4	0.9	326.8	327.2	0.1	5.2	18.8	74.
25.4	71.2	7495.4	400.0	-20.5	-48.4	267.8	19.9	19.9	0.8	328.3	328.7	0.1	6.2	20.4	75.
27.1	75.5	7969.2	375.0	-24.9	-47.5	264.2	23.6	23.5	2.4	328.6	329.2	0.1	10.1	22.5	76.
28.7	79.8	8466.5	350.0	-29.1	-50.5	268.3	24.8	24.8	0.7	329.5	329.9	0.1	10.5	24.8	77.
30.7	84.3	8992.6	325.0	-32.9	-50.0	269.8	28.0	28.0	0.1	331.3	331.7	0.1	16.1	27.8	78.
32.7	89.0	9550.2	300.0	-37.4	-46.3	269.5	32.5	32.5	0.3	332.6	333.4	0.2	38.3	31.4	80.
34.7	94.3	10144.9	275.0	-42.4	99.9	265.3	33.5	33.4	2.8	333.8	999.9	99.9	999.9	35.6	81.
36.9	99.5	10782.4	250.0	-46.8	99.9	262.0	39.6	39.2	5.5	336.5	999.9	99.9	999.9	40.6	81.
39.5	105.3	11472.0	225.0	-52.4	99.9	265.3	44.2	44.0	3.6	338.3	999.9	99.9	999.9	46.7	81.
42.1	111.5	12225.3	200.0	-57.2	99.9	273.9	40.1	40.0	-2.7	342.3	999.9	99.9	999.9	53.6	82.
45.1	118.0	13061.9	175.0	-61.5	99.9	273.5	34.1	34.1	-2.1	348.4	999.9	99.9	999.9	60.5	84.
48.4	125.3	14015.0	150.0	-63.1	99.9	264.2	35.7	35.5	3.6	361.4	999.9	99.9	999.9	67.8	84.
52.3	133.0	15128.9	125.0	-66.0	99.9	273.4	44.0	43.9	-2.6	375.5	999.9	99.9	999.9	77.3	84.
57.3	141.0	15467.5	100.0	-69.8	99.9	277.9	26.1	25.8	-3.6	392.8	999.9	99.9	999.9	82.7	87.
62.8	149.3	18191.4	75.0	-72.2	99.9	273.3	19.6	19.6	-1.1	421.6	999.9	99.9	999.9	93.2	88.
70.5	157.5	20660.8	50.0	-60.4	99.9	73.3	3.5	3.5	-3.4	501.1	999.9	99.9	999.9	94.4	88.
82.9	166.5	25117.7	25.0	-48.5	99.9	5.0	3.1	-0.3	-3.1	645.4	999.9	99.9	999.9	92.9	89.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 248
SHREVEPORT, LA

6 MAY 1975
1736 GMT

160 20. 3

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PQT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.7	79.0	998.6	25.0	21.1	150.0	5.2	-2.6	4.5	300.4	342.7	16.0	79.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.8	6.5	289.9	975.0	23.8	21.6	174.3	5.9	-0.6	5.9	301.4	346.1	16.9	87.4	0.3	347.
1.6	8.6	517.4	950.0	22.1	21.0	195.6	6.8	1.8	6.6	301.9	346.3	16.7	93.3	0.6	357.
2.6	10.6	749.7	925.0	21.0	19.3	211.6	9.7	5.1	8.3	302.8	344.2	15.5	90.4	1.0	9.
3.5	12.8	987.2	900.0	19.7	17.6	212.3	10.5	5.6	8.9	303.8	342.0	14.2	87.3	1.5	18.
4.5	15.1	1230.3	875.0	18.6	14.6	213.7	11.7	6.5	9.7	304.7	337.5	12.1	77.5	2.2	22.
5.6	17.3	1479.5	850.0	17.8	12.6	219.7	9.8	6.3	7.6	306.3	336.3	10.9	71.6	2.9	26.
6.6	19.7	1734.9	825.0	16.5	10.9	225.7	7.8	5.6	5.4	307.4	335.1	10.0	69.4	3.4	29.
7.6	21.8	1956.9	800.0	15.3	8.6	214.3	5.4	3.1	4.5	308.6	333.5	8.9	64.5	3.8	30.
8.8	24.4	2255.7	775.0	13.4	6.6	190.9	2.4	0.5	2.3	309.3	331.9	8.0	63.6	4.1	29.
9.9	26.6	2541.6	750.0	12.8	-1.4	248.4	1.5	1.4	0.6	311.0	324.7	4.6	37.4	4.2	29.
11.1	29.2	2825.0	725.0	10.4	-10.0	319.1	3.0	2.0	-2.3	311.2	318.8	2.5	22.6	4.2	31.
12.2	31.7	3115.9	700.0	8.5	-14.0	334.2	5.3	2.3	-4.8	312.1	317.9	1.8	18.6	4.1	35.
13.6	34.3	3414.9	675.0	5.9	-15.9	331.0	5.9	2.9	-5.2	312.5	317.6	1.6	19.1	3.8	41.
14.9	36.9	3722.2	650.0	3.7	-19.4	305.8	4.0	3.2	-2.3	313.3	317.3	1.3	16.6	3.8	47.
16.2	39.6	4039.6	625.0	1.7	-20.9	274.4	6.2	6.2	-6.5	314.5	318.2	1.2	16.7	3.9	52.
17.6	42.2	4366.7	600.0	-1.2	-22.2	265.1	8.9	8.9	0.8	314.9	318.4	1.1	18.4	4.5	56.
18.7	45.1	4704.1	575.0	-4.2	-22.6	264.5	10.5	10.4	1.0	315.2	318.7	1.1	22.0	5.1	60.
19.9	48.0	5052.6	550.0	-7.2	-24.6	259.2	11.6	11.4	2.2	315.6	318.7	0.9	23.4	5.8	63.
21.2	50.9	5414.0	525.0	-8.8	-28.5	253.7	15.6	15.0	4.4	317.9	320.2	0.7	18.4	6.9	65.
22.6	54.0	5790.7	500.0	-10.3	-30.8	246.5	18.5	17.0	7.4	320.6	322.6	0.6	16.6	8.3	66.
24.2	57.0	6184.5	475.0	-12.0	-33.4	240.2	19.4	16.8	9.6	323.2	324.8	0.5	14.8	10.2	65.
25.7	60.4	6596.6	450.0	-14.3	-35.2	247.0	17.5	16.1	6.8	325.3	326.8	0.4	14.9	11.9	65.
27.3	63.9	7027.8	425.0	-17.2	-36.9	262.4	16.5	16.3	2.2	326.9	328.2	0.4	16.1	13.4	66.
28.9	67.2	7478.8	400.0	-21.2	-39.4	268.6	21.6	21.6	0.5	327.4	328.5	0.3	17.4	15.1	68.
30.5	70.8	7952.1	375.0	-24.9	-40.0	270.7	25.6	25.6	-0.3	328.7	329.8	0.3	22.7	17.2	71.
32.3	74.5	8449.3	350.0	-29.4	-39.7	266.1	28.4	28.4	1.9	329.1	330.4	0.3	35.5	19.9	73.
34.0	78.5	8974.2	325.0	-33.4	-42.4	263.9	37.7	37.5	4.0	330.6	331.6	0.3	39.5	23.1	75.
35.8	82.4	9537.8	300.0	-38.0	-45.8	265.8	32.6	32.5	2.4	331.7	332.5	0.2	43.1	27.0	77.
37.9	86.7	10123.6	275.0	-43.2	99.9	261.8	36.1	35.7	5.2	332.5	999.9	99.9	999.9	31.5	78.
40.3	91.4	10759.3	250.0	-47.8	99.9	263.0	33.9	33.6	4.2	335.0	999.9	99.9	999.9	36.6	78.
42.9	96.3	11447.4	225.0	-51.5	99.9	265.4	36.7	36.5	2.9	339.6	999.9	99.9	999.9	42.0	79.
45.4	101.6	12203.5	200.0	-56.8	99.9	265.7	33.8	33.8	0.2	342.9	999.9	99.9	999.9	47.7	80.
48.1	107.5	13038.9	175.0	-61.5	99.9	264.4	33.5	33.3	3.3	348.4	999.9	99.9	999.9	53.5	81.
51.4	114.0	13955.1	150.0	-61.7	99.9	258.0	31.7	31.0	6.6	363.8	999.9	99.9	999.9	59.9	81.
55.2	121.3	15123.7	125.0	-62.7	99.9	274.7	43.0	42.9	-3.5	381.4	999.9	99.9	999.9	69.1	81.
59.7	129.7	16479.2	100.0	-65.7	99.9	272.0	35.9	35.8	-1.3	400.6	999.9	99.9	999.9	78.6	83.
65.5	139.0	19229.2	75.0	-65.0	99.9	349.4	6.8	1.3	-6.7	436.6	999.9	99.9	999.9	85.4	85.
73.4	149.3	20734.2	50.0	-58.0	99.9	300.6	5.5	4.7	-2.8	506.9	999.9	99.9	999.9	84.9	85.
86.0	160.7	25206.7	25.0	-49.2	99.9	271.0	10.1	10.1	-0.2	643.7	999.9	99.9	999.9	82.5	85.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 250
BROWNSVILLE, TEX

6 MAY 1975
1800 GMT

157 17. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.5	7.0	1003.2	31.1	23.5	170.0	7.2	-1.3	7.1	36.5	356.3	18.5	64.0	0.0	0.
0.1	4.8	35.7	1000.0	29.7	22.5	999.9	99.9	99.9	99.9	365.2	352.3	17.5	65.7	999.9	999.
1.0	5.5	261.3	975.0	26.7	22.9	999.9	99.9	99.9	99.9	304.5	353.7	18.4	80.0	999.9	999.
1.8	6.6	491.0	950.0	24.3	22.0	999.9	99.9	99.9	99.9	304.3	351.8	17.8	86.9	999.9	999.
2.8	10.6	725.2	925.0	22.6	21.2	999.9	99.9	99.9	99.9	304.8	351.4	17.4	91.4	999.9	999.
3.7	12.6	964.2	900.0	20.9	18.2	999.9	99.9	99.9	99.9	305.0	345.4	15.0	85.3	999.9	999.
4.5	14.7	1210.6	875.0	25.4	11.6	999.9	99.9	99.9	99.9	311.6	339.5	9.9	42.0	999.9	999.
5.4	16.7	1464.7	850.0	23.6	9.0	999.9	99.9	99.9	99.9	312.1	336.3	8.5	39.2	999.9	999.
6.3	18.9	1724.8	825.0	22.5	5.8	999.9	99.9	99.9	99.9	313.3	333.7	7.0	33.8	999.9	999.
7.1	21.0	1991.6	800.0	21.4	2.1	999.9	99.9	99.9	99.9	314.7	331.2	5.6	27.9	999.9	999.
8.0	23.3	2265.6	775.0	19.4	-2.2	999.9	99.9	99.9	99.9	315.3	328.0	4.2	23.1	999.9	999.
9.3	25.5	2546.6	750.0	17.8	-3.5	999.9	99.9	99.9	99.9	316.4	328.4	3.9	23.2	999.9	999.
10.0	27.9	2835.1	725.0	15.8	-5.1	999.9	99.9	99.9	99.9	317.2	328.3	3.6	23.3	999.9	999.
11.0	30.2	3131.6	700.0	13.3	-3.9	999.9	99.9	99.9	99.9	317.8	330.4	4.1	30.1	999.9	999.
12.0	32.7	3436.2	675.0	10.8	-4.0	206.8	13.5	6.1	12.0	318.2	331.1	4.2	35.1	6.9	28.
13.0	35.1	3749.2	650.0	8.0	-7.0	208.6	13.2	6.3	11.6	318.5	329.2	3.5	33.5	7.7	28.
14.1	37.7	4071.1	625.0	5.3	-12.3	211.9	12.6	6.6	10.7	318.8	326.4	2.4	27.0	8.5	28.
15.2	40.3	4403.4	600.0	3.1	-15.5	218.9	13.2	8.3	10.3	319.9	326.0	1.9	24.0	9.4	29.
16.4	42.9	4745.9	575.0	0.1	-17.8	222.7	14.5	9.8	10.6	320.3	325.6	1.6	24.3	12.3	30.
17.5	45.9	5099.6	550.0	-3.4	-22.8	227.5	14.6	10.7	9.8	320.1	323.8	1.1	20.6	11.4	31.
18.8	48.8	5465.5	525.0	-6.5	-25.2	240.1	14.2	12.3	7.1	320.7	323.9	0.9	20.8	12.4	33.
20.1	51.6	5844.6	500.0	-9.5	-19.6	252.0	15.8	15.0	4.9	321.6	326.9	1.6	43.9	13.3	36.
21.2	54.6	6238.6	475.0	-12.3	-30.6	255.9	18.1	17.5	4.4	322.8	325.0	0.6	19.9	14.2	39.
22.5	57.6	6650.7	450.0	-13.6	-32.7	254.0	20.7	19.9	5.7	326.2	328.1	0.5	18.1	15.5	42.
24.0	61.0	7083.0	425.0	-16.7	-35.6	244.1	21.0	18.9	9.2	327.6	329.1	0.4	17.5	17.0	45.
25.5	64.4	7535.6	400.0	-20.3	-38.8	246.2	20.1	18.4	8.1	328.5	329.7	0.3	17.3	19.0	47.
27.2	67.9	8010.8	375.0	-23.1	-41.8	248.8	22.0	20.5	8.0	330.9	331.9	0.3	16.2	20.8	49.
28.7	71.3	8513.9	350.0	-26.1	-42.2	243.6	25.5	22.8	11.3	333.5	334.5	0.3	20.1	23.0	51.
30.3	75.2	9045.1	325.0	-30.8	-45.2	245.9	27.0	24.7	11.0	334.2	335.0	0.2	22.6	25.4	52.
32.0	79.5	9608.3	300.0	-35.3	-49.2	247.3	31.0	28.6	12.0	335.5	336.0	0.1	22.3	28.3	54.
33.7	83.5	10208.4	275.0	-40.1	99.9	243.9	32.2	29.0	14.2	337.1	999.9	99.9	999.9	31.4	55.
35.8	88.0	10850.1	250.0	-46.0	99.9	245.7	31.8	29.0	13.1	337.7	999.9	99.9	999.9	35.3	56.
38.1	93.0	11542.1	225.0	-51.9	99.9	249.3	38.3	35.9	13.5	338.9	999.9	99.9	999.9	40.5	57.
40.8	98.0	12256.0	200.0	-57.7	99.9	255.9	42.6	41.3	10.4	341.4	999.9	99.9	999.9	46.4	60.
43.8	103.8	13132.6	175.0	-59.7	99.9	260.8	41.9	41.4	6.7	351.3	999.9	99.9	999.9	53.7	62.
47.0	110.2	14087.8	150.0	-63.2	99.9	254.9	39.2	37.9	10.2	361.2	999.9	99.9	999.9	60.6	64.
51.0	117.0	15195.3	125.0	-67.5	99.9	261.9	35.0	34.6	4.9	372.8	999.9	99.9	999.9	68.4	66.
55.2	125.3	16528.0	100.0	-71.9	99.9	267.1	16.5	16.4	0.8	388.9	999.9	99.9	999.9	73.6	67.
60.6	135.0	18191.2	75.0	-77.8	99.9	289.0	12.0	11.3	-3.9	409.8	999.9	99.9	999.9	76.6	69.
68.3	145.0	20674.7	50.0	-60.7	99.9	54.7	5.2	-4.3	-3.0	500.4	999.9	99.9	999.9	75.9	69.
81.0	156.5	25136.6	25.0	-49.0	99.9	68.8	5.7	-5.3	-2.1	644.2	999.9	99.9	999.9	73.1	69.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 255
VICTORIA, TEX

6 MAY 1975
1715 GMT

160 13. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCHF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.0	33.0	1000.8	28.3	22.3	180.0	5.2	0.0	5.2	303.7	349.7	17.2	70.0	0.0	0.
0.0	5.0	40.2	1000.0	28.2	22.3	179.7	5.1	-0.0	5.1	303.7	349.6	17.2	70.1	0.0	0.
0.6	6.8	265.2	975.0	26.0	21.3	175.1	4.0	-0.3	4.0	303.6	347.9	16.6	75.4	0.2	1.
1.1	8.9	494.2	950.0	23.8	21.2	184.3	4.2	0.3	4.2	303.6	348.9	17.0	85.6	0.3	0.
1.7	10.7	727.4	925.0	21.1	20.0	191.6	5.5	1.1	5.4	303.1	346.2	16.2	93.3	0.5	3.
2.4	12.7	965.2	900.0	19.8	18.7	188.0	7.5	1.0	7.4	304.0	345.1	15.3	93.3	0.7	6.
3.3	14.9	1209.4	875.0	18.9	15.9	174.6	9.1	-0.9	9.0	305.2	341.0	13.2	82.7	1.2	5.
4.0	16.9	1460.5	850.0	23.8	3.6	162.3	9.1	-2.8	8.7	311.0	328.9	5.8	26.8	1.6	0.
4.9	19.1	1720.4	825.0	22.5	2.0	152.1	8.4	-3.9	7.4	313.1	328.9	5.4	25.8	2.0	356.
5.7	21.1	1986.9	800.0	20.9	-7.0	146.6	9.0	-5.0	7.5	313.8	322.5	2.8	14.6	2.4	351.
6.6	23.3	2260.0	775.0	18.9	-7.5	154.3	6.9	-3.0	6.2	314.6	323.2	2.8	15.9	2.8	347.
7.6	25.6	2540.1	750.0	16.6	-8.6	167.8	5.2	-1.1	5.1	314.6	323.2	2.7	17.0	3.2	347.
8.6	27.9	2926.8	725.0	14.1	-6.8	169.8	4.7	-0.8	4.6	315.3	325.1	3.2	22.9	3.4	347.
9.5	30.3	3121.1	700.0	11.1	-5.2	183.0	4.7	0.2	4.7	315.3	326.5	3.7	31.2	3.7	347.
10.7	32.9	3423.4	675.0	9.1	-12.1	210.0	5.4	2.7	4.7	316.1	323.2	2.3	21.1	4.1	350.
11.7	35.4	3734.4	650.0	6.3	-13.4	218.4	6.2	3.9	4.9	316.4	322.9	2.1	22.7	4.3	354.
12.8	38.0	4054.1	625.0	3.5	-14.5	215.3	8.1	4.7	6.6	316.7	323.0	2.0	25.2	4.6	358.
13.9	40.5	4383.9	600.0	0.5	-9.6	208.0	11.3	5.3	9.9	317.1	326.6	3.1	46.6	5.2	2.
15.1	43.2	4723.6	575.0	-2.6	-5.7	208.6	13.1	6.3	11.5	317.5	330.7	4.3	79.1	5.9	5.
16.2	46.1	5074.8	550.0	-5.4	-10.2	214.2	15.1	8.5	12.5	318.0	328.0	3.2	69.2	6.8	8.
17.4	49.1	5438.2	525.0	-8.4	-15.3	222.1	18.5	12.4	13.7	318.6	325.6	2.2	57.6	7.9	13.
18.7	52.0	5815.0	500.0	-10.9	-34.6	236.3	20.7	17.3	11.5	319.7	321.1	0.4	12.1	9.2	18.
20.0	55.0	6207.7	475.0	-12.6	-38.8	241.5	21.9	19.2	10.4	322.3	323.3	0.3	9.0	10.4	25.
21.5	58.1	6618.3	450.0	-15.3	-38.6	244.0	21.2	19.1	9.3	324.0	325.1	0.3	11.5	12.0	30.
22.8	61.5	7048.0	425.0	-18.0	-40.5	245.9	22.6	20.6	9.2	325.9	326.9	0.3	11.7	13.6	35.
24.4	65.0	7498.3	400.0	-21.0	-42.7	242.4	25.0	22.1	11.6	327.7	328.5	0.2	12.0	15.5	38.
26.1	68.4	7972.1	375.0	-24.3	-45.2	251.9	26.5	25.1	8.2	329.4	330.0	0.2	12.4	17.9	43.
27.9	72.0	8470.5	350.0	-28.4	-48.2	257.8	27.3	26.7	5.8	330.4	330.9	0.1	12.8	20.4	47.
29.9	76.0	8996.9	325.0	-32.4	-51.3	256.5	32.8	31.9	7.6	331.9	332.3	0.1	13.2	23.4	52.
31.9	80.3	9557.3	300.0	-36.5	-54.4	250.3	37.3	35.1	12.6	333.8	334.1	0.1	13.6	27.5	55.
34.0	84.4	10154.6	275.0	-40.8	99.9	254.5	36.1	34.8	9.6	336.1	999.9	99.9	999.9	31.6	57.
36.1	89.0	10794.8	250.0	-46.4	99.9	255.0	41.4	39.9	10.7	337.1	999.9	99.9	999.9	36.5	60.
38.5	94.2	11484.7	225.0	-52.4	99.9	260.0	41.5	40.9	7.2	338.3	999.9	99.9	999.9	42.1	62.
41.1	99.5	12238.0	200.0	-56.3	99.9	257.9	46.5	45.5	5.8	343.6	999.9	99.9	999.9	49.2	65.
44.2	105.3	13079.1	175.0	-59.9	99.9	255.5	45.3	43.8	11.3	351.1	999.9	99.9	999.9	57.7	66.
47.9	112.0	14036.3	150.0	-61.4	99.9	252.9	35.3	33.7	10.4	364.3	999.9	99.9	999.9	66.5	67.
51.8	119.3	15154.3	125.0	-66.2	99.9	265.8	39.2	39.1	2.8	375.2	999.9	99.9	999.9	75.6	68.
56.9	126.0	16501.5	100.0	-68.9	99.9	278.5	24.2	23.9	-3.6	394.7	999.9	99.9	999.9	84.0	71.
62.8	137.5	18195.5	75.0	-74.7	99.9	295.9	8.9	8.0	-3.9	416.2	999.9	99.9	999.9	89.8	73.
71.2	147.5	20666.0	50.0	-60.2	99.9	327.3	3.5	1.9	-3.0	501.8	999.9	99.9	999.9	88.7	73.
85.0	158.5	25121.8	25.0	-49.5	99.9	356.4	1.0	0.1	-1.0	642.5	999.9	99.9	999.9	88.1	74.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 260
STEPHENVILLE, TEX

6 MAY 1975
1715 GMT

161 21. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SFC	V COMP M/SFC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.2	399.0	960.5	26.0	15.1	310.0	5.2	4.0	-3.3	304.2	235.0	11.3	51.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.3	10.0	495.7	950.0	24.5	15.3	312.5	5.9	4.4	-4.0	303.6	235.1	11.6	56.7	0.2	130.
1.1	12.5	728.3	925.0	21.2	13.3	319.0	6.4	4.2	-4.8	302.4	230.8	10.5	60.8	0.4	132.
1.9	14.9	965.0	900.0	18.9	11.9	332.0	6.2	2.9	-5.5	302.4	229.0	9.8	63.5	0.7	138.
2.7	17.1	1206.9	875.0	17.6	8.3	320.8	5.4	3.4	-4.2	303.1	225.0	7.9	54.7	1.0	142.
3.7	19.6	1455.0	850.0	18.2	4.8	281.4	7.2	7.1	-1.4	306.1	224.1	6.4	41.1	1.3	138.
4.5	21.9	1710.3	825.0	17.4	7.5	254.7	10.3	9.9	2.7	308.1	233.5	8.0	52.3	1.6	125.
5.3	24.4	1972.6	800.0	15.3	7.7	244.0	10.7	9.6	4.7	308.6	231.9	8.3	60.5	1.9	111.
6.3	26.9	2240.9	775.0	12.9	5.8	242.5	11.3	10.0	5.2	308.6	229.9	7.5	62.2	2.4	101.
7.2	29.6	2516.3	750.0	11.5	4.6	230.5	13.1	10.1	8.4	310.0	230.3	7.1	62.5	2.9	92.
8.2	32.3	2799.3	725.0	9.8	3.0	221.2	15.4	10.1	11.6	311.1	230.1	6.6	62.8	3.6	81.
9.0	35.1	3089.9	700.0	7.5	-0.5	214.1	15.9	8.9	13.1	311.5	226.9	5.3	56.7	4.2	74.
10.0	37.8	3388.8	675.0	6.0	-9.1	204.9	15.8	6.7	14.4	312.7	221.5	2.9	33.4	4.9	66.
11.0	40.6	3697.1	650.0	4.1	-12.6	201.6	16.1	5.9	15.0	313.9	220.8	2.2	28.3	5.7	59.
12.1	43.4	4014.5	625.0	1.4	-13.8	205.4	17.0	7.3	15.3	314.3	220.9	2.1	31.1	6.5	54.
13.1	46.5	4341.4	600.0	-1.8	-14.5	211.6	18.4	9.6	15.6	314.3	220.8	2.1	36.9	7.5	50.
14.2	49.6	4678.3	575.0	-4.8	-14.7	217.6	19.9	12.1	15.8	314.6	221.2	2.1	45.5	8.7	48.
15.2	52.6	5026.4	550.0	-7.7	-15.6	222.9	21.9	14.9	16.0	315.2	221.7	2.1	53.1	10.0	47.
16.3	55.7	5386.5	525.0	-10.6	-20.4	223.1	22.6	15.4	16.5	315.9	220.5	1.4	44.3	11.5	47.
17.4	59.0	5760.6	500.0	-12.3	-33.8	219.3	19.8	12.6	15.4	316.1	219.6	0.4	14.5	12.9	46.
18.7	62.6	6151.2	475.0	-14.8	-37.2	220.9	20.1	13.2	15.2	319.7	220.8	0.3	12.7	14.4	45.
20.0	65.9	6557.9	450.0	-17.9	-39.5	220.8	22.4	14.6	17.0	320.7	221.6	0.3	13.1	16.1	45.
21.4	69.6	6982.4	425.0	-21.5	-39.7	224.4	22.8	16.0	16.3	321.4	222.4	0.3	17.5	17.9	45.
22.7	73.2	7426.4	400.0	-24.1	-38.4	238.0	22.5	19.1	11.9	323.7	224.9	0.3	25.4	19.7	45.
24.2	77.2	7894.0	375.0	-27.5	-45.3	248.7	29.6	27.6	10.7	325.1	225.8	0.2	16.5	21.8	47.
25.7	81.2	8387.6	350.0	-30.3	-47.2	249.1	39.6	37.0	14.1	327.8	228.4	0.1	17.2	24.9	50.
27.3	85.4	8910.7	325.0	-34.4	-44.9	250.7	45.0	42.5	14.9	329.2	230.0	0.2	33.4	28.6	53.
29.2	90.0	9464.8	300.0	-39.2	-48.8	244.0	47.4	42.6	20.8	330.1	230.6	0.1	34.6	33.7	55.
31.0	94.8	10055.8	275.0	-43.9	99.9	242.2	51.6	45.7	24.1	331.7	999.9	99.9	999.9	38.9	56.
33.1	99.6	10688.4	250.0	-48.3	99.9	246.5	41.6	38.1	16.6	334.2	999.9	99.9	999.9	44.7	57.
35.4	105.0	11376.3	225.0	-51.7	99.9	251.6	45.0	42.7	14.2	339.3	999.9	99.9	999.9	50.2	58.
37.7	110.6	12132.5	200.0	-56.7	99.9	248.8	52.1	48.6	18.9	343.0	999.9	99.9	999.9	57.2	60.
40.6	116.8	12970.9	175.0	-60.3	99.9	253.7	35.9	34.5	10.1	350.4	999.9	99.9	999.9	65.2	61.
43.9	123.7	13933.9	150.0	-59.7	99.9	256.5	37.5	36.5	8.7	367.2	999.9	99.9	999.9	73.2	62.
47.8	131.0	15074.0	125.0	-60.7	99.9	257.9	54.5*	53.3	11.4	385.2	999.9	99.9	999.9	83.7	64.
52.3	139.0	16459.3	100.0	-63.4	99.9	264.1	25.1*	25.0	2.6	405.3	999.9	99.9	999.9	92.6	66.
57.7	147.3	18187.9	75.0	-68.5	99.9	254.8	14.9*	14.4	3.9	429.3	999.9	99.9	999.9	97.9	67.
65.2	157.0	20682.1	50.0	-61.0	99.9	238.7	13.2	11.3	6.9	499.7	999.9	99.9	999.9	97.2	66.
77.1	167.5	25124.8	25.0	-49.9	99.9	234.1	2.5	2.1	1.5	641.5	999.9	99.9	999.9	94.6	57.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 261
DEL RIC. TEX

6 MAY 1975
1715 GMT

162 20. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	8.9	314.0	969.4	29.2	19.2	350.0	7.7	1.3	-7.6	307.1	347.0	14.7	55.0	0.7	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.7	10.5	494.1	950.0	27.2	15.4	318.8	14.7	9.7	-11.1	306.4	338.4	11.7	48.4	0.4	177.
1.3	12.7	729.1	925.0	24.4	15.9	323.3	9.5	5.7	-7.7	306.0	339.9	12.4	59.1	0.8	156.
2.2	15.1	568.6	900.0	21.7	16.7	328.3	7.1	3.7	-6.0	305.7	342.2	13.4	73.1	1.3	152.
3.4	17.3	1212.9	875.0	19.4	15.7	337.8	6.4	2.4	-6.7	305.7	341.0	12.9	78.7	1.7	153.
4.3	19.7	1462.2	850.0	16.9	13.9	320.1	5.9	3.8	-4.5	305.4	337.8	11.9	82.7	2.0	153.
5.2	22.0	1716.7	825.0	15.4	8.6	302.0	8.0	6.8	-4.2	306.0	329.8	8.5	63.8	2.4	150.
6.1	24.5	1977.5	800.0	14.2	5.4	285.9	8.8	8.4	-2.4	306.9	321.2	5.0	39.0	2.8	144.
7.1	26.8	2245.0	775.0	13.4	-9.8	274.2	6.1	6.1	-0.4	308.5	315.6	2.3	18.9	3.2	138.
8.2	29.4	2519.9	750.0	12.3	-10.7	233.6	5.3	4.2	3.1	310.2	317.1	2.3	19.0	3.3	133.
9.3	32.1	2802.8	725.0	10.4	-10.7	219.3	6.0	3.8	4.7	311.1	318.3	2.3	21.5	3.3	126.
10.4	34.9	3093.3	700.0	8.2	-12.5	216.3	9.0	5.3	7.3	311.8	318.3	2.1	21.6	3.4	119.
11.4	37.4	3392.7	675.0	6.4	-12.2	211.2	12.1	6.3	10.4	313.1	320.0	2.2	25.0	3.5	118.
12.4	40.2	3701.6	650.0	3.5	-11.7	205.0	13.7	5.8	12.4	313.2	320.6	2.4	31.7	3.7	96.
13.4	43.0	4017.0	625.0	0.6	-15.7	207.8	14.4	6.7	12.7	313.3	319.0	1.8	28.3	4.1	84.
14.5	46.0	4343.4	600.0	-1.5	-21.8	218.0	15.9	9.8	12.5	314.5	318.1	1.1	19.5	4.7	75.
15.7	49.0	4681.6	575.0	-2.9	-25.3	220.7	17.4	11.4	13.2	316.7	319.5	0.8	15.7	5.8	68.
17.0	52.0	5032.3	550.0	-4.8	-28.2	229.7	18.6	14.2	12.0	318.5	320.8	0.7	13.9	7.1	63.
18.5	55.2	5396.9	525.0	-7.0	-29.9	230.0	20.1	15.4	12.9	320.0	322.1	0.6	14.1	8.8	61.
20.0	58.4	5775.8	500.0	-9.3	-31.5	231.7	19.8	15.6	12.3	321.8	323.7	0.5	14.3	10.6	59.
21.6	61.9	6170.0	475.0	-12.5	-34.0	237.8	21.6	18.2	11.5	322.5	324.1	0.4	14.6	12.6	58.
23.2	65.3	6580.9	450.0	-15.3	-36.1	242.3	21.9	19.4	10.2	324.0	325.3	0.4	14.8	14.7	59.
24.9	68.9	7009.6	425.0	-18.8	-37.6	248.0	24.4	22.6	9.2	324.9	326.2	0.3	17.1	17.0	60.
26.9	72.5	7459.3	400.0	-21.5	-39.7	242.3	28.5	25.2	13.2	327.0	328.1	0.3	17.3	20.1	61.
28.8	76.5	7932.3	375.0	-24.7	-41.8	243.6	32.3	29.0	14.4	328.9	329.8	0.3	18.5	23.5	61.
30.6	80.6	8430.6	350.0	-28.8	-40.5	245.7	33.9	30.9	14.0	329.8	331.0	0.3	31.3	27.0	61.
32.3	84.8	8956.3	325.0	-33.2	-41.7	246.3	35.9	32.8	14.4	330.8	331.9	0.3	42.0	30.7	62.
34.4	89.2	9513.2	300.0	-37.8	-43.8	243.9	40.3	36.2	17.7	332.1	333.0	0.3	52.9	35.4	62.
36.6	94.0	10106.8	275.0	-42.7	-47.0	239.2	43.2	37.1	22.1	333.4	334.9	99.9	999.9	40.9	62.
38.9	99.0	11744.5	250.0	-47.0	-49.9	237.0	47.2	39.6	25.7	336.2	337.9	99.9	999.9	47.2	62.
41.2	104.3	11434.8	225.0	-51.8	-49.9	245.1	43.6	39.5	18.3	339.1	339.9	99.9	999.9	53.2	61.
43.8	110.0	12189.4	200.0	-57.0	-49.9	247.3	47.1	43.4	18.2	342.5	342.5	99.9	999.9	60.7	62.
46.5	116.0	13028.1	175.0	-59.5	-49.9	250.4	42.6	40.1	14.3	351.7	351.7	99.9	999.9	67.8	63.
49.8	123.0	13947.3	150.0	-57.5	-49.9	251.1	44.6*	42.2	14.4	371.1	371.1	99.9	999.9	76.8	64.
53.4	130.3	15136.0	125.0	-61.9	-49.9	256.0	41.4*	40.2	10.0	383.0	383.0	99.9	999.9	86.0	64.
57.6	138.5	16497.4	100.0	-67.0	-49.9	250.2	17.8*	16.7	6.0	398.4	398.4	99.9	999.9	93.0	66.
62.5	147.0	18195.3	75.0	-73.3	-49.9	262.5	6.8*	6.7	0.9	419.2	419.2	99.9	999.9	97.8	66.
69.4	156.5	20672.1	50.0	-60.1	-49.9	322.2	0.6	0.5	-0.6	501.9	501.9	99.9	999.9	98.8	65.
81.1	167.0	25112.3	25.0	-50.4	-49.9	63.5	0.7	-0.6	-0.3	639.8	639.8	99.9	999.9	97.4	66.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 265
MIDLAND, TEX

6 MAY 1975
1720 GMT

153 18. C

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U CCMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	11.9	873.0	910.9	21.2	-5.6	280.0	7.7	7.6	-1.3	302.7	310.8	2.0	16.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.3	12.8	976.6	900.0	19.1	-4.3	284.8	6.3	6.1	-1.6	301.6	310.6	3.1	20.1	0.3	124.
1.2	15.1	1217.2	875.0	16.9	-5.6	291.9	5.9	5.5	-2.2	301.7	310.1	2.9	20.9	0.5	116.
2.4	17.2	1462.8	850.0	14.3	-6.8	294.5	6.7	6.1	-2.8	301.5	309.4	2.7	22.5	0.9	117.
2.9	19.5	1713.5	825.0	11.9	-8.0	282.8	8.0	7.8	-1.8	301.5	309.0	2.5	24.1	1.2	116.
3.6	21.6	1969.7	800.0	9.4	-8.9	260.5	8.9	8.8	1.5	301.5	308.6	2.4	26.5	1.5	110.
4.5	24.0	2232.5	775.0	9.1	-9.1	240.9	12.7	11.1	6.2	304.0	311.3	2.5	26.6	2.0	99.
5.6	26.3	2503.8	750.0	8.2	-8.5	226.1	14.6	10.5	10.1	305.9	313.9	2.7	29.5	2.6	85.
6.7	28.9	2782.4	725.0	5.6	-9.1	230.6	16.0	12.3	10.1	305.9	313.8	2.7	33.9	3.5	75.
7.5	31.4	3068.2	700.0	3.6	-12.9	238.0	18.3	15.6	9.7	306.7	312.9	2.0	28.7	4.3	71.
8.5	34.1	3362.4	675.0	1.8	-16.2	239.5	19.7	17.0	10.0	307.9	312.8	1.6	24.8	5.5	69.
9.6	36.7	3655.2	650.0	-0.6	-17.5	235.6	19.6	16.2	11.1	308.4	313.0	1.5	26.5	6.7	67.
10.7	39.4	3977.7	625.0	-2.1	-21.4	231.9	20.1	15.8	12.4	310.2	313.8	1.1	21.1	7.9	65.
11.8	42.0	4301.0	600.0	-3.6	-23.2	227.8	17.3	12.8	11.0	312.0	315.2	1.0	20.2	9.3	62.
12.9	44.9	4635.8	575.0	-5.8	-27.2	229.5	19.1	14.5	12.4	313.2	315.6	0.7	16.5	10.3	61.
13.9	47.9	4982.5	550.0	-8.0	-28.9	230.6	19.0	14.6	12.0	314.6	316.8	0.6	16.7	11.5	60.
15.0	50.9	5342.0	525.0	-10.5	-30.8	235.9	20.0	16.5	11.2	315.8	317.7	0.6	16.9	12.8	59.
16.2	54.0	5715.9	500.0	-12.8	-32.7	236.1	23.2	19.2	12.9	317.4	319.1	0.5	17.0	14.3	59.
17.7	57.1	6104.8	475.0	-15.9	-34.3	230.3	24.1	18.6	15.4	318.3	319.8	0.4	18.7	16.4	58.
19.1	60.6	6509.8	450.0	-19.3	-37.2	234.4	26.9	21.9	15.6	319.0	320.2	0.3	18.7	18.5	57.
20.6	64.1	6932.6	425.0	-21.7	-40.5	238.4	28.4	24.2	14.9	321.2	322.1	0.3	16.2	21.0	57.
22.1	67.6	7378.2	400.0	-23.0	-41.8	242.5	35.7	31.7	16.5	325.1	325.9	0.2	15.9	23.8	55.
23.6	71.2	7848.5	375.0	-25.5	-43.8	239.4	40.4	34.8	20.6	327.8	328.5	0.2	16.1	27.3	58.
25.1	75.2	8344.9	350.0	-29.6	-47.0	237.3	44.0	37.0	23.7	328.7	329.3	0.2	16.5	31.1	58.
26.7	79.3	8868.1	325.0	-34.7	-51.0	237.1	42.6	35.7	23.1	328.8	329.2	0.1	16.9	35.3	58.
28.5	83.6	9421.6	300.0	-39.6	99.9	237.5	43.9	37.0	23.6	329.5	999.9	99.9	999.9	40.2	58.
30.5	88.0	10010.3	275.0	-44.4	99.9	239.1	41.5	35.6	21.3	330.9	999.9	99.9	999.9	44.8	58.
32.5	93.0	10643.7	250.0	-48.2	99.9	238.1	48.6	41.3	25.7	334.4	999.9	99.9	999.9	50.6	58.
34.6	98.0	11331.8	225.0	-52.0	99.9	241.8	47.4*	41.8	22.4	338.8	999.9	99.9	999.9	56.7	58.
37.0	103.6	12086.6	200.0	-56.2	99.9	238.4	45.7*	38.9	23.9	343.8	999.9	99.9	999.9	63.0	58.
39.6	110.0	12930.2	175.0	-58.3	99.9	241.8	42.6*	37.5	20.2	353.7	999.9	99.9	999.9	69.8	58.
42.7	116.5	13898.7	150.0	-58.8	99.9	245.4	51.4*	46.8	21.4	368.8	999.9	99.9	999.9	77.6	59.
46.2	124.3	15046.4	125.0	-59.7	99.9	256.7	48.5*	47.2	11.2	386.9	999.9	99.9	999.9	87.5	61.
50.3	132.5	16430.3	100.0	-62.4	99.9	251.3	20.3*	19.2	6.5	407.2	999.9	99.9	999.9	95.1	62.
55.4	141.3	18175.1	75.0	-67.9	99.9	220.0	16.3*	10.5	12.5	430.5	999.9	99.9	999.9	100.9	62.
63.2	150.5	20686.2	50.0	-56.8	99.9	41.7	2.9	-2.9	0.1	569.6	999.9	99.9	999.9	100.0	61.
75.4	160.0	25140.9	25.0	-49.9	99.9	999.9	99.9	99.9	99.9	641.3	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 270
EL PASO, TEX.

6 MAY 1975
1800 GMT

146 19. C

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	16.4	1193.0	878.5	16.5	-12.0	235.0	5.2	4.3	3.0	300.8	306.0	1.7	13.0	30.0	30.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.1	16.8	1226.8	875.0	15.2	-10.3	259.9	5.8	5.8	1.0	299.8	305.7	2.0	16.4	30.1	39.
0.7	19.2	1470.5	850.0	12.0	-10.8	267.3	6.3	6.3	0.3	299.0	304.8	2.0	19.1	0.3	71.
1.4	21.4	1719.1	825.0	9.4	-11.7	262.8	5.1	5.1	0.6	298.8	304.4	1.9	21.1	0.5	76.
1.9	23.9	1972.8	800.0	6.8	-12.7	267.9	4.3	4.2	0.2	298.6	303.9	1.8	23.2	0.6	79.
2.5	26.2	2232.4	775.0	4.4	-13.4	260.7	4.0	4.0	0.6	298.7	303.9	1.7	26.0	0.8	80.
3.2	28.8	2498.0	750.0	1.7	-12.3	252.2	9.4	8.9	2.9	298.6	304.5	2.0	34.6	1.0	79.
4.1	31.3	2770.1	725.0	-0.6	-11.6	245.6	14.7	13.4	6.1	299.1	305.5	2.2	43.1	1.7	75.
5.2	34.0	3049.7	700.0	-2.2	-9.6	236.1	17.8	14.7	9.9	300.4	308.1	2.6	56.8	2.7	69.
6.6	36.6	3338.0	675.0	-3.5	-13.2	247.9	25.6	23.7	9.6	302.0	308.2	2.1	47.5	4.6	67.
8.0	39.3	3637.1	650.0	-2.4	-28.0	252.1	26.9	25.6	8.3	306.3	308.2	0.6	11.9	6.9	58.
8.9	41.9	3947.4	625.0	-3.8	-29.0	258.0	23.8	23.3	4.9	308.2	310.0	0.6	12.0	8.2	69.
9.8	44.8	4268.7	600.0	-5.6	-30.3	260.9	21.2	21.0	3.4	309.6	311.3	0.5	12.1	9.4	71.
10.9	47.8	4600.9	575.0	-7.6	-31.8	259.0	22.0	21.6	4.2	311.1	312.6	0.5	12.3	10.7	72.
12.2	50.6	4945.8	550.0	-9.3	-33.0	255.7	24.9	24.1	6.1	313.0	314.5	0.4	12.4	12.5	73.
13.5	53.5	5304.2	525.0	-11.2	-34.4	255.3	27.4	26.5	6.9	314.5	316.3	0.4	12.6	14.6	73.
14.7	56.4	5676.9	500.0	-13.4	-36.0	252.7	28.3	27.0	8.4	316.7	317.9	0.3	12.8	16.7	73.
15.9	59.6	6065.3	475.0	-16.2	-38.1	246.0	27.4	25.0	11.1	317.9	318.9	0.3	13.0	18.7	73.
17.2	63.1	6469.9	450.0	-18.5	-39.8	241.3	29.0	25.5	14.0	319.9	320.9	0.3	13.2	20.8	72.
18.4	66.3	6893.9	425.0	-21.2	-41.9	237.7	31.6	26.7	16.9	321.7	322.5	0.2	13.5	23.1	70.
20.0	70.0	7339.0	400.0	-24.7	-44.5	242.4	32.4	28.7	15.0	322.9	323.6	0.2	13.8	25.9	69.
21.6	73.4	7804.8	375.0	-28.3	-45.5	239.8	36.1	31.2	18.2	324.0	324.7	0.2	17.4	29.2	68.
23.1	77.0	8295.2	350.0	-32.4	-48.7	235.5	31.2	25.7	17.7	325.0	325.5	0.1	17.7	32.4	67.
24.9	80.9	8812.3	325.0	-37.4	-52.8	238.7	34.6	29.6	18.0	325.1	325.4	0.1	18.0	35.9	66.
26.9	85.1	9358.9	300.0	-42.2	-59.9	238.0	32.6	27.6	17.3	325.9	999.9	99.9	999.9	39.5	66.
28.9	89.4	9942.3	275.0	-46.3	-66.3	236.7	38.1	31.9	20.9	328.2	999.9	99.9	999.9	43.8	65.
31.0	94.2	10572.0	250.0	-49.0	-72.9	237.0	51.2	43.0	27.9	333.3	999.9	99.9	999.9	49.5	64.
33.3	99.0	11257.6	225.0	-52.9	-79.9	241.5	48.5*	42.6	23.1	337.4	999.9	99.9	999.9	56.5	63.
35.9	104.3	12012.0	200.0	-55.8	-86.9	235.1	50.1*	41.1	28.6	344.4	999.9	99.9	999.9	63.9	63.
39.7	110.2	12862.0	175.0	-56.5	-89.9	237.8	51.7*	43.7	27.5	356.6	999.9	99.9	999.9	72.1	62.
42.3	116.3	13843.3	150.0	-54.8	-89.9	238.8	48.2*	41.2	25.0	375.7	999.9	99.9	999.9	82.3	62.
46.1	123.7	15003.3	125.0	-57.8	-99.9	245.1	41.2*	37.3	17.3	390.3	999.9	99.9	999.9	92.1	62.
50.9	131.7	16407.9	100.0	-59.2	-99.9	243.2	31.8*	28.3	14.3	413.4	999.9	99.9	999.9	102.2	62.
56.3	140.0	19156.9	75.0	-64.5	-99.9	238.2	9.1*	7.7	4.8	437.8	999.9	99.9	999.9	106.7	62.
63.8	149.0	23715.5	50.0	-56.6	-99.9	269.6	5.2*	5.2	0.0	510.2	999.9	99.9	999.9	107.4	62.
75.5	158.7	25189.6	25.0	-49.1	-99.9	318.5	3.1	2.1	-2.3	643.8	999.9	99.9	999.9	105.1	63.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 327
NASHVILLE, TENN

6 MAY 1975
1715 GMT

164 20. 0

TIME MIN	CATCT	HEIGHT GPM	PRES MR	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.2	180.0	991.4	22.9	17.1	190.0	4.2	0.7	4.1	298.5	331.6	12.5	70.0	0.0	3.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.6	7.6	325.1	975.0	20.6	16.1	206.1	4.4	1.9	4.0	297.4	328.8	11.9	75.5	0.2	11.
1.4	9.8	549.6	950.0	18.8	16.2	202.8	6.1	2.4	5.6	297.9	330.3	12.3	84.9	0.4	16.
2.3	11.7	778.3	925.0	16.3	15.6	207.2	9.1	4.2	8.1	297.6	329.6	12.1	95.5	0.8	21.
3.1	14.0	1011.4	900.0	14.8	14.6	212.2	11.6	6.3	10.0	298.3	329.3	11.7	98.7	1.4	24.
3.9	16.0	1250.5	875.0	14.4	14.2	218.8	12.3	7.7	9.6	300.3	331.6	11.7	98.6	2.0	27.
4.9	18.4	1495.4	850.0	12.3	12.0	224.5	9.4	6.6	6.7	300.4	328.6	10.5	98.3	2.6	31.
6.2	20.6	1745.3	825.0	9.6	4.6	219.7	6.9	4.4	5.3	299.6	317.5	6.5	71.0	3.2	33.
7.3	22.9	2000.2	800.0	8.2	2.2	228.3	6.8	5.1	4.5	300.6	316.3	5.6	65.9	3.6	35.
8.4	25.3	2263.6	775.0	8.4	5.7	236.0	7.1	5.9	4.0	303.8	324.5	7.5	83.4	4.0	37.
9.4	27.8	2534.2	750.0	6.5	5.7	237.8	8.0	6.8	4.3	304.6	326.0	7.7	94.9	4.5	39.
10.5	30.4	2812.2	725.0	4.6	3.5	244.5	7.2	6.6	3.1	305.4	324.6	6.8	92.7	5.0	41.
11.5	33.0	3097.7	700.0	2.9	-1.0	253.7	7.4	7.1	2.1	306.4	321.0	5.1	75.6	5.3	43.
12.7	35.6	3391.9	675.0	0.9	-3.7	249.3	9.0	8.4	3.2	307.2	319.8	4.3	71.4	5.9	46.
13.9	38.4	3694.2	650.0	-1.6	-5.5	250.1	10.3	9.7	3.5	307.7	319.6	4.1	76.9	6.5	48.
15.1	41.0	4005.8	625.0	-3.1	-13.8	265.7	10.2	10.2	0.8	309.2	315.7	2.1	43.3	7.3	51.
16.4	44.0	4327.8	600.0	-4.8	-23.1	301.2	9.8	8.4	-5.1	310.7	313.9	1.0	22.1	7.7	55.
17.7	47.1	4660.9	575.0	-7.7	-19.3	306.3	11.7	9.5	-6.9	311.1	315.6	1.4	39.0	8.0	61.
19.0	50.2	5004.8	550.0	-10.6	-26.1	305.1	11.8	9.7	-6.8	311.6	314.5	0.9	29.3	8.5	57.
20.3	53.5	5361.5	525.0	-12.0	-57.5	305.3	11.0	8.9	-6.3	314.0	314.1	0.0	1.0	9.0	72.
21.8	56.7	5733.8	500.0	-13.3	-55.8	304.8	11.7	9.6	-6.6	316.8	316.9	0.0	1.4	9.6	77.
23.2	60.3	6122.8	475.0	-15.7	-52.6	310.1	13.0	9.9	-8.4	318.5	318.8	0.1	2.9	10.3	81.
24.9	64.0	6528.1	450.0	-18.6	-47.4	311.2	14.6	11.0	-9.6	319.8	320.2	0.1	5.8	11.2	86.
26.6	67.7	6952.3	425.0	-21.6	-49.2	316.6	16.5	11.3	-12.0	321.3	321.7	0.1	6.1	12.3	92.
28.3	71.5	7396.1	400.0	-25.0	-51.3	313.6	19.5	14.1	-13.4	322.4	322.7	0.1	6.5	13.6	97.
30.1	75.7	7861.8	375.0	-28.8	-44.0	312.3	24.5	18.1	-16.5	323.5	324.2	0.2	21.6	15.7	102.
31.9	80.1	8353.3	350.0	-30.8	-36.1	297.0	26.6	23.7	-12.1	327.2	328.9	0.5	59.5	18.3	106.
33.5	84.6	8875.1	325.0	-34.8	-40.1	276.8	23.3	23.2	-2.8	328.7	330.0	0.4	58.2	20.7	106.
35.5	89.2	9429.0	300.0	-39.2	-44.6	271.6	22.1	22.1	-0.6	330.1	330.9	0.2	55.9	23.2	104.
37.6	94.4	10018.8	275.0	-44.4	99.9	277.7	22.9	22.7	-3.1	331.0	999.9	99.9	999.9	26.2	103.
39.8	99.8	10650.4	250.0	-49.6	99.9	288.6	22.5	21.3	-7.2	332.4	999.9	99.9	999.9	29.0	103.
42.5	105.5	11331.0	225.0	-55.4	99.9	283.4	24.3	23.6	-5.6	333.6	999.9	99.9	999.9	32.9	104.
45.5	111.8	12071.3	200.0	-61.1	99.9	286.1	26.5	25.4	-7.3	336.0	999.9	99.9	999.9	37.4	104.
48.4	118.3	12890.7	175.0	-65.6	99.9	280.6	24.8	24.4	-4.6	341.7	999.9	99.9	999.9	42.4	104.
51.7	125.8	13821.9	150.0	-67.8	99.9	287.5	31.7	30.2	-9.5	353.3	999.9	99.9	999.9	48.1	104.
55.9	133.5	14933.6	125.0	-63.2	99.9	298.5	27.1	23.8	-13.0	380.6	999.9	99.9	999.9	55.1	105.
60.9	141.3	16306.5	100.0	-60.3	99.9	283.2	17.7	17.2	-4.0	411.4	999.9	99.9	999.9	61.5	106.
67.0	149.3	19085.2	75.0	-64.1	99.9	312.5	11.6	8.5	-7.8	438.6	999.9	99.9	999.9	66.7	106.
75.4	158.0	20803.1	50.0	-60.0	99.9	85.9	5.4	-5.4	-0.4	502.0	999.9	99.9	999.9	68.3	107.
88.6	167.0	25010.9	25.0	-51.9	99.9	254.8	3.5	3.4	0.9	635.4	999.9	99.9	999.9	67.5	107.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 340
LITTLE ROCK, ARK

6 MAY 1975
1800 GMT

157 23. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTG GM/KG	RH PCT	RANGE KM	AZ DG
0.8	6.3	79.0	999.0	25.5	19.4	160.0	2.6	-0.9	2.4	300.7	338.8	14.4	69.0	0.7	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.7	8.3	293.1	975.0	23.9	17.6	173.3	6.3	-0.7	6.3	301.0	336.1	13.2	67.9	0.3	356.
1.5	10.6	520.1	950.0	21.5	17.0	173.4	6.2	-0.7	6.2	300.8	335.4	13.0	75.7	0.6	354.
2.4	13.0	750.9	925.0	19.1	17.3	185.5	5.7	0.5	5.7	300.7	336.8	13.6	89.2	0.9	355.
3.3	15.4	986.7	900.0	17.1	16.1	206.4	7.2	3.2	6.5	300.9	335.4	12.9	93.7	1.2	1.
4.2	17.8	1227.2	875.0	15.5	14.6	214.1	10.8	6.0	8.9	301.5	333.9	12.1	94.1	1.7	9.
5.1	20.3	1474.1	850.0	16.6	12.5	210.6	12.0	6.1	10.4	305.0	334.5	10.8	76.7	2.3	17.
6.2	22.7	1723.4	825.0	15.1	9.8	198.9	12.5	4.0	11.8	305.8	331.6	9.3	70.7	3.0	18.
7.2	25.3	1988.7	800.0	13.2	6.7	191.5	12.4	2.5	12.1	306.3	328.1	7.8	64.8	3.8	18.
8.2	27.8	2255.7	775.0	11.9	5.4	188.1	12.7	1.8	12.6	307.6	328.2	7.3	64.0	4.6	16.
9.2	30.6	2529.9	750.0	10.1	5.7	192.0	10.6	2.2	10.3	308.5	330.3	7.7	74.2	5.3	15.
10.1	33.3	2811.5	725.0	8.3	4.9	202.5	9.1	3.5	8.4	309.6	331.1	7.6	79.1	5.8	15.
11.0	36.0	3101.5	700.0	7.1	2.9	212.6	9.6	5.2	8.1	311.2	330.7	6.8	75.0	6.3	16.
11.8	38.8	3400.1	675.0	4.8	2.2	224.7	9.3	6.5	6.6	311.9	331.2	6.7	83.4	6.8	18.
12.9	41.6	3707.2	650.0	2.2	1.2	232.4	8.4	6.7	5.1	312.3	331.1	6.5	92.8	7.2	20.
14.0	44.6	4023.2	625.0	0.0	-3.9	226.1	7.9	5.7	5.5	313.0	326.7	4.6	74.8	7.7	22.
15.1	47.3	4348.9	600.0	-2.6	-9.3	229.5	9.1	6.9	5.9	313.5	323.1	3.2	59.8	8.2	24.
16.2	50.7	4685.2	575.0	-5.1	-16.1	240.4	8.8	7.6	4.2	314.3	320.2	1.9	41.6	8.8	26.
17.5	54.0	5034.0	550.0	-5.5	-37.7	254.2	6.2	6.0	1.7	317.5	318.5	0.3	5.2	9.2	28.
18.8	57.1	5397.1	525.0	-7.9	-39.0	256.2	7.4	7.2	1.8	318.9	319.8	0.2	6.1	9.5	30.
20.0	60.6	5774.6	500.0	-10.4	-40.3	256.6	8.7	8.4	2.0	320.4	321.2	0.2	6.4	9.9	33.
21.3	64.1	6167.2	475.0	-13.3	-42.0	255.6	11.3	10.9	2.8	321.5	322.2	0.2	6.8	10.5	36.
22.8	67.7	6576.4	450.0	-16.6	-44.0	254.4	12.8	12.3	3.4	322.3	323.0	0.2	7.2	11.3	39.
24.3	71.2	7003.1	425.0	-20.1	-46.1	255.0	15.5	15.0	4.0	323.1	323.7	0.1	7.7	12.5	43.
25.9	75.2	7449.0	400.0	-23.7	-48.4	257.4	18.7	18.2	4.1	324.1	324.6	0.1	8.1	13.9	46.
27.6	79.2	7917.5	375.0	-27.1	-50.6	262.5	21.0	20.9	2.8	325.6	326.0	0.1	8.6	15.6	50.
29.3	83.2	8410.5	350.0	-31.1	-53.3	266.9	20.4	20.4	1.1	326.7	327.0	0.1	9.1	17.4	54.
31.2	87.2	8932.8	325.0	-34.4	-55.5	280.7	19.1	18.7	-3.5	329.2	329.5	0.1	9.5	19.0	59.
33.1	92.0	9486.7	300.0	-39.0	99.9	275.5	24.5	24.4	-2.4	330.3	999.9	99.9	999.9	21.1	63.
35.2	96.6	10077.1	275.0	-44.2	99.9	271.3	24.6	24.6	-0.6	331.2	999.9	99.9	999.9	23.9	67.
37.6	101.4	10709.6	250.0	-49.1	99.9	266.3	24.2	24.1	1.6	333.0	999.9	99.9	999.9	27.1	69.
40.2	107.0	11392.4	225.0	-54.0	99.9	266.2	25.7	25.6	1.7	335.7	999.9	99.9	999.9	31.7	72.
42.7	112.6	12140.5	200.0	-58.6	99.9	269.2	24.2	24.2	0.3	340.0	999.9	99.9	999.9	34.3	73.
45.9	118.8	12974.9	175.0	-60.4	99.9	266.5	33.9	33.9	2.1	350.2	999.9	99.9	999.9	39.6	76.
49.0	125.4	13926.0	150.0	-64.3	99.9	267.8	37.1	37.0	1.4	359.4	999.9	99.9	999.9	46.1	77.
53.0	132.3	15045.3	125.0	-62.7	99.9	269.8	27.1	27.1	0.1	381.4	999.9	99.9	999.9	53.8	79.
57.9	139.5	16424.1	100.0	-60.7	99.9	285.8	14.9	14.4	-4.1	410.5	999.9	99.9	999.9	61.2	80.
64.1	146.7	18201.2	75.0	-63.5	99.9	298.5	11.2	9.9	-5.4	439.8	999.9	99.9	999.9	65.0	83.
72.5	154.3	20727.2	50.0	-59.0	99.9	1.0	5.1	-0.1	-5.1	504.6	999.9	99.9	999.9	66.0	83.
84.8	161.5	25191.5	25.0	-49.6	99.9	999.9	99.9	99.9	99.9	642.7	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

15

STATION NO. 349
MONETTE, MO.

6 MAY 1975
1852 GMT

132 74. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	RH PCT	RANGE KM	AZ DG
0.0	8.7	438.0	956.0	26.4	19.3	190.0	5.2	0.9	5.1	305.5	345.8	14.9	65.0	0.3	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.2	9.3	493.8	950.0	26.1	19.7	210.6	11.0	5.6	9.5	305.8	347.7	15.5	68.0	0.2	15.
0.9	11.3	728.0	925.0	22.6	17.7	212.4	10.0	5.4	8.5	304.2	340.3	13.4	70.9	0.5	25.
1.8	13.6	966.2	900.0	20.2	16.2	218.9	9.5	5.9	7.4	304.1	339.4	13.1	78.0	1.0	30.
2.7	15.8	1209.5	875.0	18.9	16.3	226.5	8.6	6.2	5.9	305.2	341.9	13.5	85.1	1.5	34.
3.7	18.2	1458.2	850.0	16.3	12.9	223.7	9.9	6.9	7.2	304.7	335.0	11.1	80.4	2.0	38.
4.6	20.5	1712.5	825.0	14.8	11.4	221.8	9.5	6.3	7.1	305.7	334.2	10.4	80.0	2.6	39.
5.5	22.8	1972.6	800.0	12.7	9.8	217.1	10.6	6.4	8.5	306.0	332.5	9.6	82.3	3.1	39.
6.4	25.3	2239.2	775.0	11.1	6.0	210.1	10.1	5.1	8.8	306.8	328.1	7.6	70.7	3.7	38.
7.4	27.6	2513.4	750.0	11.2	2.2	203.0	9.7	3.8	8.9	309.5	326.8	6.0	53.8	4.2	36.
8.5	30.2	2796.2	725.0	10.0	-3.5	200.1	8.7	3.0	8.1	311.0	322.8	4.0	37.7	4.8	34.
9.5	32.8	3087.0	700.0	8.0	-8.4	213.4	6.5	3.6	5.5	311.8	320.6	2.9	30.2	5.3	33.
10.6	35.4	3386.1	675.0	5.7	-10.4	239.4	5.8	5.0	3.0	312.3	320.2	2.6	30.3	5.7	34.
11.9	38.0	3692.9	650.0	2.7	-12.0	251.3	7.6	7.2	2.4	312.3	319.5	2.3	32.8	6.0	37.
13.0	40.7	4009.5	625.0	1.3	-14.1	248.7	9.9	9.2	3.6	314.2	320.6	2.1	30.7	6.6	40.
14.2	43.4	4336.4	600.0	-1.4	-16.8	249.8	9.7	9.1	3.4	314.6	320.1	1.7	29.9	7.2	42.
15.4	46.4	4673.6	575.0	-4.5	-19.4	242.7	11.4	10.1	5.2	314.9	319.5	1.4	30.0	7.9	45.
16.6	49.3	5022.1	550.0	-7.1	-21.9	236.5	12.6	10.5	6.9	315.8	319.7	1.2	29.5	8.7	46.
17.8	52.1	5383.2	525.0	-8.7	-25.2	237.0	14.1	11.8	7.7	318.0	321.1	0.9	24.9	9.7	47.
19.1	55.2	5760.4	500.0	-10.6	-26.7	232.4	14.4	11.4	8.8	320.2	323.1	0.9	24.9	10.8	48.
20.5	58.3	6152.7	475.0	-14.0	-29.0	230.5	15.3	11.8	9.8	320.7	323.2	0.7	26.7	12.1	48.
21.9	61.6	6560.5	450.0	-17.1	-31.6	236.5	18.9	15.7	10.4	321.8	323.9	0.6	26.8	13.4	49.
23.4	65.1	6986.7	425.0	-20.1	-34.8	237.4	20.5	17.2	11.0	323.3	324.9	0.5	25.3	15.2	50.
24.9	68.4	7432.9	400.0	-23.8	-38.0	234.3	19.9	16.2	11.6	324.0	325.3	0.4	25.4	17.0	50.
26.4	71.9	7900.9	375.0	-27.2	-40.9	230.5	18.4	14.2	11.7	325.6	326.6	0.3	25.6	18.8	51.
28.0	75.8	8393.5	350.0	-31.4	-44.6	230.7	17.8	13.7	11.3	326.3	327.1	0.2	25.7	20.5	51.
29.8	79.8	8915.2	325.0	-34.6	-47.3	243.3	16.2	14.4	7.3	328.9	329.5	0.2	25.8	22.3	51.
31.6	83.8	9469.1	300.0	-39.4	-51.5	255.7	17.9	17.4	4.4	329.6	330.2	0.1	26.0	24.7	52.
33.6	88.0	10058.3	275.0	-44.4	99.9	256.1	19.5	18.9	4.7	330.9	999.9	99.9	999.9	26.1	55.
35.8	92.7	10691.0	250.0	-48.8	99.9	246.1	23.1	21.1	9.3	333.5	999.9	99.9	999.9	28.6	56.
37.8	97.4	11376.8	225.0	-53.0	99.9	246.0	22.9	20.9	9.3	337.3	999.9	99.9	999.9	31.6	57.
40.1	102.5	12128.3	200.0	-57.6	99.9	240.2	21.9	19.0	10.9	341.5	999.9	99.9	999.9	34.7	58.
42.7	108.3	12959.6	175.0	-62.6	99.9	252.8	24.7	23.6	7.3	346.6	999.9	99.9	999.9	38.5	58.
45.5	114.5	13907.5	150.0	-62.7	99.9	249.9	23.8	22.3	8.2	362.1	999.9	99.9	999.9	42.4	59.
48.8	121.5	15026.3	125.0	-64.2	99.9	257.3	21.5	21.0	4.7	378.8	999.9	99.9	999.9	46.6	61.
53.2	129.7	16423.5	100.0	-56.8	99.9	272.0	17.4	17.4	-0.6	418.0	999.9	99.9	999.9	51.6	63.
58.3	138.5	18222.0	75.0	-60.7	99.9	999.9	99.9	99.9	99.9	445.6	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 353
OKLAHOMA CITY, OKLA

6 MAY 1975
1800 GMT

108 156. 0

TIME	CNTCT	HEIGHT	PRES	TEMP	DEW PT	DIR	SPEED	U COMP	V CCMP	POT T	E POT T	MX RTO	RH	RANGE	AZ
MIN		GFH	MB	DEG C	DEG C	DEG	M/SEC	M/SEC	M/SEC	DEG K	DEG K	GM/KG	PCT	KM	DEG
0.0	9.3	392.0	960.2	26.1	12.9	250.0	5.2	4.9	1.8	304.1	331.0	9.8	44.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.3	10.1	485.8	950.0	23.8	11.9	279.2	12.3	12.2	-2.0	302.6	327.8	9.2	47.2	0.1	63.
1.2	12.1	718.5	925.0	22.2	11.8	277.5	9.4	9.4	-1.2	303.3	329.2	9.5	51.9	0.6	92.
1.9	14.3	956.2	900.0	20.4	11.6	278.7	8.3	8.2	-1.3	303.8	330.1	9.6	56.9	0.9	95.
2.5	16.3	1158.6	875.0	17.4	9.9	270.7	7.5	7.5	-0.1	303.0	327.2	8.8	61.6	1.2	95.
3.3	18.6	1445.4	850.0	14.7	9.7	263.2	5.9	5.8	0.7	302.8	327.3	9.0	72.0	1.5	93.
4.1	20.8	1697.4	825.0	13.1	-0.1	267.0	7.9	7.9	0.4	303.1	316.6	4.8	41.5	1.8	92.
4.9	23.1	1955.8	800.0	12.2	-4.4	266.1	10.5	10.5	0.7	304.6	314.7	3.4	30.9	2.3	91.
5.8	25.5	2220.9	775.0	10.3	-5.1	252.0	9.2	8.7	2.8	305.4	315.3	3.4	33.4	2.8	89.
6.6	27.8	2433.2	750.0	9.4	-5.7	236.2	9.0	7.5	5.0	307.3	317.1	3.3	33.7	3.2	85.
7.5	30.3	2773.6	725.0	7.7	-7.6	230.3	11.4	8.8	7.3	308.3	317.3	3.0	32.8	3.6	81.
8.4	32.9	3061.4	700.0	5.3	-10.0	229.7	14.3	10.9	9.2	308.7	316.4	2.6	32.0	4.2	76.
9.4	35.4	3358.0	675.0	3.8	-11.0	220.0	15.4	9.9	11.8	310.3	317.7	2.5	32.9	5.1	71.
10.3	38.0	3663.0	650.0	1.1	-10.9	208.7	16.0	7.7	14.1	310.5	318.3	2.6	40.3	5.7	66.
11.3	40.6	3977.5	625.0	-0.9	-6.6	205.2	20.6	8.7	18.6	311.9	323.1	3.8	65.7	6.6	60.
12.3	43.2	4302.7	600.0	-2.6	-11.9	205.3	25.3	10.8	22.8	313.5	321.4	2.6	48.8	7.9	54.
13.4	46.4	4638.8	575.0	-5.2	-15.5	207.8	26.6	12.4	23.5	314.2	320.4	2.0	43.8	9.4	49.
14.6	49.4	4986.4	550.0	-8.0	-17.3	214.4	29.3	16.6	24.2	314.8	320.6	1.8	48.2	11.3	46.
15.7	52.3	5345.6	525.0	-11.4	-22.1	217.9	30.0	18.4	23.7	314.8	318.8	1.2	40.5	13.2	44.
16.9	55.4	5717.8	500.0	-14.2	-28.8	217.4	29.2	17.7	23.2	315.7	318.1	0.7	27.7	15.3	44.
18.0	58.6	6106.8	475.0	-14.6	-32.5	214.0	27.3	15.3	22.6	319.9	321.7	0.5	20.0	17.2	43.
19.3	62.1	6513.7	450.0	-17.9	-35.1	215.4	25.7	14.9	21.0	320.8	322.3	0.4	20.2	19.1	42.
20.5	65.5	6938.5	425.0	-21.6	-37.6	215.3	26.4	15.2	21.5	321.3	322.5	0.3	21.8	21.2	41.
22.0	69.1	7381.5	400.0	-25.9	-41.2	215.5	24.3	14.1	19.8	321.2	322.2	0.3	22.0	23.3	41.
23.5	72.8	7844.7	375.0	-29.9	-44.6	222.9	24.0	16.3	17.6	321.9	322.6	0.2	22.3	25.6	41.
25.1	76.8	8334.0	350.0	-32.5	-46.8	232.7	26.4	21.0	16.0	324.8	325.4	0.2	22.4	27.9	41.
26.9	80.9	8852.1	325.0	-36.6	-50.2	245.1	27.0	24.5	11.3	326.2	326.6	0.1	22.7	30.6	43.
28.6	85.3	9401.7	300.0	-41.1	99.9	246.5	34.2	31.4	13.7	327.5	999.9	99.9	999.9	33.7	45.
30.7	89.8	9987.8	275.0	-45.4	99.9	244.7	35.4	32.0	15.1	329.5	999.9	99.9	999.9	37.7	47.
32.8	94.8	10617.1	250.0	-50.2	99.9	243.6	40.0	35.8	17.7	331.4	999.9	99.9	999.9	42.1	49.
35.2	100.7	11299.3	225.0	-53.9	99.9	243.8	38.3	34.4	16.9	335.9	999.9	99.9	999.9	47.8	51.
38.0	105.5	12045.2	200.0	-57.7	99.9	241.6	44.3	38.9	21.1	341.5	999.9	99.9	999.9	54.9	53.
40.9	111.3	12886.7	175.0	-59.4	99.9	248.9	27.9	26.0	10.0	351.9	999.9	99.9	999.9	62.0	54.
99.9	99.9	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 363
AMARILLO, TEX

6 MAY 1975
1715 GMT

150 12. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	14.5	1055.0	882.9	17.1	-5.4	267.0	11.8	11.6	2.0	301.2	309.6	2.9	21.0	1.0	0.
09.9	09.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
09.9	09.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
09.9	09.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
09.9	09.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
09.9	09.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.3	15.2	1171.2	875.0	14.3	-2.8	264.1	13.9	13.8	1.4	299.1	309.2	3.6	30.6	0.5	85.
1.1	17.2	1414.2	850.0	11.2	-5.5	261.6	13.4	13.2	1.9	298.3	306.9	3.0	30.6	1.0	84.
1.8	19.5	1662.3	825.0	8.6	-7.7	252.3	13.6	12.9	4.1	298.1	305.6	2.6	30.6	1.5	82.
2.6	21.6	1915.7	800.0	6.6	-9.6	247.0	18.0	16.6	7.0	298.5	305.2	2.3	30.4	2.2	77.
3.5	24.0	2175.1	775.0	4.6	-11.7	243.8	21.8	19.6	9.6	299.0	304.9	2.0	29.3	3.2	74.
4.1	26.1	2441.4	750.0	3.3	-13.6	249.6	22.4	20.9	7.8	300.4	305.7	1.8	27.6	4.1	72.
4.9	28.6	2715.6	725.0	1.9	-14.8	258.1	23.1	22.6	4.8	301.7	306.7	1.7	27.6	5.1	73.
5.6	31.1	2997.6	700.0	0.3	-16.2	254.2	27.5	26.4	7.5	303.0	307.7	1.5	27.6	6.2	73.
6.5	33.7	3289.5	675.0	0.6	-16.3	247.4	25.9	23.9	10.0	306.5	311.4	1.6	26.7	7.5	73.
7.3	36.1	3591.4	650.0	-1.2	-18.5	241.9	27.4	24.2	12.9	307.8	312.1	1.4	25.4	8.9	72.
8.2	38.8	3903.6	625.0	-1.5	-18.8	236.4	28.6	23.8	15.9	310.9	315.3	1.4	25.4	10.4	70.
9.1	41.3	4228.5	600.0	-2.4	-19.5	230.3	28.9	22.2	18.4	313.5	317.9	1.4	25.4	11.8	68.
10.1	44.1	4564.7	575.0	-3.8	-21.5	226.1	29.1	20.9	20.2	314.5	318.3	1.2	25.5	13.5	65.
11.5	47.1	4912.7	550.0	-7.2	-23.6	222.9	28.5	19.4	20.9	315.7	319.1	1.0	25.6	15.7	62.
13.1	50.1	5273.3	525.0	-10.0	-26.0	222.8	27.9	18.9	20.5	316.4	319.3	0.9	25.6	18.2	59.
14.4	53.0	5647.7	500.0	-12.7	-28.2	221.4	29.8	19.7	22.3	317.6	320.1	0.7	25.7	20.6	57.
15.7	56.0	6036.9	475.0	-15.6	-30.7	222.4	28.4	19.2	21.0	318.7	320.8	0.6	25.8	22.7	56.
16.8	59.3	6443.3	450.0	-18.2	-32.2	222.7	31.3	21.3	23.0	320.3	322.3	0.6	26.0	24.5	55.
17.9	62.7	6867.5	425.0	-21.1	-34.7	224.6	31.9	22.4	22.8	321.9	323.5	0.5	28.1	26.6	54.
19.1	66.0	7312.3	400.0	-24.3	-36.9	231.6	31.3	24.6	19.5	323.4	324.9	0.4	29.7	28.9	53.
20.5	69.7	7779.1	375.0	-28.4	-40.5	233.2	36.5	29.2	21.9	323.9	325.0	0.3	30.1	31.8	53.
22.1	73.3	8270.3	350.0	-32.0	-43.6	230.8	27.1	21.0	17.1	325.5	326.4	0.2	30.1	35.1	53.
23.8	77.5	8788.8	325.0	-36.4	-47.3	234.7	25.9	21.1	15.0	326.4	327.0	0.2	31.1	37.5	53.
25.5	81.5	9337.8	300.0	-41.7	99.9	238.7	29.3	25.0	15.2	326.7	999.9	99.9	999.9	40.3	54.
27.4	85.8	9922.1	275.0	-46.4	99.9	236.1	35.6	29.5	15.8	328.1	999.9	99.9	999.9	44.5	54.
29.4	90.6	10548.9	250.0	-50.8	99.9	237.1	32.9	27.6	17.9	330.6	999.9	99.9	999.9	48.4	54.
31.5	95.6	11229.2	225.0	-54.7	99.9	239.9	40.6	35.2	20.4	334.2	999.9	99.9	999.9	52.4	54.
33.9	101.0	11979.0	200.0	-56.2	99.9	237.0	36.8	30.9	20.0	343.7	999.9	99.9	999.9	58.4	55.
36.2	107.0	12827.3	175.0	-55.6	99.9	237.4	32.5	27.4	17.5	358.2	999.9	99.9	999.9	63.3	55.
39.0	113.5	13807.2	150.0	-55.2	99.9	245.9	20.3	18.5	8.3	375.1	999.9	99.9	999.9	67.9	56.
42.2	121.0	14563.7	125.0	-57.3	99.9	235.0	33.0	27.0	18.9	391.3	999.9	99.9	999.9	73.8	56.
46.1	129.3	16367.6	100.0	-55.8	99.9	265.1	9.1	9.1	0.8	420.0	999.9	99.9	999.9	77.6	57.
51.1	138.3	18173.6	75.0	-62.4	99.9	222.4	3.6	2.4	2.7	442.1	999.9	99.9	999.9	81.8	57.
57.3	147.7	20704.0	50.0	-58.8	99.9	32.1	9.0	-4.8	-7.7	504.9	999.9	99.9	999.9	82.5	56.
67.4	158.0	25131.2	25.0	-51.1	99.9	253.8	5.1	4.9	1.4	637.8	999.9	99.9	999.9	81.3	56.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 365
ALBUQUERQUE, N MEX

6 MAY 1975
1715 GMT

143 19. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	21.2	1619.0	832.0	10.0	-11.3	250.0	5.2	4.9	1.8	298.7	304.4	1.9	21.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.2	21.8	1688.7	825.0	7.0	-17.2	265.6	6.9	6.8	0.5	296.1	299.9	1.2	16.0	0.2	52.
1.3	24.3	1939.9	800.0	3.9	-20.0	257.8	7.2	7.0	1.5	295.4	298.4	1.0	15.4	0.6	76.
2.1	26.6	2196.8	775.0	1.8	-19.5	262.7	6.2	6.2	0.8	295.8	299.0	1.0	18.7	0.9	76.
2.9	29.2	2459.8	750.0	-0.7	-18.7	276.3	7.3	7.2	-1.0	295.9	299.4	1.2	24.1	1.2	79.
3.5	31.8	2729.4	725.0	-3.2	-18.6	290.5	7.5	7.0	-2.6	296.1	299.8	1.2	29.1	1.5	84.
4.1	34.4	3005.8	700.0	-6.0	-18.1	294.7	6.4	5.8	-2.7	296.0	299.9	1.3	37.8	1.7	89.
5.1	37.0	3288.9	675.0	-8.7	-18.9	302.7	7.0	5.9	-3.8	296.0	299.8	1.3	43.4	2.1	94.
6.2	39.8	3579.8	650.0	-11.7	-19.0	281.3	8.9	8.7	-1.7	295.8	299.8	1.3	54.8	2.5	98.
7.1	42.3	3879.0	625.0	-13.8	-25.2	272.2	14.4	14.4	-0.6	296.7	299.3	0.8	39.2	3.1	98.
8.1	45.3	4188.8	600.0	-14.8	-36.8	265.6	21.2	21.1	1.6	299.0	299.9	0.3	13.2	4.2	96.
9.5	48.4	4510.6	575.0	-14.6	-36.7	261.3	25.8	25.5	3.9	302.9	303.8	0.3	13.2	6.2	91.
11.3	51.1	4846.9	550.0	-14.3	-39.7	257.5	28.9	28.2	6.3	307.1	307.9	0.2	9.4	9.0	87.
12.4	54.4	5199.8	525.0	-14.9	-40.2	255.6	33.0	31.9	8.2	310.4	311.2	0.2	9.4	11.1	86.
13.5	57.4	5566.9	500.0	-17.6	-42.1	249.3	35.4	33.1	12.5	311.5	312.2	0.2	9.7	13.4	83.
14.7	60.9	5949.2	475.0	-19.7	-43.5	249.0	38.5	36.0	13.8	313.6	314.2	0.2	9.9	16.0	81.
16.2	64.3	6348.8	450.0	-22.3	-45.3	246.5	40.2	36.9	16.0	315.2	315.7	0.1	10.1	19.5	78.
18.2	67.7	6766.9	425.0	-24.6	-47.0	242.9	40.7	36.3	18.5	317.4	317.8	0.1	10.4	24.1	76.
19.5	71.2	7206.7	400.0	-26.1	-48.0	239.6	43.4	37.4	21.9	321.1	321.5	0.1	10.5	27.2	74.
21.0	75.1	7671.3	375.0	-29.0	-50.1	239.9	43.8	37.9	22.0	323.2	323.6	0.1	10.8	31.0	72.
22.3	79.2	8160.9	350.0	-32.7	-52.9	241.3	47.7*	41.9	22.9	324.5	324.8	0.1	11.2	34.9	71.
23.9	83.2	8678.7	325.0	-36.5	-55.7	239.2	44.5*	38.2	22.8	326.3	326.6	0.1	11.5	39.0	70.
26.0	87.4	9229.1	300.0	-41.0	99.9	239.3	48.8*	41.9	24.9	327.5	999.9	99.9	999.9	44.5	68.
27.7	92.0	9814.8	275.0	-45.9	99.9	241.4	43.4*	38.1	20.8	328.8	999.9	99.9	999.9	49.5	68.
29.7	96.8	10444.8	250.0	-49.0	99.9	240.9	38.9*	34.0	18.9	333.2	999.9	99.9	999.9	55.0	67.
32.1	101.8	11129.6	225.0	-53.3	99.9	238.8	39.7*	33.9	20.6	336.9	999.9	99.9	999.9	60.2	66.
34.6	107.5	11888.6	200.0	-53.3	99.9	234.4	31.2*	25.3	18.1	348.3	999.9	99.9	999.9	65.2	66.
38.0	113.3	12754.5	175.0	-50.3	99.9	235.6	24.7*	20.4	14.0	366.9	999.9	99.9	999.9	71.2	65.
40.8	119.9	13748.9	150.0	-56.1	99.9	236.2	33.2*	27.6	18.5	373.4	999.9	99.9	999.9	76.1	64.
44.9	127.0	14910.3	125.0	-56.0	99.9	241.8	31.1*	27.4	14.7	393.6	999.9	99.9	999.9	83.8	63.
49.5	135.0	16328.2	100.0	-54.6	99.9	251.7	16.0*	15.2	5.0	422.3	999.9	99.9	999.9	91.6	63.
54.8	143.0	18152.2	75.0	-58.1	99.9	165.1	8.3*	-2.1	8.1	451.0	999.9	99.9	999.9	93.3	62.
62.4	151.7	20702.8	50.0	-57.4	99.9	295.1	4.4	4.0	-1.9	508.3	999.9	99.9	999.9	94.3	62.
73.9	160.7	25143.5	25.0	-50.9	99.9	242.2	4.8	4.3	2.3	638.7	999.9	99.9	999.9	93.1	62.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 433
SALEM, ILL

6 MAY 1975
1800 GMT

157 22. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.7	175.0	988.6	26.1	18.0	140.0	3.1	-2.0	2.4	302.0	337.6	13.3	61.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.5	6.9	297.0	975.0	24.4	16.6	144.8	4.3	-2.5	3.5	301.4	334.5	12.3	61.8	0.1	322.
1.3	9.2	524.4	950.0	22.5	15.8	149.2	3.6	-1.9	3.1	301.7	333.8	12.0	65.7	0.3	324.
2.1	11.3	756.2	925.0	20.3	16.3	150.1	4.7	-2.4	4.1	301.8	335.9	12.7	77.7	0.5	328.
2.9	13.6	992.8	900.0	18.4	14.6	136.2	5.7	-3.7	4.3	302.1	333.6	11.7	78.2	0.7	326.
3.8	15.9	1234.1	875.0	16.8	11.6	141.6	7.6	-4.7	6.0	302.5	329.4	9.9	71.5	1.1	324.
4.5	18.1	1480.6	850.0	14.6	9.8	142.7	8.0	-4.8	6.4	302.6	327.3	9.0	73.0	1.4	324.
5.4	20.5	1723.0	825.0	12.7	8.2	147.8	7.9	-4.2	6.7	303.1	326.0	8.3	73.9	1.9	324.
6.3	22.9	1990.8	800.0	10.9	4.5	156.4	7.5	-3.0	6.8	303.6	322.1	6.6	64.7	2.3	325.
7.0	25.3	2255.1	775.0	8.8	5.2	165.4	5.5	-1.4	5.3	304.3	324.4	7.2	78.2	2.5	327.
8.0	27.8	2525.9	750.0	6.8	4.4	156.2	3.7	1.2	3.5	304.9	324.6	7.1	85.0	2.8	330.
8.9	30.4	2804.4	725.0	5.6	0.8	228.6	5.1	3.8	3.4	306.4	322.4	5.6	71.4	2.6	333.
9.7	33.1	3090.9	700.0	4.0	-1.8	246.9	6.0	5.5	2.4	307.5	321.4	4.8	65.8	2.9	340.
10.7	35.7	3386.1	675.0	2.3	-11.0	270.7	5.1	5.1	-0.1	308.6	316.3	2.6	38.1	2.9	346.
11.5	38.4	3689.9	650.0	0.4	-15.5	296.3	5.3	4.7	-2.3	309.6	315.1	1.8	29.3	2.8	351.
12.4	41.0	4003.1	625.0	-1.7	-16.7	310.0	6.9	5.3	-4.4	310.7	315.9	1.7	30.7	2.6	356.
13.3	43.9	4326.4	600.0	-4.5	-17.1	306.2	8.2	6.6	-4.8	311.1	316.3	1.7	36.6	2.3	2.
14.3	46.9	4660.1	575.0	-7.3	-14.3	294.5	11.4	10.3	-4.7	311.6	318.4	2.2	57.3	2.1	16.
15.1	50.0	5005.0	550.0	-9.2	-23.6	287.0	13.3	12.7	-3.9	313.2	316.6	1.0	29.8	2.1	34.
16.2	52.9	5364.2	525.0	-10.4	-31.3	281.6	13.1	12.9	-2.6	315.9	317.7	0.5	16.0	2.6	52.
17.4	55.9	5739.3	500.0	-11.6	-30.6	279.2	16.5	16.3	-2.6	319.0	321.0	0.6	18.9	3.3	66.
19.0	59.1	6130.6	475.0	-13.9	-32.4	277.9	17.1	17.0	-2.3	320.8	322.6	0.5	19.1	4.8	76.
20.4	62.6	6539.2	450.0	-17.0	-34.9	280.3	17.2	16.9	-3.1	321.9	323.4	0.4	19.4	6.1	81.
21.6	65.9	6965.0	425.0	-20.4	-37.6	285.2	17.2	16.6	-4.5	322.8	324.1	0.3	19.6	7.3	85.
22.8	69.4	7411.3	400.0	-23.8	-40.4	287.6	17.6	16.7	-5.3	324.0	325.0	0.3	19.9	8.5	88.
24.1	73.0	7879.3	375.0	-27.4	-43.3	281.8	19.8	19.4	-4.0	325.3	326.1	0.2	20.1	9.9	90.
25.4	76.9	8371.8	350.0	-31.6	-39.5	286.9	20.8	19.9	-6.0	326.1	327.3	0.3	45.8	11.5	92.
27.2	80.9	8892.6	325.0	-35.4	-41.2	285.5	23.6	22.8	-6.3	327.9	329.0	0.3	54.6	13.8	95.
29.1	85.0	9445.3	300.0	-39.5	-45.6	279.2	25.2	24.8	-4.0	329.6	330.4	0.2	51.7	16.5	96.
31.1	89.3	10036.5	275.0	-43.4	99.9	269.9	26.0	26.0	0.1	332.3	999.9	99.9	999.9	19.6	96.
32.9	94.0	10669.6	250.0	-49.2	99.9	272.7	25.4	25.4	-1.2	332.9	999.9	99.9	999.9	22.3	95.
34.8	99.0	11351.4	225.0	-55.4	99.9	275.3	22.8	22.7	-2.1	333.6	999.9	99.9	999.9	25.2	95.
37.0	104.2	12092.5	200.0	-61.4	99.9	268.3	22.6	22.6	0.7	335.6	999.9	99.9	999.9	28.1	95.
39.5	110.0	12912.4	175.0	-66.6	99.9	267.9	24.3	24.3	0.9	340.1	999.9	99.9	999.9	31.6	94.
42.8	116.3	13843.1	150.0	-67.6	99.9	280.5	25.9	25.4	-4.7	353.6	999.9	99.9	999.9	36.7	94.
46.5	123.3	14954.7	125.0	-60.7	99.9	302.5	20.2	17.0	-10.8	385.1	999.9	99.9	999.9	42.1	97.
51.1	131.0	16361.8	100.0	-56.7	99.9	293.4	14.7	13.5	-5.8	418.1	999.9	99.9	999.9	46.4	98.
57.4	139.7	18172.9	75.0	-58.4	99.9	314.4	6.1	4.3	-4.3	450.5	999.9	99.9	999.9	50.6	99.
65.0	149.0	20716.5	50.0	-57.9	99.9	125.2	1.8	-1.5	1.1	507.0	999.9	99.9	999.9	52.0	101.
76.9	159.5	25172.7	25.0	-49.5	99.9	999.9	99.9	99.9	99.9	642.7	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 451
DODGE CITY, KAN

6 MAY 1975
1715 GMT

144 36. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCNF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.7	12.8	791.0	913.4	18.9	-5.2	220.0	9.3	6.0	7.1	300.1	308.3	2.8	19.0	6.0	7.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	14.0	917.0	900.0	16.7	-1.7	230.1	10.1	7.7	6.5	295.2	309.9	3.8	28.5	0.3	48.
1.0	15.9	1155.5	875.0	14.0	-4.3	228.9	10.6	8.0	7.0	298.7	308.0	3.3	28.5	0.6	49.
1.5	18.1	1398.8	850.0	11.5	-8.1	226.9	10.4	7.6	7.1	298.6	306.8	2.9	28.6	0.9	49.
2.2	20.3	1647.3	825.0	8.9	-7.2	229.4	11.1	8.4	7.2	298.4	306.1	2.7	31.2	1.3	48.
2.7	22.4	1900.7	800.0	6.4	-8.6	234.7	11.2	9.0	6.6	298.2	305.5	2.5	33.4	1.7	49.
3.6	24.7	2159.6	775.0	3.5	-10.9	235.1	12.8	10.5	7.3	297.9	304.2	2.2	34.0	2.3	51.
4.5	26.9	2424.9	750.0	2.4	-16.7	231.4	16.5	12.9	10.3	299.3	303.5	1.4	22.9	3.1	51.
5.3	29.3	2699.6	725.0	3.4	-17.5	229.9	19.6	15.0	12.6	303.3	307.4	1.3	19.8	4.0	51.
6.1	31.8	2984.7	700.0	3.5	-17.5	230.1	21.8	16.8	14.3	306.5	310.8	1.4	19.8	5.2	51.
6.9	34.3	3278.9	675.0	1.9	-18.7	226.3	23.6	17.0	16.3	308.0	312.0	1.3	19.9	6.0	51.
7.7	36.6	3582.4	650.0	0.6	-19.8	218.5	27.3	17.0	21.4	309.8	313.6	1.2	20.0	7.2	50.
8.5	39.2	3896.3	625.0	-1.1	-21.1	211.7	32.5	17.1	27.7	311.3	314.9	1.1	20.1	8.6	47.
9.4	41.8	4220.6	600.0	-2.8	-22.5	207.6	36.7	17.0	32.5	313.0	316.4	1.0	20.2	10.4	44.
10.4	44.6	4556.8	575.0	-4.8	-24.0	207.1	37.3	17.0	33.2	314.5	317.6	0.9	20.3	12.8	41.
11.6	47.4	4904.2	550.0	-7.9	-26.6	208.3	37.6	17.9	33.1	314.7	317.3	0.8	20.5	15.2	39.
12.6	50.3	5263.6	525.0	-11.0	-29.1	207.9	38.0	17.8	33.6	315.2	317.4	0.6	20.7	17.7	37.
13.8	53.2	5636.3	500.0	-13.7	-31.3	209.5	39.3	19.3	34.2	316.3	318.2	0.6	20.9	20.3	36.
15.1	56.1	6024.0	475.0	-16.4	-33.4	209.7	35.0	17.4	30.4	317.7	319.4	0.5	21.3	23.1	35.
16.4	59.4	6429.6	450.0	-17.5	-33.6	211.1	37.4	19.3	32.0	321.2	322.9	0.5	22.9	26.1	35.
17.8	62.7	6855.7	425.0	-20.5	-36.1	212.1	33.9	18.0	28.7	322.7	324.1	0.4	23.0	28.9	34.
19.2	66.0	7301.7	400.0	-23.0	-38.2	214.6	35.5	20.2	29.3	325.0	326.3	0.3	23.2	32.0	34.
20.6	69.7	7770.8	375.0	-27.3	-41.0	216.9	35.6	21.4	28.5	325.4	326.4	0.3	25.7	34.8	34.
22.3	73.2	8263.5	350.0	-31.4	-43.9	216.8	35.8	21.4	28.6	326.3	327.1	0.2	27.6	38.5	35.
23.9	77.2	8783.2	325.0	-36.0	-47.9	219.1	32.9	20.7	25.5	327.0	327.6	0.1	27.8	41.9	35.
25.9	81.2	9334.0	300.0	-40.5	99.9	218.7	34.4	21.5	26.9	328.2	999.9	99.9	999.9	46.3	35.
27.8	85.6	9922.4	275.0	-44.6	99.9	222.7	33.4	22.6	24.5	330.6	999.9	99.9	999.9	49.6	36.
30.0	90.2	10552.9	250.0	-49.6	99.9	222.6	28.5*	19.3	21.0	332.4	999.9	99.9	999.9	54.0	36.
32.3	95.3	11235.6	225.0	-54.3	99.9	221.5	27.5*	18.2	20.6	335.2	999.9	99.9	999.9	58.2	37.
34.8	100.6	11983.4	200.0	-58.5	99.9	227.9	24.8*	18.4	16.6	340.1	999.9	99.9	999.9	61.7	37.
38.0	106.8	12822.8	175.0	-57.1	99.9	226.7	26.0*	18.9	17.8	355.6	999.9	99.9	999.9	66.1	38.
41.6	113.3	13800.9	150.0	-56.2	99.9	241.4	19.9*	17.5	9.5	373.2	999.9	99.9	999.9	72.0	39.
45.7	121.0	14960.3	125.0	-55.7	99.9	220.0	21.5	13.8	16.5	394.1	999.9	99.9	999.9	75.3	40.
51.1	130.3	16381.1	100.0	-54.8	99.9	258.9	10.9	10.7	2.1	421.9	999.9	99.9	999.9	81.7	41.
57.6	139.3	18203.3	75.0	-58.9	99.9	13.1	1.2	-0.3	-1.2	449.5	999.9	99.9	999.9	85.1	42.
66.5	149.3	20747.7	50.0	-58.8	99.9	108.8	2.6	-2.5	0.8	505.1	999.9	99.9	999.9	85.7	42.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 456
TOPEKA, KAN

6 MAY 1975
1715 GMT

160 13. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.1	7.1	268.0	972.1	27.2	20.0	170.0	7.7	-1.3	7.6	304.9	346.4	15.4	65.0	0.1	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.8	6.7	470.4	950.0	23.2	17.1	186.8	12.1	1.4	12.0	302.5	337.5	13.1	68.8	0.6	6.
1.8	10.6	702.9	925.0	21.0	16.5	188.6	13.3	2.0	13.1	302.5	337.2	12.9	75.6	1.4	6.
2.8	12.7	935.9	900.0	19.1	15.9	201.1	14.7	5.3	13.7	302.9	337.2	12.7	81.5	2.1	9.
3.5	14.8	1182.1	875.0	17.3	14.4	207.6	16.6	7.7	14.7	303.4	335.6	11.9	83.0	2.9	13.
4.3	16.8	1429.8	850.0	15.7	13.4	211.5	14.6	7.6	12.5	304.1	335.3	11.5	86.5	3.6	17.
5.2	19.1	1683.1	825.0	13.7	11.8	208.1	15.1	7.1	13.3	304.5	333.6	10.7	88.7	4.3	19.
6.1	21.1	1942.4	800.0	11.8	10.6	207.1	16.2	7.4	14.4	305.1	332.9	10.1	92.3	5.2	20.
7.1	23.4	2208.1	775.0	11.2	0.4	214.9	14.4	8.3	11.8	306.5	321.2	5.1	47.9	6.1	22.
8.2	25.6	2482.5	750.0	11.3	-6.1	209.1	15.8	7.7	13.8	309.3	319.1	3.3	29.2	7.0	24.
9.3	27.9	2764.4	725.0	9.6	-14.0	200.6	16.1	5.7	15.0	310.2	315.7	1.8	17.4	8.1	24.
10.4	30.4	3054.2	700.0	7.3	-14.9	196.3	16.4	4.6	15.7	310.8	316.1	1.7	18.9	9.2	23.
11.7	32.9	3351.7	675.0	4.6	-17.2	194.3	17.0	4.2	16.5	311.0	315.6	1.5	18.6	10.4	22.
13.1	35.5	3657.7	650.0	2.1	-18.2	199.2	18.3	6.0	17.2	311.5	315.9	1.4	20.6	11.9	21.
14.4	38.0	3972.5	625.0	-0.5	-18.9	207.7	18.0	8.4	15.9	312.0	316.4	1.4	23.2	13.3	21.
15.8	40.6	4297.4	600.0	-3.3	-19.4	218.4	16.1	10.0	12.6	312.4	316.8	1.4	27.5	14.7	23.
17.2	43.3	4632.1	575.0	-6.4	-18.8	225.8	19.6	14.0	13.6	312.6	317.4	1.5	36.8	16.0	24.
18.5	46.2	4977.9	550.0	-8.6	-27.8	218.2	19.3	11.9	15.1	313.9	316.2	0.7	19.5	17.7	26.
19.9	49.2	5337.3	525.0	-10.9	-33.1	200.0	16.1	5.5	15.1	315.3	316.9	0.4	13.9	19.0	26.
21.4	52.0	5709.6	500.0	-14.3	-36.8	205.4	18.7	8.0	16.9	315.6	316.7	0.3	12.8	20.6	26.
23.0	55.2	6099.3	475.0	-15.1	-39.5	219.9	18.9	12.1	14.5	319.2	320.2	0.3	10.3	22.5	26.
24.6	58.3	6565.2	450.0	-18.6	-40.3	219.9	20.8	13.3	15.5	319.8	320.7	0.2	12.7	24.1	28.
26.4	61.7	6928.5	425.0	-22.1	-42.9	222.0	21.2	14.2	15.7	320.6	321.3	0.2	13.0	26.4	29.
28.0	65.3	7373.0	400.0	-23.9	-45.6	218.3	21.8	13.5	17.1	323.9	324.5	0.2	13.3	28.7	30.
29.7	68.7	7841.3	375.0	-27.3	-48.7	213.7	17.6	9.8	14.6	325.4	325.9	0.1	10.8	30.6	30.
31.8	72.5	8334.0	350.0	-31.5	-50.7	211.5	20.2	10.6	17.2	326.2	326.6	0.1	12.9	32.8	30.
33.8	76.5	8853.7	325.0	-36.1	-54.2	216.3	16.1	9.5	13.0	326.9	327.1	0.1	13.3	35.0	30.
35.9	80.6	9404.8	300.0	-40.2	99.9	208.2	18.2	8.6	16.1	328.7	999.9	99.9	999.9	37.2	31.
38.3	85.2	9991.5	275.0	-45.5	99.9	197.2	15.7	4.6	15.0	329.3	999.9	99.9	999.9	39.5	30.
40.7	89.8	10619.5	250.0	-50.8	99.9	194.2	16.3	4.0	15.8	330.5	999.9	99.9	999.9	42.0	29.
43.2	95.2	11298.1	225.0	-55.4	99.9	200.0	17.6	6.0	16.5	333.6	999.9	99.9	999.9	44.2	28.
45.9	100.6	12042.2	200.0	-59.2	99.9	208.1	20.5	9.6	18.0	339.0	999.9	99.9	999.9	47.1	28.
49.0	107.3	12875.2	175.0	-60.6	99.9	221.0	22.0	14.5	16.6	349.9	999.9	99.9	999.9	51.1	29.
52.3	113.7	13832.3	150.0	-62.2	99.9	224.6	15.7	11.0	11.2	362.9	999.9	99.9	999.9	53.4	29.
56.2	121.3	14962.1	125.0	-57.7	99.9	254.7	16.4	15.8	4.3	390.5	999.9	99.9	999.9	58.8	31.
60.8	130.3	16382.5	100.0	-55.8	99.9	256.5	14.8	14.4	3.5	419.5	999.9	99.9	999.9	61.6	33.
66.7	140.0	18191.9	75.0	-59.8	99.9	303.6	9.8	8.1	-5.4	447.6	999.9	99.9	999.9	62.8	36.
74.4	150.3	20743.2	50.0	-57.7	99.9	307.4	5.1	4.1	-3.1	507.5	999.9	99.9	999.9	63.4	39.
86.8	161.0	25184.8	25.0	-50.5	99.9	49.5	1.5	-1.1	-1.0	639.5	999.9	99.9	999.9	61.3	39.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 476
GRAND JUNCTION, COLO

6 MAY 1975
1716 GMT

146 20. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	20.1	1474.0	845.0	5.6	-2.7	320.0	3.6	2.3	-2.8	293.0	303.2	3.7	55.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	21.8	1670.2	825.0	5.6	-6.8	305.2	5.7	4.6	-3.3	294.9	302.8	2.8	40.3	0.1	122.
1.0	24.2	1920.7	800.0	3.2	-7.6	304.1	4.8	4.0	-2.7	294.9	302.5	2.7	45.1	0.3	124.
1.5	26.5	2176.9	775.0	0.6	-8.0	285.8	4.5	4.3	-1.2	294.7	302.4	2.7	52.7	0.4	123.
2.0	29.0	2438.9	750.0	-1.9	-8.5	267.0	5.9	5.9	0.3	294.8	302.5	2.7	60.6	0.6	118.
2.5	31.7	2707.5	725.0	-4.4	-10.3	261.5	8.5	8.4	1.3	295.0	301.9	2.4	63.3	0.8	107.
3.1	34.4	2982.9	700.0	-6.9	-8.7	262.3	10.3	10.2	1.4	295.1	303.2	2.8	86.9	1.1	99.
3.8	36.9	3265.2	675.0	-10.0	-11.3	255.7	9.5	9.2	2.3	294.7	301.6	2.4	90.5	1.5	94.
4.6	39.8	3555.0	650.0	-12.3	-12.3	245.5	8.9	8.1	3.7	295.3	301.8	2.3	101.1	1.9	88.
5.2	42.4	3854.2	625.0	-13.9	-13.9	245.2	9.1	8.3	3.2	296.8	302.9	2.1	102.5	2.2	84.
6.0	45.3	4163.1	600.0	-17.4	-23.6	255.6	10.4	10.1	2.6	296.1	299.1	1.0	60.1	2.6	81.
7.0	48.4	4480.3	575.0	-19.9	-32.2	263.0	10.9	10.8	1.3	296.7	298.1	0.4	32.4	3.3	82.
8.1	51.3	4808.5	550.0	-22.4	-36.0	268.8	9.2	9.2	0.2	297.5	298.5	0.3	27.6	4.0	82.
9.2	54.4	5148.6	525.0	-24.9	-37.4	286.4	6.8	6.4	-2.1	298.5	299.5	0.3	30.1	4.5	84.
10.3	57.5	5501.7	500.0	-27.6	-36.9	281.0	5.5	5.4	-1.0	299.4	300.5	0.3	40.4	4.9	86.
11.6	60.9	5868.1	475.0	-30.9	-42.0	255.3	5.3	5.1	1.3	299.7	300.4	0.2	32.2	5.2	86.
12.8	64.3	6249.9	450.0	-33.4	-44.5	208.1	2.4	1.1	2.1	301.2	301.7	0.2	31.6	5.5	85.
14.1	67.6	6648.8	425.0	-36.5	-46.5	153.8	1.5	-0.7	1.3	302.2	302.7	0.1	34.3	5.5	83.
15.3	71.0	7066.2	400.0	-39.6	99.9	72.8	2.8	-2.7	-0.8	303.5	999.9	99.9	999.9	5.4	83.
16.8	75.0	7505.7	375.0	-42.0	99.9	18.9	1.7	-0.5	-1.6	306.0	999.9	99.9	999.9	5.2	84.
18.2	79.0	7971.6	350.0	-42.7	99.9	267.1	3.6	3.6	0.2	311.2	999.9	99.9	999.9	5.2	85.
19.7	83.0	8473.6	325.0	-40.9	99.9	266.3	9.9	9.9	0.6	320.3	999.9	99.9	999.9	5.9	85.
21.4	87.2	9021.2	300.0	-39.3	99.9	252.1	14.3	13.6	4.4	330.0	999.9	99.9	999.9	7.2	84.
23.3	92.0	9616.6	275.0	-38.8	99.9	233.7	15.8	12.7	9.4	339.0	999.9	99.9	999.9	8.8	80.
25.2	96.6	10269.9	250.0	-40.0	99.9	227.9	21.4	15.9	14.3	346.6	999.9	99.9	999.9	10.8	74.
27.8	101.8	10687.6	225.0	-41.3	99.9	236.0	21.5	17.8	12.0	355.2	999.9	99.9	999.9	13.8	70.
30.5	107.5	11781.8	200.0	-44.2	99.9	232.9	21.3	17.0	12.9	362.8	999.9	99.9	999.9	17.4	67.
33.6	113.5	12668.6	175.0	-48.6	99.9	233.6	22.1	17.8	13.1	369.7	999.9	99.9	999.9	21.3	64.
37.2	120.0	13679.0	150.0	-49.3	99.9	226.9	15.4	11.2	10.5	385.2	999.9	99.9	999.9	25.6	62.
41.3	127.3	14872.7	125.0	-49.9	99.9	252.3	7.5	7.1	2.3	404.6	999.9	99.9	999.9	28.5	61.
46.0	135.5	16318.7	100.0	-53.9	99.9	199.3	9.8	3.2	9.2	423.6	999.9	99.9	999.9	29.7	59.
51.7	143.5	18181.2	75.0	-53.9	99.9	154.7	7.6	-3.3	6.9	459.9	999.9	99.9	999.9	31.5	55.
59.2	152.7	20759.5	50.0	-55.6	99.9	305.7	2.5	2.0	-1.5	512.5	999.9	99.9	999.9	32.2	52.
70.0	162.7	25220.1	25.0	-51.6	99.9	60.5	2.7	-2.4	-1.4	636.6	999.9	99.9	999.9	31.2	52.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 11001
MARSHALL SPACE FLIGHT CENTER

6 MAY 1975
1730 GMT

132 103. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCNP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.7	6.1	180.0	992.9	22.0	18.8	130.0	4.1	-3.1	2.6	297.0	334.1	13.9	82.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.7	7.7	337.7	975.0	19.7	16.7	189.6	3.2	0.5	3.2	296.7	329.2	12.4	83.0	0.1	325.
1.6	10.7	561.3	950.0	17.4	16.3	205.7	5.4	2.3	4.8	296.5	329.0	12.4	93.1	0.3	356.
2.5	12.0	789.2	925.0	16.0	15.2	220.1	9.1	5.8	7.0	297.2	328.4	11.8	95.0	0.7	19.
3.4	14.3	1022.8	900.0	15.2	14.3	216.6	9.8	5.8	7.8	298.7	329.3	11.5	94.1	1.2	27.
4.3	16.4	1262.1	875.0	14.5	13.4	213.0	9.1	4.9	7.6	300.3	330.2	11.2	93.1	1.7	29.
5.2	18.7	1507.3	850.0	12.8	11.6	214.9	9.5	5.4	7.8	300.9	328.4	10.2	92.4	2.2	31.
6.2	21.0	1758.2	825.0	11.8	10.6	209.9	9.7	4.8	8.4	302.3	329.0	9.8	92.6	2.7	31.
7.2	23.4	2015.8	800.0	10.1	8.6	212.6	10.0	5.4	8.4	303.0	327.2	8.8	90.4	3.4	31.
8.1	25.7	2280.1	775.0	9.2	7.2	221.7	8.9	5.9	6.6	304.8	327.8	8.3	87.6	3.9	32.
9.3	28.2	2551.5	750.0	7.3	5.3	228.5	9.5	7.1	6.3	305.5	326.4	7.5	86.9	4.4	34.
10.3	30.8	2829.9	725.0	5.0	2.5	230.6	10.1	7.8	6.4	305.7	323.6	6.3	83.7	5.0	36.
11.5	33.4	3115.9	700.0	3.6	-4.2	229.0	8.8	6.6	5.8	306.9	318.7	4.0	86.9	5.7	37.
12.6	35.9	3410.2	675.0	1.5	-4.6	232.5	8.3	6.5	5.0	307.9	319.7	4.0	84.0	6.2	38.
13.7	38.7	3712.9	650.0	-1.5	-6.6	241.2	6.1	5.4	2.9	307.7	318.3	3.6	88.1	6.7	40.
15.0	41.3	4024.3	625.0	-3.5	-8.6	263.9	3.8	3.8	0.4	308.8	318.4	3.2	67.6	7.0	41.
16.1	44.3	4346.0	600.0	-5.4	-16.5	295.3	5.4	4.9	-2.3	310.1	315.5	1.7	41.1	7.2	43.
17.3	47.3	4678.9	575.0	-7.6	-17.8	286.7	7.2	6.9	-2.1	311.3	316.4	1.6	43.4	7.3	47.
18.5	50.3	5023.1	550.0	-10.6	-25.6	278.9	9.1	9.0	-1.4	311.6	314.5	0.9	29.6	7.7	50.
20.0	53.4	5379.4	525.0	-12.2	-33.4	275.3	10.5	10.4	-1.0	313.7	315.2	0.4	15.2	8.3	55.
21.4	56.4	5752.3	500.0	-13.2	-34.1	262.5	11.3	11.2	1.5	317.0	318.5	0.4	15.2	9.1	58.
22.7	59.8	6141.1	475.0	-15.7	-36.0	278.7	8.4	8.3	-1.3	318.5	319.8	0.4	15.5	9.8	60.
24.3	63.3	6546.2	450.0	-18.9	-38.5	277.1	8.7	8.6	-1.1	319.5	320.6	0.3	15.7	10.3	63.
25.7	66.7	6969.2	425.0	-22.0	99.9	264.3	9.3	9.2	0.9	320.7	999.9	99.9	999.9	11.0	65.
27.4	70.4	7411.9	400.0	-25.6	99.9	274.4	12.0	12.0	-0.9	321.6	999.9	99.9	999.9	12.0	67.
29.1	74.2	7877.6	375.0	-28.0	99.9	282.4	16.5	16.2	-3.5	324.6	999.9	99.9	999.9	13.3	70.
31.0	78.3	8369.5	350.0	-31.0	99.9	279.6	19.9	19.6	-3.3	326.9	999.9	99.9	999.9	15.0	74.
33.0	82.5	8891.2	325.0	-35.1	99.9	286.1	20.6	19.8	-5.7	328.3	999.9	99.9	999.9	17.4	78.
35.1	86.8	9443.3	300.0	-39.9	99.9	288.4	23.1	21.9	-7.3	329.2	999.9	99.9	999.9	19.8	82.
37.1	91.8	10032.7	275.0	-44.2	99.9	295.1	28.3	25.7	-12.0	331.3	999.9	99.9	999.9	22.4	87.
39.3	96.6	10665.0	250.0	-49.2	99.9	270.9	30.9	30.9	-0.5	332.9	999.9	99.9	999.9	26.2	87.
42.0	102.0	11345.2	225.0	-55.9	99.9	267.3	31.1	31.1	1.5	332.9	999.9	99.9	999.9	31.4	87.
44.8	108.3	12082.5	200.0	-62.9	99.9	273.5	32.3	32.3	-1.9	333.2	999.9	99.9	999.9	36.9	88.
47.5	114.5	12895.5	175.0	-67.1	99.9	274.2	36.8	36.7	-2.7	339.3	999.9	99.9	999.9	42.6	88.
50.5	121.7	13825.9	150.0	-66.8	99.9	286.0	40.0	38.4	-11.0	355.0	999.9	99.9	999.9	49.5	90.
54.1	129.7	14928.9	125.0	-66.5	99.9	306.3	27.7	22.3	-16.4	374.6	999.9	99.9	999.9	55.7	94.
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 22002
FT. SILL, OKLA

6 MAY 1975
1900 GMT

155 23. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.1	9.1	362.0	963.5	28.0	5.6	240.0	3.1	2.7	1.5	305.2	322.0	5.9	24.0	0.0	6.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	10.2	486.4	950.0	25.1	6.1	242.0	5.3	4.7	2.5	303.5	321.0	6.3	29.7	0.1	119.
1.2	12.4	719.0	925.0	22.3	3.9	246.0	6.0	5.4	2.4	302.9	318.4	5.5	30.0	0.3	82.
1.7	14.7	956.0	900.0	20.1	2.8	254.6	6.3	6.1	1.7	302.9	317.6	5.2	31.8	0.5	77.
2.4	17.0	1197.6	875.0	17.6	1.5	262.9	5.5	5.5	0.7	302.8	316.6	4.9	33.7	0.7	78.
3.2	19.4	1444.5	850.0	15.5	1.1	271.0	4.7	4.7	-0.1	303.1	316.9	4.9	37.3	1.0	80.
4.1	21.7	1696.4	825.0	13.0	-0.3	269.3	5.9	5.9	0.1	302.9	315.9	4.6	40.1	1.2	83.
5.0	24.3	1954.3	800.0	12.1	-3.4	250.8	10.2	9.6	3.4	304.6	315.4	3.7	33.7	1.7	82.
6.1	26.7	2219.5	775.0	10.4	-5.1	245.4	12.4	11.3	5.1	305.4	315.3	3.4	33.2	2.4	77.
7.3	29.3	2491.1	750.0	8.0	-7.2	249.4	14.8	13.8	5.2	305.6	314.4	3.0	33.2	3.3	74.
8.3	32.0	2769.6	725.0	5.9	-8.6	250.1	17.3	16.3	5.9	306.3	314.5	2.7	34.2	4.4	74.
9.5	34.9	3056.2	700.0	4.4	-10.5	237.3	17.3	14.6	9.4	307.7	315.1	2.5	32.8	5.6	72.
10.6	37.4	3351.5	675.0	2.5	-11.1	222.3	17.2	11.6	12.7	308.8	316.2	2.4	35.8	6.8	68.
11.8	40.2	3655.6	650.0	0.7	-10.0	208.1	18.1	8.5	15.9	310.1	318.3	2.7	44.4	7.7	63.
13.1	43.0	3959.7	625.0	-1.0	-4.6	208.9	23.1	11.2	20.2	311.9	324.8	4.4	76.2	9.0	57.
14.4	46.3	4295.0	600.0	-2.5	-13.8	212.9	26.3	14.3	22.1	313.5	320.3	2.2	41.5	10.9	53.
15.6	49.1	4631.0	575.0	-5.5	-17.2	216.3	26.0	15.4	21.0	313.7	319.1	1.7	39.1	12.7	50.
16.8	52.1	4977.6	550.0	-8.3	-28.4	219.8	25.9	16.6	19.9	314.3	316.5	0.7	17.8	14.5	48.
18.0	55.3	5337.4	525.0	-10.3	-28.7	220.1	28.6	18.4	21.9	316.1	318.3	0.7	20.4	16.4	48.
19.2	58.6	5710.8	500.0	-13.5	-31.3	217.0	29.9	18.0	23.9	316.6	318.4	0.6	20.5	18.6	47.
20.6	62.3	6099.1	475.0	-15.8	-33.2	211.0	30.3	15.6	25.9	318.4	320.0	0.5	20.7	21.0	45.
22.0	65.4	6505.0	450.0	-18.6	-35.3	212.8	27.4	14.8	23.0	319.9	321.3	0.4	21.2	23.5	43.
23.5	69.3	6928.1	425.0	-22.0	-37.9	221.7	25.9	17.2	19.3	320.8	322.0	0.3	21.9	25.7	43.
25.0	72.7	7370.8	400.0	-25.9	-40.2	224.2	25.6	17.9	18.4	321.3	322.3	0.3	24.6	28.0	43.
26.5	76.7	7834.4	375.0	-29.8	-43.4	229.2	26.3	19.9	17.2	322.1	322.9	0.2	24.9	30.3	43.
28.2	80.8	8323.3	350.0	-33.0	-47.4	241.5	29.3	25.8	14.0	324.2	324.8	0.1	21.8	33.1	44.
30.0	85.1	8849.3	325.0	-36.9	99.9	246.1	35.1	32.1	14.3	325.8	999.9	99.9	999.9	36.2	46.
31.9	89.5	9390.3	300.0	-40.7	99.9	244.4	40.6	36.6	17.6	328.0	999.9	99.9	999.9	40.6	48.
33.9	94.4	9977.3	275.0	-44.9	99.9	244.5	41.7	37.6	18.0	337.2	999.9	99.9	999.9	45.1	50.
35.9	99.3	10608.7	250.0	-49.1	99.9	245.0	46.0	41.6	19.4	333.1	999.9	99.9	999.9	50.4	51.
38.0	104.5	11292.4	225.0	-53.9	99.9	250.9	39.2	37.1	12.8	335.9	999.9	99.9	999.9	55.8	53.
40.2	110.3	12046.9	200.0	-58.2	99.9	250.9	35.2	33.2	11.5	340.6	999.9	99.9	999.9	60.7	54.
42.9	116.3	12980.0	175.0	-59.1	99.9	245.9	51.7*	47.2	21.1	352.4	999.9	99.9	999.9	67.4	56.
45.7	123.3	13847.4	150.0	-58.4	99.9	245.8	32.8*	30.8	11.3	369.6	999.9	99.9	999.9	74.6	57.
49.1	130.5	14988.1	125.0	-60.4	99.9	250.8	30.3*	28.6	10.0	385.6	999.9	99.9	999.9	79.9	58.
52.8	138.3	16378.1	100.0	-62.0	99.9	257.7	15.7	15.3	3.3	407.6	999.9	99.9	999.9	84.8	59.
57.3	145.7	18151.7	75.0	-63.5	99.9	283.0	5.7	5.6	-1.3	439.9	999.9	99.9	999.9	88.4	60.
62.9	153.7	20653.8	50.0	-60.6	99.9	33.1	3.7	-2.0	-3.1	500.8	999.9	99.9	999.9	88.2	60.
72.5	162.3	25094.9	25.0	-49.7	99.9	999.9	99.9	99.9	99.9	642.2	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

Sounding Data

6 May 1975

2100 GMT

85 - 107
~~85 - 108~~

STATION NO. 232
BOOTHVILLE, LA

6 MAY 1975
2015 GMT

156 11. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	F POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.7	5.3	1.0	1009.5	27.8	24.7	160.7	6.7	-2.3	6.3	302.7	353.3	19.0	80.7	0.7	0.
0.3	5.9	85.0	1000.0	25.8	21.9	160.0	9.3	-3.2	8.7	301.2	345.6	16.8	79.3	0.3	342.
1.4	8.1	308.0	975.0	23.5	21.7	168.6	11.5	-2.3	11.3	301.1	346.0	17.0	89.6	1.4	342.
2.4	10.3	535.4	950.0	22.4	18.7	176.3	13.0	-0.8	13.7	301.9	340.6	14.5	79.9	1.6	347.
3.3	12.5	767.5	925.0	20.9	16.7	178.4	11.9	-0.3	11.9	302.5	337.6	13.1	76.9	2.3	350.
4.3	14.7	1004.8	900.0	20.6	13.0	202.0	7.9	3.0	7.4	304.2	333.1	17.6	61.8	2.8	353.
5.2	16.8	1248.5	875.0	19.6	11.4	212.1	8.4	4.4	7.1	305.5	332.3	9.7	58.8	3.3	358.
6.3	19.1	1497.5	850.0	18.0	6.2	192.6	7.7	1.7	7.6	306.0	325.8	7.0	45.8	3.7	2.
7.4	21.3	1752.5	825.0	16.2	3.3	191.7	4.8	1.0	4.7	306.5	323.3	5.9	42.1	4.1	3.
8.4	23.7	2013.6	800.0	14.9	2.2	234.5	4.9	4.0	2.8	307.8	324.0	5.6	42.4	4.3	4.
9.6	25.9	2281.8	775.0	14.1	0.0	233.4	6.2	5.0	3.7	309.6	324.1	5.0	38.0	4.6	9.
10.6	28.3	2537.8	750.0	12.6	-3.7	232.0	5.7	4.5	3.5	310.8	323.0	4.1	33.9	4.9	11.
11.8	30.9	2841.7	725.0	11.4	-0.7	252.3	7.9	7.5	2.4	312.6	327.4	5.0	43.0	5.2	15.
13.0	33.5	3134.0	700.0	8.9	-4.2	256.4	9.2	9.0	2.2	312.9	325.0	4.1	39.6	5.5	21.
14.2	35.9	3434.7	675.0	6.9	-12.6	259.4	10.7	10.5	2.0	313.6	320.3	2.2	23.3	6.7	27.
15.5	38.6	3742.9	650.0	4.9	-19.8	271.7	14.1	14.1	-0.4	314.6	318.5	1.2	14.6	6.5	33.
16.7	41.1	4061.5	625.0	3.7	-20.5	279.5	17.2	17.0	-2.8	316.8	327.7	1.2	15.1	7.1	42.
18.1	43.9	4397.9	600.0	1.0	-17.0	274.3	18.0	18.0	-1.4	317.4	322.8	1.7	24.6	8.0	51.
19.4	46.8	4731.3	575.0	-1.9	-13.7	266.9	20.3	20.3	1.1	318.0	325.3	2.3	40.2	9.2	57.
20.7	49.8	5082.9	550.0	-5.0	-14.0	261.0	21.5	21.3	3.4	318.4	325.9	2.4	49.4	10.7	61.
22.3	52.6	5446.6	525.0	-8.1	-13.4	265.9	23.1	23.1	1.7	319.0	327.2	2.6	65.4	12.7	64.
23.8	55.5	5824.0	500.0	-11.2	-15.3	273.0	23.2	23.1	-1.2	319.7	327.1	2.3	71.6	14.7	68.
25.3	58.6	6217.9	475.0	-10.9	-39.5	278.4	22.5	22.3	-3.3	324.4	325.3	0.3	7.3	16.6	72.
26.8	61.9	6630.9	450.0	-13.6	-40.9	278.1	20.7	20.5	-2.9	326.1	327.0	0.2	7.8	18.3	74.
28.4	65.2	7063.2	425.0	-16.4	-42.5	286.7	21.1	20.3	-6.1	327.8	328.6	0.2	8.3	20.7	77.
30.1	68.6	7516.7	400.0	-20.1	-41.4	286.9	23.5	22.5	-6.8	328.9	329.8	0.2	12.8	22.0	80.
32.7	72.0	7990.8	375.0	-23.6	-43.4	287.9	26.1	24.9	-8.0	330.4	331.2	0.2	14.1	24.7	83.
33.9	75.8	8491.8	350.0	-27.3	-42.6	292.5	26.0	24.0	-10.0	331.9	332.8	0.2	21.7	27.2	86.
35.9	79.7	9021.1	325.0	-31.4	-40.6	288.2	30.2	28.7	-9.4	333.4	334.6	0.3	39.5	30.1	88.
39.0	83.7	9582.2	300.0	-36.2	-43.8	282.7	35.8	35.0	-7.4	334.3	335.3	0.3	44.6	33.9	90.
40.1	87.8	10180.2	275.0	-40.9	99.9	273.9	38.8	38.7	-2.6	336.0	999.9	99.9	999.9	38.8	91.
42.4	92.5	11821.6	250.0	-46.3	99.9	273.3	35.9	35.8	-2.1	337.2	999.9	99.9	999.9	44.0	92.
44.9	97.2	11512.0	225.0	-52.6	99.9	275.9	38.9	38.7	-4.0	337.9	999.9	99.9	999.9	49.7	92.
47.7	102.3	12264.2	200.0	-57.2	99.9	286.8	41.2	39.4	-11.9	342.2	999.9	99.9	999.9	56.1	93.
50.5	108.7	13798.9	175.0	-62.3	99.9	283.3	43.7	42.5	-10.7	347.2	999.9	99.9	999.9	62.7	95.
54.1	114.3	14042.2	150.0	-66.3	99.9	277.4	44.8	44.4	-5.7	355.9	999.9	99.9	999.9	72.8	95.
58.0	121.7	15147.9	125.0	-67.2	99.9	291.2	46.3*	43.1	-16.8	373.2	999.9	99.9	999.9	84.2	96.
62.6	128.7	16489.0	100.0	-66.2	99.9	284.4	26.0*	25.2	-6.5	399.9	999.9	99.9	999.9	93.2	98.
68.3	137.0	18202.1	75.0	-74.7	99.9	286.7	15.6*	14.9	-4.5	416.3	999.9	99.9	999.9	98.6	99.
76.2	145.3	21684.1	50.0	-61.3	99.9	302.3	3.5	2.9	-1.9	499.2	999.9	99.9	999.9	99.5	99.
89.8	155.0	25127.1	25.0	-46.3	99.9	108.3	2.8	-2.7	0.9	651.4	999.9	99.9	999.9	99.1	99.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 235
JACKSON, MISS

6 MAY 1975
2015 GMT

159 17. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.1	4.7	100.0	998.7	25.9	20.0	150.0	4.2	-2.1	3.6	301.2	340.8	14.9	70.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.7	6.4	310.5	975.0	22.3	18.6	158.9	7.7	-2.8	7.1	299.5	336.5	14.0	79.4	0.2	339.
1.4	8.4	536.5	950.0	7.7	17.2	167.7	9.5	-2.0	9.3	299.9	334.9	13.2	80.7	0.5	341.
2.1	10.4	767.3	925.0	19.2	16.1	175.2	11.9	-1.0	11.9	300.6	334.1	12.5	82.3	1.0	346.
2.8	12.4	1003.2	900.0	18.7	13.7	189.9	12.6	2.2	12.4	302.2	332.1	11.1	72.9	1.6	351.
3.6	14.6	1245.4	875.0	18.0	13.2	214.6	11.5	6.5	9.4	304.0	334.0	11.0	73.7	2.1	360.
4.6	16.6	1493.5	850.0	15.9	14.8	224.8	13.0	9.2	9.2	304.5	338.8	12.6	93.3	2.6	10.
5.5	18.8	1747.1	825.0	13.7	13.3	229.3	12.9	9.8	8.4	304.6	336.6	11.8	97.5	3.3	18.
6.5	20.9	2006.9	800.0	12.6	12.2	240.2	12.4	10.7	6.1	306.1	337.1	11.3	97.5	3.8	24.
7.3	23.3	2274.0	775.0	11.7	11.4	249.1	12.6	11.8	4.5	307.8	338.3	11.0	98.1	4.3	30.
8.4	25.5	2548.3	750.0	9.2	7.0	254.8	11.6	11.2	3.1	307.6	331.3	8.4	86.1	5.0	36.
9.4	27.9	2828.4	725.0	7.9	0.7	251.1	9.7	9.2	3.1	308.8	324.9	5.6	60.4	5.4	40.
10.3	30.4	3117.9	700.0	6.4	-0.3	248.8	8.9	9.3	3.2	310.3	325.9	5.4	62.2	5.9	42.
11.7	32.9	3415.5	675.0	4.7	-2.4	251.3	7.4	7.0	2.4	311.5	325.5	4.8	50.9	6.4	45.
12.3	35.5	3722.2	650.0	2.4	-4.7	261.0	5.7	5.7	0.9	312.2	324.5	4.2	50.6	6.7	46.
13.5	38.0	4038.1	625.0	0.5	-0.5	271.2	4.3	4.3	-0.1	313.4	322.5	3.0	47.0	6.9	48.
14.6	40.6	4365.2	600.0	-1.2	-11.8	275.6	5.7	5.7	-0.6	315.1	323.1	2.6	44.1	7.2	50.
15.8	43.4	4707.2	575.0	-3.4	-18.5	282.3	8.7	8.5	-1.9	316.2	321.2	1.6	30.3	7.5	53.
17.1	46.2	5053.9	550.0	-6.4	-32.9	287.6	11.2	10.6	-3.4	318.9	320.4	0.4	8.5	8.1	58.
18.5	49.3	5419.3	525.0	-6.3	-34.2	289.0	10.0	9.4	-3.2	320.9	322.3	0.4	8.8	8.7	62.
19.8	52.1	5798.9	500.0	-9.3	-36.1	285.9	12.6	12.1	-3.5	321.7	323.0	0.3	9.1	9.3	66.
21.2	55.2	6192.9	475.0	-12.4	-38.2	282.0	15.5	15.1	-3.2	322.6	323.6	0.3	9.5	10.2	70.
22.6	58.3	6603.8	450.0	-15.3	-40.1	276.2	20.4	20.3	-2.2	324.0	324.9	0.3	9.8	11.5	73.
24.1	61.7	7033.6	425.0	-17.2	-41.4	277.7	22.6	22.4	-3.0	326.8	327.7	0.2	10.0	13.4	77.
25.6	65.2	7485.4	400.0	-20.8	-43.9	286.1	24.2	23.3	-6.7	327.9	328.6	0.2	10.4	15.4	80.
27.3	68.7	7958.7	375.0	-24.7	-46.7	288.3	27.2	25.8	-8.5	328.8	329.4	0.1	10.9	17.6	84.
29.1	72.3	8456.9	350.0	-28.9	-45.0	287.4	30.8	29.4	-9.2	329.7	330.4	0.2	19.4	20.4	88.
30.8	76.3	8982.5	325.0	-33.0	-45.0	285.1	34.2	33.0	-8.9	331.1	331.9	0.2	28.7	23.8	90.
32.8	80.4	9539.6	300.0	-38.1	-50.2	283.5	34.8	33.8	-8.1	331.6	332.0	0.1	26.6	27.6	92.
34.8	84.8	10132.2	275.0	-43.0	99.9	282.9	36.1	35.2	-8.1	332.9	999.9	99.9	999.9	32.4	94.
37.0	89.2	10768.2	250.0	-47.5	99.9	274.4	37.8	37.7	-2.9	335.4	999.9	99.9	999.9	37.0	94.
39.2	94.3	11456.3	225.0	-52.4	99.9	272.8	33.2	33.1	-1.6	338.2	999.9	99.9	999.9	41.7	94.
42.0	99.8	12208.4	200.0	-58.0	99.9	278.0	41.4	41.0	-5.8	341.0	999.9	99.9	999.9	47.7	94.
44.8	105.5	13039.8	175.0	-63.2	99.9	273.1	38.5	38.5	-2.1	345.7	999.9	99.9	999.9	54.3	95.
48.1	112.0	13955.9	150.0	-63.6	99.9	272.4	41.7	41.7	-1.8	360.5	999.9	99.9	999.9	61.8	94.
52.0	119.3	15177.5	125.0	-64.1	99.9	287.2	40.8	39.0	-12.1	379.0	999.9	99.9	999.9	72.7	95.
56.4	127.5	16461.9	100.0	-65.2	99.9	291.0	24.4	22.8	-8.8	401.8	999.9	99.9	999.9	81.7	96.
62.0	137.0	18221.4	75.0	-69.4	99.9	309.0	5.7	4.4	-3.6	427.5	999.9	99.9	999.9	86.7	97.
69.6	147.0	20726.8	50.0	-58.5	99.9	67.6	9.4	-8.7	-3.6	505.6	999.9	99.9	999.9	87.6	97.
81.5	155.3	25211.9	25.0	-47.3	99.9	298.4	6.7	5.9	-3.2	649.2	999.9	99.9	999.9	87.1	98.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 240
LAKE CHARLES, LA

6 MAY 1975
2015 GMT

166 14. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.2	5.0	1007.3	27.2	23.2	160.0	6.2	-2.1	5.8	302.2	350.2	18.1	79.0	0.0	5.
0.2	4.8	69.6	1000.0	26.0	22.4	161.3	7.0	-2.3	6.7	301.5	347.5	17.4	80.7	0.2	347.
1.1	6.6	293.1	975.0	24.2	21.0	164.7	7.5	-2.0	7.3	301.8	344.9	16.3	82.0	0.5	343.
2.1	8.6	520.7	950.0	22.2	20.0	169.3	8.5	-1.6	8.4	301.8	343.6	15.7	87.5	1.0	345.
2.9	10.6	752.8	925.0	20.5	18.4	164.1	7.5	-2.1	7.2	302.3	341.2	14.6	87.4	1.4	346.
3.9	12.6	989.7	900.0	18.7	17.2	173.7	6.7	-0.7	6.7	302.6	339.7	13.9	91.0	1.8	346.
4.8	14.7	1232.1	875.0	17.6	16.3	181.8	6.3	0.2	6.3	303.8	340.2	13.5	92.3	2.2	348.
5.7	16.6	1480.2	850.0	16.0	15.1	198.9	6.7	2.2	6.3	304.7	339.5	12.8	94.2	2.5	350.
6.8	18.9	1734.3	825.0	14.7	10.2	204.0	10.0	4.0	9.1	305.4	331.9	9.6	74.5	3.0	356.
7.8	20.9	1995.1	800.0	14.7	6.9	211.1	9.1	4.7	7.8	307.8	329.9	7.8	59.6	3.5	1.
8.7	23.2	2264.4	775.0	16.1	-6.5	218.6	6.6	4.1	5.2	311.6	320.7	3.0	20.4	3.8	5.
9.7	25.5	2541.8	750.0	14.0	-14.8	233.0	4.5	3.6	2.6	312.0	317.1	1.6	12.2	4.1	8.
10.7	27.8	2825.9	725.0	11.9	-22.9	250.4	3.6	3.4	1.2	312.6	315.3	0.8	7.0	4.2	11.
11.8	30.3	3117.7	700.0	9.2	-22.6	272.4	3.7	3.7	-0.2	312.7	315.6	0.9	8.6	4.3	13.
13.0	32.8	3417.1	675.0	6.5	-22.0	281.9	4.7	4.6	-1.0	313.0	316.2	1.0	10.8	4.3	17.
14.3	35.4	3724.8	650.0	3.7	-23.2	274.2	6.8	6.8	-0.5	313.2	316.2	0.9	11.9	4.4	23.
15.6	37.9	4041.6	625.0	1.8	-24.5	264.6	11.4	11.4	1.1	314.6	317.3	0.8	12.0	4.7	36.
17.0	40.5	4369.6	600.0	-0.4	-20.4	254.3	15.2	14.7	4.1	315.8	319.8	1.3	20.4	5.6	39.
18.4	43.3	4709.6	575.0	-2.4	-17.2	244.7	19.0	17.2	8.1	317.3	322.9	1.7	31.2	6.8	46.
19.7	46.1	5059.9	550.0	-5.0	-10.8	240.2	23.1	20.1	11.5	318.5	328.0	3.1	64.1	9.5	48.
21.1	49.1	5423.9	525.0	-7.8	-18.3	247.5	23.6	21.8	9.0	319.3	324.8	1.7	42.6	10.3	51.
22.5	52.0	5800.9	500.0	-11.0	-56.9	256.7	22.2	21.6	5.1	319.6	319.7	0.0	1.0	12.2	54.
23.9	55.2	6194.7	475.0	-12.2	-57.7	257.9	22.7	22.2	4.8	322.8	322.9	0.0	1.0	13.9	57.
25.3	58.3	6606.0	450.0	-14.8	-59.3	261.7	23.6	23.4	3.4	324.6	324.7	0.0	1.0	15.7	60.
26.9	61.7	7036.8	425.0	-16.9	-60.6	261.4	23.5	23.2	3.5	327.2	327.3	0.0	1.0	17.6	63.
28.7	65.3	7488.7	400.0	-20.0	-63.1	261.4	21.5	21.3	3.2	328.1	328.2	0.0	1.0	20.1	65.
30.4	69.0	7962.2	375.0	-24.8	-65.7	263.2	22.4	22.3	2.7	328.7	328.8	0.0	1.0	22.4	67.
32.3	72.7	8460.8	350.0	-28.5	-68.2	266.2	22.1	22.0	1.5	330.2	330.3	0.0	1.0	24.7	68.
34.2	76.8	8986.9	325.0	-33.2	-46.7	273.1	26.0	25.9	-1.4	330.8	331.5	0.2	24.7	27.4	71.
36.3	81.0	9545.2	300.0	-36.3	-43.2	268.9	32.0	32.0	0.6	334.1	335.2	0.3	48.6	30.8	73.
38.4	85.5	10143.4	275.0	-41.1	99.9	262.6	35.3	35.0	4.6	335.8	999.9	99.9	999.9	34.9	75.
40.5	90.4	10782.9	250.0	-47.0	99.9	260.1	33.0	32.5	5.7	336.2	999.9	99.9	999.9	39.4	75.
42.8	95.6	11470.4	225.0	-53.7	99.9	264.6	37.1	37.0	3.5	336.3	999.9	99.9	999.9	44.0	76.
45.5	101.0	12222.4	200.0	-57.0	99.9	270.2	42.8	42.8	-0.1	342.5	999.9	99.9	999.9	50.7	78.
48.6	107.5	13056.6	175.0	-61.1	99.9	263.7	47.7	47.4	5.2	349.2	999.9	99.9	999.9	59.0	79.
52.3	114.5	14008.2	150.0	-63.4	99.9	262.4	40.9	40.5	5.4	360.9	999.9	99.9	999.9	68.1	79.
56.2	122.3	15117.4	125.0	-66.7	99.9	288.4	32.2	30.6	-10.1	374.3	999.9	99.9	999.9	77.3	81.
61.3	131.5	16459.4	100.0	-68.8	99.9	286.7	23.6	22.6	-6.8	394.8	999.9	99.9	999.9	86.2	84.
67.2	141.3	18169.5	75.0	-71.8	99.9	289.5	15.0	14.1	-5.0	422.5	999.9	99.9	999.9	93.0	86.
76.1	152.5	20643.2	50.0	-58.4	99.9	353.8	4.3	0.7	-4.3	555.9	999.9	99.9	999.9	93.8	86.
89.5	164.0	25037.8	25.0	-48.5	99.9	43.9	2.5	-1.7	-1.8	645.1	999.9	99.9	999.9	93.9	86.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 248
SHREVEPORT, LA

6 MAY 1975
2012 GMT

119 104. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.9	79.0	997.3	29.4	22.9	150.0	5.2	-2.6	4.5	305.2	353.3	17.9	68.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.9	6.3	280.5	975.0	26.8	21.2	159.2	5.2	-1.9	4.9	304.4	348.7	16.5	71.5	0.3	328.
1.6	6.3	510.3	950.0	25.0	21.0	176.8	4.5	-0.3	4.5	304.9	349.8	16.8	78.4	0.5	334.
2.5	10.3	744.6	925.0	22.9	18.8	201.8	4.7	1.8	4.4	304.8	345.1	15.0	77.7	0.7	345.
3.4	12.2	983.3	900.0	20.7	17.0	219.1	5.7	3.6	4.4	304.7	341.9	13.7	79.6	0.9	358.
4.3	14.2	1227.0	875.0	18.9	15.6	217.9	7.3	4.5	5.7	305.2	340.1	12.9	81.1	1.2	8.
5.2	16.1	1476.2	850.0	17.6	14.3	219.6	8.2	5.2	6.3	306.3	339.5	12.2	80.5	1.7	17.
6.3	18.3	1731.5	825.0	16.1	11.3	218.9	6.3	4.0	4.9	306.9	335.4	10.3	73.2	2.1	22.
7.5	20.4	1593.1	800.0	14.8	7.8	226.8	5.2	3.8	3.6	308.0	331.5	8.4	62.9	2.5	25.
8.6	22.5	2261.8	775.0	15.1	-2.4	228.4	2.2	1.6	1.5	310.6	323.0	4.2	30.4	2.7	27.
9.9	24.7	2538.9	750.0	14.3	-8.9	290.5	2.8	2.7	-1.0	312.5	320.4	2.6	19.1	2.8	28.
10.9	26.8	2823.8	725.0	12.3	-9.7	281.9	6.0	5.8	-1.2	313.3	321.1	2.5	20.5	2.9	34.
12.1	29.2	3116.2	700.0	9.7	-11.3	277.0	7.8	7.8	-1.0	313.5	320.7	2.3	21.3	3.1	43.
13.3	31.7	3416.1	675.0	6.3	-13.1	279.8	8.3	8.1	-1.4	312.9	319.4	2.1	23.4	3.5	51.
14.5	34.2	3723.9	650.0	3.6	-13.9	281.8	9.5	9.3	-1.9	313.2	319.5	2.0	26.4	3.9	58.
15.9	36.6	4040.5	625.0	0.6	-14.9	275.8	10.3	10.3	-1.0	313.3	319.3	1.9	30.0	4.6	65.
17.6	39.2	4366.3	600.0	-2.4	-16.3	271.7	10.6	10.6	-0.3	313.5	319.1	1.8	33.6	5.4	70.
19.5	41.7	4702.5	575.0	-5.1	-17.1	263.0	14.3	14.2	1.7	314.2	319.7	1.7	38.2	6.8	74.
21.4	44.4	5050.3	550.0	-7.5	-22.3	257.1	19.6	19.2	4.4	315.3	319.0	1.2	29.4	8.8	75.
23.2	47.3	5411.2	525.0	-8.5	-33.5	258.9	21.7	21.3	4.2	318.3	319.7	0.4	11.0	11.1	75.
25.3	50.2	5789.3	500.0	-8.9	-33.8	258.7	23.4	23.0	4.6	322.2	323.8	0.4	11.1	13.9	76.
27.6	53.1	6184.5	475.0	-11.6	-35.7	252.7	21.1	20.2	6.3	323.6	325.0	0.4	11.4	17.1	76.
29.7	56.0	6596.8	450.0	-14.3	-37.7	254.1	13.8	13.2	3.8	325.2	326.4	0.3	11.6	19.3	76.
31.8	59.3	7027.0	425.0	-18.2	-34.0	257.6	15.9	15.5	3.4	325.6	327.4	0.5	23.4	21.0	76.
34.2	62.7	7477.1	400.0	-21.1	-38.5	261.9	22.3	22.1	3.1	327.5	328.7	0.3	19.0	23.7	76.
37.1	66.0	7949.5	375.0	-25.1	-43.6	262.4	25.9	25.7	3.4	328.3	329.1	0.2	15.8	28.1	77.
39.7	69.7	8446.9	350.0	-29.5	-44.8	268.8	27.2	27.2	0.6	329.0	329.7	0.2	20.8	32.2	78.
42.0	73.3	8970.5	325.0	-34.2	-44.4	268.7	31.8	31.8	6.7	329.5	330.3	0.2	34.6	36.3	80.
45.1	77.5	9525.1	300.0	-38.8	-46.1	265.1	38.7	38.6	3.3	330.7	331.4	0.2	45.3	43.1	81.
50.0	81.5	10117.5	275.0	-42.5	99.9	262.6	44.9*	44.5	5.7	333.7	999.9	99.9	999.9	54.2	81.
54.6	86.0	10754.5	250.0	-47.4	99.9	260.1	38.9*	38.4	6.7	335.6	999.9	99.9	999.9	66.0	81.
59.9	90.8	11445.0	225.0	-52.0	99.9	266.0	46.2*	46.1	3.3	338.8	999.9	99.9	999.9	77.6	82.
66.3	96.0	12198.9	200.0	-57.7	99.9	267.5	47.6*	47.5	2.1	341.4	999.9	99.9	999.9	93.7	83.
72.9	101.5	13034.1	175.0	-61.9	99.9	267.7	53.4**	53.3	2.2	347.8	999.9	99.9	999.9	109.9	84.
81.6	108.9	13986.9	150.0	-62.1	99.9	264.3	66.5**	66.1	6.6	363.2	999.9	99.9	999.9	126.8	84.
95.2	115.3	15112.9	125.0	-63.5	99.9	276.6	46.0**	45.7	-5.3	379.9	999.9	99.9	999.9	143.9	85.
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

*** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 250
BROWNSVILLE, TEX

6 MAY 1975
2015 GMT

161 17. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.6	7.0	1001.0	33.3	14.4	140.0	5.2	-3.3	4.0	307.8	336.6	10.4	32.0	0.0	0.0
0.3	4.7	16.0	1000.0	33.0	16.2	137.4	4.6	-3.1	3.4	307.8	340.9	12.0	38.1	0.0	350.0
1.0	6.7	244.0	975.0	29.5	22.8	181.8	3.9	0.1	3.9	307.4	356.6	18.2	67.1	0.3	312.0
2.0	8.7	476.0	950.0	27.5	21.7	197.6	3.2	1.0	3.0	307.5	354.8	17.5	70.5	0.5	344.0
2.9	10.9	712.4	925.0	25.7	19.6	261.8	4.6	4.6	0.7	307.7	350.5	15.7	69.0	0.6	358.0
3.8	13.1	953.4	900.0	23.1	18.1	289.4	6.0	5.7	-2.0	307.3	347.6	14.8	73.6	0.6	27.0
4.7	15.3	1199.3	875.0	22.3	12.8	306.3	7.0	5.6	-4.1	308.5	338.4	10.8	55.5	0.7	54.0
5.5	17.5	1452.5	850.0	24.0	11.5	294.7	6.4	5.8	-2.7	312.7	341.5	10.1	45.5	0.9	76.0
6.5	19.9	1713.4	825.0	23.6	8.9	252.8	5.4	5.1	1.6	314.8	340.0	8.7	39.1	1.2	32.0
7.2	22.1	1981.3	800.0	22.0	3.7	233.3	7.8	6.3	4.7	315.5	333.9	6.3	30.0	1.5	78.0
8.2	24.6	2255.9	775.0	19.9	0.2	217.5	9.9	6.0	7.9	315.9	320.9	5.0	26.7	1.9	69.0
9.4	26.9	2537.6	750.0	18.7	-5.1	216.5	12.2	7.2	9.8	317.3	328.1	3.5	19.5	2.6	60.0
10.5	29.5	2827.1	725.0	16.4	-6.0	212.2	12.7	6.8	10.7	317.9	328.3	3.4	20.9	3.4	54.0
11.7	32.2	3123.9	700.0	13.9	-8.9	212.3	12.8	6.8	10.8	318.3	327.0	2.8	19.6	4.2	49.0
12.7	34.8	3429.0	675.0	11.7	-10.0	220.4	13.8	9.0	10.5	319.0	327.3	2.6	20.8	5.1	47.0
13.8	37.3	3742.8	650.0	9.0	-12.0	224.0	16.2	11.3	11.7	319.4	326.8	2.3	21.3	6.0	46.0
14.9	40.1	4066.2	625.0	6.7	-7.2	219.3	17.7	11.2	13.7	320.6	331.7	3.6	36.2	7.2	46.0
16.1	42.9	4399.5	600.0	3.4	-8.5	217.7	17.4	10.7	13.8	320.5	330.9	3.3	41.1	8.4	44.0
17.2	45.6	4742.6	575.0	0.1	-18.4	220.9	14.7	9.6	11.1	320.3	325.5	1.6	23.5	9.5	44.0
18.3	48.9	5097.0	550.0	-2.3	-22.0	227.6	13.1	9.7	8.9	321.5	325.4	1.2	20.3	10.4	44.0
19.6	51.9	5464.2	525.0	-5.6	-15.6	236.8	14.7	12.3	8.0	321.9	324.9	2.2	45.3	11.4	45.0
20.8	55.0	5844.5	500.0	-8.7	-26.4	244.1	16.5	14.9	7.2	322.5	325.5	0.9	22.3	12.5	46.0
22.2	58.1	6240.5	475.0	-10.8	-29.2	248.0	19.2	17.8	7.2	324.7	327.2	0.7	20.2	13.9	48.0
23.6	61.6	6655.0	450.0	-13.0	-30.3	242.4	20.2	17.9	5.3	326.9	329.3	0.7	21.8	15.6	50.0
25.1	65.0	7087.6	425.0	-16.8	-32.7	236.1	20.9	17.4	11.7	327.5	329.5	0.6	23.6	17.3	51.0
26.6	68.6	7540.8	400.0	-19.5	-36.7	231.0	22.2	17.3	14.0	329.6	331.1	0.4	19.9	19.4	51.0
28.2	72.2	8016.6	375.0	-23.2	-39.4	239.9	19.2	16.6	9.6	330.8	332.0	0.3	21.1	21.2	51.0
29.9	76.3	8518.4	350.0	-26.5	-40.1	238.7	25.2	21.5	13.1	333.0	334.2	0.3	26.1	23.5	52.0
31.4	80.4	9049.2	325.0	-30.9	-43.3	242.8	30.5	27.1	14.0	334.0	335.0	0.2	28.2	26.1	53.0
33.1	84.9	9610.9	300.0	-36.0	-47.2	245.0	28.9	26.2	12.2	334.6	335.3	0.2	30.0	29.2	54.0
35.1	89.4	10209.4	275.0	-41.2	99.9	249.8	31.1	29.2	10.7	335.6	999.9	99.9	999.9	32.5	56.0
37.5	94.2	10851.7	250.0	-45.2	99.9	247.3	37.0	34.1	14.3	338.8	999.9	99.9	999.9	37.4	57.0
39.8	99.3	11545.4	225.0	-51.1	99.9	256.9	39.6	38.5	9.0	340.2	999.9	99.9	999.9	42.4	59.0
42.8	104.8	12300.8	200.0	-57.4	99.9	253.2	42.7	40.9	12.3	341.8	999.9	99.9	999.9	49.6	61.0
45.9	110.9	13138.9	175.0	-60.0	99.9	264.0	44.8	44.6	4.7	350.9	999.9	99.9	999.9	57.3	64.0
49.3	117.5	14091.8	150.0	-64.2	99.9	256.8	33.8	33.0	7.7	359.4	999.9	99.9	999.9	64.9	66.0
53.2	125.0	15198.5	125.0	-67.5	99.9	265.4	31.2	31.1	2.5	372.8	999.9	99.9	999.9	72.4	67.0
57.9	133.5	16535.4	100.0	-71.8	99.9	271.1	10.1	10.1	-0.2	389.1	999.9	99.9	999.9	77.5	68.0
63.6	142.0	18199.3	75.0	-76.6	99.9	317.4	3.9	2.6	-2.9	412.2	999.9	99.9	999.9	79.4	70.0
72.0	151.3	20677.5	50.0	-58.3	99.9	107.6	0.6	-0.5	0.2	506.3	999.9	99.9	999.9	78.8	70.0
85.2	161.0	25140.3	25.0	-46.4	99.9	70.1	7.8	-7.4	-2.7	651.2	999.9	99.9	999.9	76.0	70.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 255
VICTORIA, TEX

6 MAY 1975
2015 GMT

160 14. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.1	33.0	1000.3	28.3	23.9	180.0	4.2	0.0	4.2	304.0	354.6	19.0	77.0	0.0	0.
0.0	5.1	35.7	1000.0	28.3	23.9	999.9	99.9	99.9	99.9	304.0	354.7	19.0	77.2	999.9	999.
1.1	6.9	261.1	975.0	26.3	24.4	999.9	99.9	99.9	99.9	304.3	358.1	20.2	89.7	999.9	999.
1.9	9.0	490.9	950.0	24.8	23.7	999.9	99.9	99.9	99.9	305.0	358.0	19.9	93.9	999.9	999.
2.7	10.9	725.6	925.0	23.0	22.0	131.2	3.7	-2.8	2.5	305.3	354.4	18.3	93.8	0.7	322.
3.6	13.0	964.8	900.0	21.1	20.1	136.3	3.7	-2.6	2.7	305.5	350.6	16.7	94.2	0.9	320.
4.4	15.1	1239.8	875.0	20.3	19.2	145.6	3.7	-2.1	3.0	307.0	351.0	16.2	93.3	1.0	320.
5.3	17.2	1460.5	850.0	18.8	17.5	144.7	3.8	-2.2	3.1	307.9	349.0	15.1	92.4	1.2	321.
6.3	19.5	1717.1	825.0	16.7	14.1	151.9	4.7	-2.2	4.2	308.0	342.3	12.5	84.9	1.5	322.
7.4	21.5	1980.9	800.0	19.1	5.7	149.7	9.6	-4.8	8.3	312.5	333.4	7.2	41.5	1.9	324.
8.6	23.9	2253.5	775.0	18.7	0.5	148.2	10.6	-5.6	9.0	314.7	329.9	5.2	29.4	2.7	325.
9.6	26.1	2533.6	750.0	16.7	-1.3	157.7	9.6	-3.6	8.8	315.3	329.2	4.6	29.2	3.3	326.
10.8	28.5	2821.1	725.0	14.5	-3.9	174.6	8.8	-0.8	8.7	315.9	327.9	4.0	27.8	3.9	329.
12.0	31.0	3116.2	700.0	12.4	-5.0	190.3	8.3	1.5	8.2	316.7	328.3	3.8	29.3	4.4	334.
13.2	33.6	3419.8	675.0	9.8	-7.2	196.1	9.3	2.6	9.0	317.1	327.2	3.3	29.3	4.9	338.
14.4	35.9	3731.7	650.0	7.0	-3.0	202.1	9.9	3.7	9.2	317.5	331.8	4.7	49.0	5.5	343.
15.7	38.6	4052.7	625.0	3.8	1.1	210.5	11.3	5.7	9.7	317.7	337.4	6.7	82.3	6.1	348.
17.0	41.1	4383.6	600.0	1.7	-1.3	210.8	14.8	7.6	12.7	318.8	336.2	5.8	80.5	6.8	354.
18.3	44.3	4725.3	575.0	-0.8	-9.7	213.4	18.0	9.9	15.0	319.4	329.3	3.2	50.6	7.9	360.
19.7	46.9	5078.3	550.0	-4.3	-12.0	219.7	19.3	12.4	14.9	319.4	328.1	2.8	54.9	9.4	6.
21.0	49.9	5443.2	525.0	-7.0	-16.0	230.6	21.8	16.8	13.8	320.2	326.9	2.1	48.7	10.6	11.
22.5	52.8	5822.4	500.0	-9.4	-25.6	237.7	23.9	20.2	12.8	321.7	324.9	0.9	25.3	12.1	18.
23.8	55.7	6217.1	475.0	-11.6	-35.0	238.5	24.5	20.9	12.8	323.6	325.0	0.4	12.4	13.8	23.
25.5	59.0	6628.9	450.0	-14.4	-37.6	247.1	24.1	22.2	9.4	325.1	326.3	0.3	11.8	15.6	29.
27.2	62.4	7050.0	425.0	-17.0	-43.4	249.6	25.2	23.7	8.8	327.1	327.8	0.2	7.9	17.5	34.
28.7	65.8	7512.2	400.0	-20.1	-45.5	251.4	27.5	26.1	8.8	328.9	329.5	0.2	8.2	19.7	38.
30.6	69.4	7987.0	375.0	-24.2	-38.9	253.8	26.5	25.5	7.4	329.5	330.8	0.3	24.0	22.1	43.
32.3	73.0	8485.3	350.0	-29.0	-41.2	254.4	28.8	27.7	7.7	329.5	330.6	0.3	29.6	24.5	46.
34.1	77.0	9010.9	325.0	-32.6	-38.9	254.7	31.5	30.4	8.3	331.7	333.2	0.4	52.8	27.5	49.
36.2	81.2	9571.3	300.0	-36.1	-42.4	252.1	34.3	32.7	10.6	334.5	335.6	0.3	51.8	31.0	52.
38.2	85.4	10170.3	275.0	-40.5	99.9	247.9	37.6	34.8	14.2	336.6	999.9	99.9	999.9	35.2	55.
40.2	90.0	10811.9	250.0	-45.9	99.9	251.0	39.1	36.9	12.7	337.8	999.9	99.9	999.9	39.9	56.
42.6	95.2	11503.1	225.0	-52.2	99.9	254.7	38.9	37.5	10.3	338.5	999.9	99.9	999.9	45.0	58.
45.3	100.4	12255.0	200.0	-57.5	99.9	255.7	44.7	43.3	11.1	341.7	999.9	99.9	999.9	52.0	61.
48.4	106.3	13094.7	175.0	-59.6	99.9	257.1	39.5	38.5	8.8	351.6	999.9	99.9	999.9	59.4	63.
51.8	112.8	14053.2	150.0	-61.2	99.9	255.4	42.1	40.7	10.6	364.7	999.9	99.9	999.9	67.7	64.
56.1	120.3	15169.4	125.0	-66.0	99.9	273.9	35.9	35.8	-2.4	375.5	999.9	99.9	999.9	78.0	66.
60.8	128.7	16514.5	100.0	-70.1	99.9	273.3	26.8	26.8	-1.5	392.4	999.9	99.9	999.9	84.8	72.
66.8	138.0	19291.8	75.0	-74.6	99.9	276.6	13.8	13.7	-1.6	416.5	999.9	99.9	999.9	90.0	71.
75.2	148.0	20670.2	50.0	-60.5	99.9	250.1	26.5	24.9	9.0	500.9	999.9	99.9	999.9	89.6	70.
90.0	159.3	25114.6	25.0	-46.9	99.9	303.0	5.3	4.5	-2.9	649.8	999.9	99.9	999.9	89.0	71.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 260
STEPHENVILLE, TEX

6 MAY 1975
2015 GMT

160 21. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	10.0	399.0	960.4	27.5	4.5	190.7	3.0	0.5	3.0	304.9	320.6	5.5	23.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.4	10.3	495.2	950.0	26.6	5.8	353.4	4.1	0.5	-4.1	305.0	322.3	6.1	26.7	7.1	135.
1.4	13.2	729.2	925.0	24.4	4.7	359.4	5.5	0.1	-5.5	305.1	321.5	5.8	27.8	7.5	176.
2.3	15.5	568.0	900.0	22.1	2.9	4.9	4.5	-0.4	-4.4	305.0	319.9	5.3	28.3	0.7	178.
3.4	17.9	1211.4	875.0	20.1	1.1	359.0	4.3	0.1	-4.3	305.4	319.0	4.8	28.1	1.0	181.
4.2	20.3	1461.4	850.0	18.6	-2.1	347.4	5.7	1.2	-5.5	306.1	317.4	3.9	24.5	1.3	179.
5.1	22.3	1715.4	825.0	16.8	-4.5	339.4	5.5	1.9	-5.2	306.8	316.6	3.3	22.8	1.6	176.
6.0	25.3	1976.6	800.0	15.2	-5.6	316.0	3.0	2.1	-2.2	307.8	317.1	3.2	23.3	1.8	173.
6.8	27.8	2244.2	775.0	13.0	0.3	250.6	4.2	4.0	1.4	308.5	323.2	5.1	41.8	1.8	169.
7.8	30.6	2519.1	750.0	10.8	7.1	234.5	8.8	7.1	5.1	309.5	333.5	8.5	77.7	1.7	157.
8.7	33.3	2801.8	725.0	9.6	4.7	230.8	12.2	9.4	7.7	310.9	332.3	7.5	71.9	1.7	136.
9.8	35.9	3092.6	700.0	7.7	-0.4	225.9	14.7	10.6	10.2	311.7	327.4	5.3	56.4	1.9	110.
10.8	38.8	3391.8	675.0	5.6	2.0	218.5	16.9	10.5	13.2	312.7	331.9	6.6	77.9	2.5	88.
11.8	41.5	3699.5	650.0	2.9	-0.2	211.4	18.8	9.8	16.0	313.0	330.1	5.8	79.9	3.2	73.
12.8	44.5	4016.5	625.0	1.3	-6.6	207.4	21.1	9.7	18.7	314.4	325.7	3.8	56.0	4.2	62.
13.8	47.6	4344.1	600.0	-0.9	-8.5	210.5	22.5	11.4	19.4	315.5	325.8	3.4	56.1	5.4	53.
14.9	50.5	4682.5	575.0	-3.8	-11.8	214.6	22.1	12.6	18.2	315.8	324.2	2.7	53.5	6.8	49.
16.0	53.3	5031.4	550.0	-7.3	-13.8	218.5	22.7	14.1	17.8	315.7	323.1	2.4	59.9	8.2	46.
17.3	56.9	5391.7	525.0	-10.6	-16.4	221.3	23.9	15.8	18.0	315.9	322.2	2.0	62.2	10.0	46.
18.5	60.4	5766.0	500.0	-12.6	-33.6	224.0	25.2	17.5	18.2	317.7	319.3	0.5	15.6	11.7	45.
19.7	63.9	6156.1	475.0	-14.2	-37.2	226.4	30.2	21.9	20.8	320.3	321.5	0.3	12.2	13.8	45.
21.1	67.3	6564.4	450.0	-16.6	-38.9	225.3	31.1	22.1	21.9	322.3	323.4	0.3	12.4	16.3	45.
22.5	70.9	6991.7	425.0	-19.5	-39.9	229.6	30.5	23.2	19.8	324.0	325.0	0.3	14.2	19.1	45.
24.0	74.7	7439.6	400.0	-22.5	-42.3	240.1	31.2	27.0	15.5	325.6	326.5	0.2	14.5	21.7	47.
25.5	78.8	7910.1	375.0	-25.6	-44.6	244.9	37.8	34.2	16.1	327.6	328.3	0.2	14.8	24.8	49.
27.2	82.8	8407.1	350.0	-29.2	-44.9	247.9	42.6	30.5	16.0	329.3	330.0	0.2	20.2	28.5	51.
28.9	87.0	8931.9	325.0	-33.6	-42.9	244.0	46.0	41.4	20.1	330.3	331.3	0.3	38.3	33.1	53.
30.8	91.6	9488.0	300.0	-38.7	-48.7	241.2	46.0	40.3	22.1	330.7	331.3	0.1	33.5	38.0	54.
32.7	96.2	10080.5	275.0	-42.5	99.9	238.0	55.2	46.8	25.2	333.6	999.9	99.9	999.9	43.8	55.
34.7	101.0	10717.5	250.0	-47.6	99.9	239.2	46.2	39.7	23.7	335.3	999.9	99.9	999.9	45.8	55.
37.0	106.5	11407.0	225.0	-51.8	99.9	245.5	46.3	42.1	19.2	339.1	999.9	99.9	999.9	56.3	56.
39.6	112.3	12162.0	200.0	-56.7	99.9	244.6	45.4*	41.0	19.5	343.0	999.9	99.9	999.9	64.2	57.
42.6	118.3	13003.1	175.0	-58.8	99.9	246.3	54.8*	50.1	22.1	352.9	999.9	99.9	999.9	72.4	58.
45.8	125.3	13968.3	150.0	-60.7	99.9	245.7	49.1*	44.7	20.2	365.6	999.9	99.9	999.9	80.6	59.
49.6	132.3	15102.3	125.0	-60.8	99.9	257.9	56.5*	55.3	11.9	384.9	999.9	99.9	999.9	91.5	61.
54.4	140.0	16479.6	100.0	-61.5	99.9	257.8	24.4*	23.8	5.1	409.0	999.9	99.9	999.9	100.8	64.
60.0	148.3	18229.1	75.0	-68.8	99.9	269.5	8.9*	8.9	0.1	428.8	999.9	99.9	999.9	108.0	65.
67.6	157.7	20732.2	50.0	-58.0	99.9	23.0	5.6*	-2.2	-5.2	506.9	999.9	99.9	999.9	106.9	64.
79.2	167.5	25174.4	25.0	-48.6	99.9	999.9	99.9	99.9	99.9	645.1	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 261
DEL RIO, TEX

6 MAY 1975
2015 GMT

121 132. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	8.9	314.0	969.8	32.8	2.8	350.0	6.2	1.1	-6.1	309.3	323.4	4.8	15.0	0.0	0.
99.9	99.9	99.9	1700.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.6	10.6	498.2	950.0	29.9	7.5	335.8	7.8	3.2	-7.1	308.5	328.1	6.9	24.7	0.4	161.
1.6	12.9	735.3	925.0	28.3	6.1	348.7	6.2	1.2	-6.1	309.1	327.5	6.4	24.6	0.8	159.
2.6	15.2	976.9	900.0	25.5	3.9	355.6	7.1	0.5	-7.1	308.6	324.9	5.6	24.7	1.2	165.
3.6	17.5	1223.3	875.0	23.4	3.1	355.4	5.5	0.4	-5.5	308.8	324.6	5.5	26.6	1.5	169.
4.5	20.0	1474.8	850.0	21.1	0.5	325.5	6.5	3.7	-5.4	308.9	322.5	4.7	25.3	1.9	168.
5.3	22.2	1732.5	825.0	19.6	-0.7	293.0	5.2	4.8	-2.0	309.9	322.8	4.4	25.4	2.1	163.
6.2	24.8	1996.0	800.0	17.6	-2.4	262.6	5.6	5.6	0.7	310.4	322.3	4.0	25.5	2.2	156.
7.2	27.2	2266.2	775.0	15.6	-4.1	249.2	7.3	6.8	2.6	311.1	322.0	3.7	25.5	2.3	147.
7.9	29.9	2542.8	750.0	12.9	-6.3	244.5	8.7	7.8	3.7	311.0	320.6	3.2	25.6	2.4	139.
8.7	32.6	2826.8	725.0	11.4	-9.1	235.4	9.4	7.8	5.4	312.3	320.4	2.7	22.9	2.5	128.
9.5	35.3	3118.7	700.0	9.1	-12.1	225.9	9.5	6.8	6.6	312.9	319.6	2.2	20.8	2.6	118.
10.6	37.9	3418.4	675.0	7.0	-12.5	217.4	9.7	5.9	7.7	313.7	320.4	2.2	23.4	2.8	106.
11.6	40.6	3727.0	650.0	4.2	-15.8	221.2	10.5	6.9	7.9	313.9	319.4	1.7	21.6	3.1	96.
12.7	43.5	4045.0	625.0	2.9	-17.9	232.7	13.2	10.5	8.0	316.0	320.8	1.5	19.8	3.7	86.
13.8	46.5	4374.9	600.0	2.1	-18.5	237.4	14.5	12.3	7.8	318.7	323.5	1.5	19.9	4.5	80.
15.0	49.5	4716.7	575.0	-0.6	-20.7	241.8	15.1	13.3	7.1	319.4	323.6	1.3	20.1	5.5	78.
16.2	52.6	5070.3	550.0	-3.1	-22.7	240.9	17.5	15.3	8.5	320.6	324.3	1.1	20.2	6.6	74.
17.4	55.7	5436.9	525.0	-5.7	-24.3	238.6	18.4	15.7	9.6	321.7	325.1	1.0	21.3	8.0	71.
18.9	59.0	5817.1	500.0	-8.6	-26.5	241.1	19.3	16.9	9.5	322.6	325.6	0.9	21.9	9.5	70.
20.4	62.4	6212.8	475.0	-11.4	-28.8	236.8	22.4	18.7	12.3	323.9	326.4	0.7	22.1	11.4	68.
21.8	65.9	6625.1	450.0	-14.3	-31.9	239.5	23.3	20.1	11.8	325.3	327.3	0.6	20.7	13.3	66.
23.3	69.6	7055.6	425.0	-17.7	-34.7	237.8	26.9	22.8	14.4	326.3	328.0	0.5	20.7	15.6	65.
24.7	73.1	7506.3	400.0	-21.3	-37.7	237.0	28.1	23.6	15.3	327.3	328.6	0.4	21.0	17.8	64.
26.2	77.2	7978.8	375.0	-25.0	-40.8	241.2	29.0	25.4	14.0	328.4	329.5	0.3	21.2	20.3	63.
27.8	81.0	8477.1	350.0	-28.3	-40.9	246.8	42.2	38.7	16.6	330.6	331.7	0.3	28.2	23.6	64.
29.5	85.3	9003.5	325.0	-33.3	-43.5	248.3	37.0	34.4	13.7	330.8	331.7	0.2	34.5	27.8	64.
31.3	89.6	9500.9	300.0	-37.6	-44.4	245.2	40.2	36.5	16.9	332.3	333.2	0.2	48.4	32.1	65.
33.1	94.4	10157.5	275.0	-40.8	99.9	227.7	44.9	37.9	24.0	336.1	999.9	99.9	999.9	36.4	64.
35.0	99.2	10797.9	250.0	-46.9	99.9	232.9	38.9	31.0	23.5	336.3	999.9	99.9	999.9	41.2	63.
37.3	104.4	11488.1	225.0	-52.1	99.9	240.3	43.2	37.5	21.4	338.7	999.9	99.9	999.9	46.9	62.
39.8	110.2	12242.3	200.0	-56.8	99.9	243.7	49.0	43.9	21.7	342.8	999.9	99.9	999.9	54.1	62.
42.5	116.0	13081.8	175.0	-58.1	99.9	247.7	44.3	41.0	16.8	354.1	999.9	99.9	999.9	61.7	63.
45.9	123.0	14049.6	150.0	-57.7	99.9	245.7	46.9	42.7	19.3	370.6	999.9	99.9	999.9	70.4	63.
99.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 265
MIDLAND, TEX

6 MAY 1975
2015 GMT

158 15. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	12.2	873.0	909.6	24.7	-5.5	240.7	7.2	6.2	3.6	306.4	314.7	2.8	13.0	0.7	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.3	13.0	965.4	900.0	22.5	-0.7	244.4	10.7	9.6	4.6	305.3	317.0	4.1	21.3	0.2	77.
1.0	15.3	1209.1	875.0	19.9	-1.9	238.6	8.6	7.3	4.5	305.0	316.0	3.8	22.9	0.5	69.
1.8	17.5	1457.4	850.0	17.4	-3.9	222.9	9.0	6.2	6.6	304.9	314.7	3.4	23.0	0.8	60.
2.7	19.9	1710.8	825.0	14.9	-5.9	233.2	9.0	7.2	5.4	304.8	313.5	3.0	23.1	1.3	54.
3.8	22.1	1965.9	800.0	12.5	-6.9	235.7	10.8	8.9	6.1	304.9	313.3	2.9	25.2	2.0	55.
4.8	24.5	2235.0	775.0	10.4	-7.6	246.1	12.0	10.9	4.8	305.4	313.6	2.8	27.3	2.7	56.
5.7	26.8	2507.2	750.0	9.1	-10.1	251.2	14.8	14.0	4.8	306.8	313.9	2.4	24.5	3.4	59.
6.7	29.4	2787.1	725.0	7.3	-11.7	251.9	16.7	15.9	5.2	307.7	314.2	2.1	24.3	4.3	61.
7.5	32.0	3074.0	700.0	4.4	-13.5	255.0	17.7	17.0	4.6	307.6	313.5	1.9	25.8	5.2	64.
8.3	34.8	3368.6	675.0	1.6	-15.2	257.5	17.8	17.4	3.8	307.7	313.0	1.7	27.2	6.0	65.
9.2	37.3	3671.5	650.0	-0.5	-18.3	257.0	18.1	17.7	4.1	308.5	312.9	1.4	24.6	6.9	67.
10.0	40.1	3984.5	625.0	-1.3	-21.2	250.3	18.5	17.5	6.2	311.1	314.7	1.1	20.2	7.8	68.
11.0	42.9	4308.6	600.0	-3.4	-22.9	242.3	20.0	17.7	9.3	312.3	315.6	1.0	20.3	9.0	68.
12.2	45.9	4643.8	575.0	-5.7	-24.3	236.5	20.8	17.3	11.5	313.4	316.4	0.9	21.4	10.4	67.
13.6	48.9	4991.4	550.0	-6.9	-25.9	233.2	23.4	18.8	14.0	316.0	318.8	0.8	20.2	12.2	65.
15.0	51.9	5352.8	525.0	-9.3	-28.0	231.3	24.8	19.4	15.5	317.3	319.7	0.7	20.2	14.3	63.
16.2	55.1	5727.9	500.0	-12.1	-30.2	232.9	25.8	20.6	15.5	318.3	320.4	0.6	20.5	15.9	62.
17.4	58.3	6117.6	475.0	-15.5	-32.4	233.3	26.9	21.5	16.1	318.8	320.6	0.5	21.9	17.9	61.
18.9	61.7	6523.4	450.0	-18.4	-34.8	238.6	28.1	24.0	14.6	320.1	321.6	0.4	22.1	20.3	60.
20.3	65.3	6948.4	425.0	-20.7	-38.4	238.9	27.9	23.9	14.4	322.4	323.6	0.3	18.6	22.7	60.
21.9	68.9	7395.0	400.0	-22.8	-40.1	242.8	33.7	30.0	15.4	325.3	326.4	0.3	18.7	25.5	60.
23.5	72.6	7865.6	375.0	-26.0	-42.7	240.9	41.4	36.2	20.1	327.2	328.0	0.2	18.9	29.3	60.
25.2	76.7	8360.9	350.0	-30.2	-45.5	237.5	41.3	34.9	22.2	328.0	328.6	0.2	20.6	33.3	60.
26.7	80.9	8883.5	325.0	-34.8	-49.4	234.6	45.6	37.1	26.4	328.6	329.1	0.1	20.9	37.5	60.
28.5	85.3	9436.8	300.0	-39.9	99.9	225.3	44.8	36.9	25.5	329.1	999.9	99.9	999.9	42.2	59.
30.5	89.8	10025.5	275.0	-44.3	99.9	237.2	42.7	33.9	23.1	331.1	999.9	99.9	999.9	47.1	59.
32.6	94.9	10658.9	250.0	-47.5	99.9	241.1	48.7*	42.6	23.5	335.5	999.9	99.9	999.9	53.1	59.
34.9	100.7	11348.9	225.0	-51.4	99.9	241.0	47.2*	41.3	22.9	339.7	999.9	99.9	999.9	60.0	59.
37.3	105.8	12105.2	200.0	-55.6	99.9	238.7	51.3*	43.9	26.6	344.7	999.9	99.9	999.9	66.8	59.
40.1	112.0	12953.3	175.0	-56.2	99.9	238.5	45.0*	38.4	23.5	357.1	999.9	99.9	999.9	75.1	59.
43.2	119.0	13928.8	150.0	-57.6	99.9	245.7	38.8*	35.4	16.0	370.9	999.9	99.9	999.9	82.3	59.
46.8	126.7	15080.4	125.0	-60.2	99.9	256.7	50.0*	48.7	11.5	386.0	999.9	99.9	999.9	92.5	60.
51.2	135.7	16457.5	100.0	-63.7	99.9	243.3	24.1*	21.5	10.8	404.7	999.9	99.9	999.9	101.2	62.
56.2	144.3	18201.5	75.0	-66.6	99.9	236.7	19.0*	15.9	10.5	433.3	999.9	99.9	999.9	108.0	61.
64.1	154.5	20725.6	50.0	-58.6	99.9	241.5	1.5*	1.3	0.7	505.3	999.9	99.9	999.9	107.8	61.
76.1	165.0	25184.8	25.0	-46.9	99.9	258.3	5.1	5.0	1.0	649.9	999.9	99.9	999.9	106.1	61.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 270
EL PASO, TFX

6 MAY 1975
2100 GMT

146 19. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	15.4	1193.0	876.1	20.5	-12.1	240.0	6.2	5.4	3.1	305.2	310.5	1.7	10.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.0	15.5	1203.8	875.0	20.0	-11.2	243.1	6.6	5.9	3.0	304.8	310.5	1.9	11.5	0.0	9.
1.1	17.6	1450.3	850.0	15.0	-6.8	259.3	8.7	6.5	1.6	302.2	310.1	2.7	21.5	0.7	71.
2.2	19.9	1701.6	825.0	12.5	-8.8	264.1	5.6	5.6	0.6	302.1	309.1	2.4	21.6	1.2	70.
3.2	22.1	1958.3	800.0	10.2	-9.1	251.7	8.2	7.8	2.6	302.3	309.4	2.4	24.6	1.5	77.
4.1	24.6	2221.0	775.0	7.4	-11.4	256.9	9.4	9.1	2.1	302.0	308.1	2.1	24.7	2.0	75.
4.9	26.7	2489.5	750.0	4.8	-11.6	283.1	8.9	8.7	-2.0	302.1	309.3	2.1	29.1	2.4	78.
5.9	29.3	2764.8	725.0	2.5	-13.3	278.4	11.4	11.3	-1.7	302.4	308.1	1.9	29.9	2.9	83.
6.9	31.9	3047.1	700.0	0.1	-15.4	265.8	18.4	18.3	1.3	302.6	307.8	1.6	29.9	3.8	85.
7.4	34.5	3337.7	675.0	-1.5	-18.3	267.4	17.9	17.9	0.8	304.1	308.2	1.3	26.5	4.4	85.
8.1	37.1	3637.5	650.0	-2.2	-24.9	266.9	17.4	17.4	0.9	306.6	309.1	0.8	15.5	5.1	86.
9.1	39.9	3947.7	625.0	-4.3	-26.5	261.7	19.1	18.9	2.8	307.5	309.8	0.7	15.7	6.1	85.
10.7	42.5	4268.0	600.0	-6.2	-28.0	251.6	22.0	20.9	7.0	308.9	311.0	0.6	15.9	8.2	83.
12.5	45.5	4600.0	575.0	-7.8	-29.2	248.8	25.2	23.5	9.1	310.9	312.8	0.6	15.9	10.8	80.
13.8	48.5	4943.9	550.0	-10.3	-31.1	250.8	21.2	20.0	7.0	311.9	313.6	0.5	16.1	12.5	78.
14.8	51.4	5300.6	525.0	-12.5	-33.2	252.4	24.3	23.1	7.2	313.3	314.8	0.4	15.7	13.8	78.
16.0	54.6	5671.3	500.0	-15.4	-35.5	247.1	25.6	23.6	9.9	314.2	315.5	0.4	16.0	15.7	77.
17.3	57.9	6056.1	475.0	-18.5	-37.9	241.7	26.2	23.1	12.4	315.1	316.1	0.3	16.2	17.6	75.
18.5	61.3	6457.4	450.0	-21.3	-38.4	244.1	27.8	25.0	12.1	316.5	317.5	0.3	19.5	19.5	74.
19.8	64.9	6876.6	425.0	-24.1	-40.7	242.2	29.0	25.6	13.5	318.1	319.0	0.3	19.7	21.5	73.
21.1	68.3	7316.4	400.0	-27.0	-42.9	242.5	35.1	31.1	16.2	319.8	320.6	0.2	20.4	24.2	72.
22.6	72.0	7778.3	375.0	-30.8	-45.4	242.2	32.4	28.7	15.2	320.8	321.5	0.2	21.9	27.2	71.
24.1	76.0	8264.3	350.0	-35.0	-48.8	241.6	36.2	31.8	17.2	321.5	322.0	0.1	22.6	30.1	70.
25.6	80.1	8776.5	325.0	-39.4	99.9	240.2	34.3	29.8	17.0	322.3	999.9	99.9	999.9	33.3	69.
27.3	84.5	9319.0	300.0	-43.9	99.9	242.0	34.0	30.0	16.0	323.5	999.9	99.9	999.9	36.5	68.
29.3	89.0	9897.2	275.0	-48.3	99.9	242.1	41.5	36.6	19.4	325.2	999.9	99.9	999.9	41.4	68.
31.2	94.0	10521.1	250.0	-50.7	99.9	242.4	50.4	44.7	23.3	330.7	999.9	99.9	999.9	46.8	67.
33.0	99.2	11202.7	225.0	-54.3	99.9	241.7	45.9	40.4	21.8	335.2	999.9	99.9	999.9	51.7	67.
35.4	104.8	11954.5	200.0	-56.3	99.9	237.2	58.1*	48.8	31.5	343.6	999.9	99.9	999.9	58.8	65.
37.9	110.8	12806.1	175.0	-54.7	99.9	241.1	35.9*	31.4	17.3	359.6	999.9	99.9	999.9	66.8	65.
40.6	117.5	13792.8	150.0	-55.9	99.9	243.4	52.5*	46.9	23.5	373.9	999.9	99.9	999.9	72.9	65.
44.1	125.0	14548.0	125.0	-57.4	99.9	238.5	25.4*	21.6	13.3	391.1	999.9	99.9	999.9	81.3	64.
48.1	133.0	16341.1	100.0	-62.6	99.9	241.6	29.4*	25.9	14.0	406.9	999.9	99.9	999.9	87.8	64.
54.5	141.0	18111.8	75.0	-67.3	99.9	244.2	4.0*	3.6	1.8	431.7	999.9	99.9	999.9	94.6	64.
62.4	149.3	20630.6	50.0	-58.2	99.9	35.8	6.5	-3.8	-5.3	506.4	999.9	99.9	999.9	94.3	65.
76.2	158.0	25100.3	25.0	-46.3	99.9	341.7	3.9	1.2	-3.7	651.4	999.9	99.9	999.9	90.6	65.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 327
NASHVILLE, TENN

6 MAY 1975
2015 GMT

164 16. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.1	183.0	991.3	17.4	16.8	180.0	1.0	0.0	1.0	292.9	324.5	12.2	96.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.4	7.4	322.3	975.0	17.5	17.0	291.2	6.5	6.1	-2.3	294.5	327.2	12.6	96.5	0.5	358.
1.3	5.5	545.0	950.0	16.8	15.3	238.0	8.3	7.6	4.4	295.8	326.3	11.6	91.0	7.5	26.
2.1	11.5	773.0	925.0	16.8	12.8	237.5	10.5	8.8	5.6	297.9	324.8	10.1	76.9	1.1	40.
3.0	13.8	1006.7	900.0	16.4	10.6	235.4	8.1	6.7	4.6	299.6	323.8	8.9	68.2	1.6	46.
4.0	15.8	1246.7	875.0	15.4	9.4	240.7	5.7	5.0	2.8	300.9	324.1	8.5	67.2	1.9	48.
4.9	18.1	1492.2	850.0	14.5	7.5	279.7	4.3	4.3	-0.7	302.4	323.6	7.7	62.8	2.2	52.
5.9	20.4	1744.3	825.0	12.8	6.7	293.0	4.2	3.9	-1.6	303.2	323.9	7.5	66.3	2.3	57.
7.1	22.5	2012.2	800.0	10.7	5.4	299.1	4.5	4.0	-2.2	303.5	323.2	7.1	69.9	2.5	63.
8.1	25.0	2265.8	775.0	7.8	3.2	302.3	4.5	3.8	-2.4	303.0	320.5	6.3	72.9	2.6	68.
9.1	27.3	2536.4	750.0	6.4	3.5	250.9	3.3	3.1	-1.2	304.4	322.9	6.6	81.3	2.8	72.
10.2	29.9	2813.8	725.0	4.0	2.8	247.1	2.0	1.8	0.8	304.7	322.9	6.5	91.8	3.0	73.
11.3	32.6	3099.0	700.0	2.1	1.8	235.0	2.9	2.3	1.6	305.6	323.4	6.3	98.0	3.1	72.
12.6	35.2	3392.3	675.0	0.4	0.4	252.6	6.7	6.4	2.0	306.8	323.5	5.9	100.2	3.4	71.
13.8	37.8	3695.2	650.0	-0.2	-0.4	254.2	9.8	9.4	2.7	309.5	326.1	5.7	98.1	4.1	72.
15.1	40.5	4008.9	625.0	-2.4	-2.4	253.6	12.2	11.7	3.4	310.3	325.3	5.1	100.2	4.9	72.
16.5	43.4	4332.2	600.0	-4.3	-4.3	251.1	14.5	13.7	4.7	311.7	325.4	4.6	100.8	6.1	72.
18.0	46.5	4667.3	575.0	-5.9	-5.9	248.6	14.2	13.7	5.2	313.6	326.4	4.3	100.6	7.3	72.
19.4	49.7	5014.7	550.0	-7.9	-8.0	243.3	14.7	13.1	6.6	315.1	326.7	3.8	99.3	8.5	71.
20.8	52.7	5375.5	525.0	-10.1	-10.4	242.3	14.8	13.1	6.9	316.6	326.7	3.3	97.5	9.7	70.
22.2	55.9	5750.7	500.0	-12.1	-12.8	241.5	15.0	13.2	7.2	318.6	327.5	2.9	95.0	11.0	69.
23.6	59.3	6141.6	475.0	-14.7	-15.6	240.9	14.7	12.8	7.1	320.1	327.6	2.4	92.8	12.3	68.
25.3	63.7	6549.2	450.0	-17.5	-18.7	242.8	15.2	13.5	7.0	321.4	327.7	1.9	90.4	13.7	68.
26.8	66.5	6975.5	425.0	-20.3	-21.8	239.1	15.3	13.2	7.9	323.0	328.2	1.6	88.3	15.1	67.
28.4	70.4	7421.9	400.0	-23.5	-25.5	242.4	16.8	14.9	7.8	324.5	328.5	1.2	83.4	16.7	66.
30.2	74.4	7890.6	375.0	-27.2	-29.2	236.1	16.5	13.7	9.2	325.7	328.8	0.9	82.3	18.4	66.
32.0	78.7	8384.7	350.0	-30.6	-33.3	235.7	18.1	15.0	10.2	327.5	329.8	0.6	76.3	20.3	65.
33.9	83.2	8906.6	325.0	-35.1	-39.1	248.8	16.0	14.9	5.8	328.3	329.7	0.4	66.2	22.2	64.
36.0	87.8	9459.3	300.0	-39.9	99.9	258.2	16.0	15.7	3.3	329.2	999.9	99.9	999.9	24.1	65.
38.1	92.8	10047.2	275.0	-45.2	99.9	275.0	14.0	14.0	-1.2	329.7	999.9	99.9	999.9	25.9	67.
40.4	98.0	10675.9	250.0	-50.7	99.9	285.6	20.1	19.4	-5.4	330.7	999.9	99.9	999.9	27.9	69.
43.2	103.8	11355.9	225.0	-55.4	99.9	298.8	22.8	20.0	-11.0	333.6	999.9	99.9	999.9	30.7	74.
46.2	110.0	12097.1	200.0	-61.1	99.9	294.6	22.3	20.3	-9.3	336.0	999.9	99.9	999.9	33.9	79.
49.3	116.3	12915.8	175.0	-66.7	99.9	281.5	26.4	25.9	-5.3	339.9	999.9	99.9	999.9	38.0	81.
52.9	123.7	13847.7	150.0	-64.5	99.9	285.5	31.8	30.7	-8.5	358.9	999.9	99.9	999.9	43.5	84.
57.1	131.3	14560.9	125.0	-64.9	99.9	293.4	26.8	25.1	-9.3	377.6	999.9	99.9	999.9	50.5	88.
62.5	139.3	16331.1	100.0	-59.1	99.9	295.1	22.5	20.4	-9.6	413.6	999.9	99.9	999.9	57.3	91.
69.3	147.3	18122.9	75.0	-59.5	99.9	336.3	6.8	2.7	-6.3	448.3	999.9	99.9	999.9	62.8	94.
79.8	156.3	23647.8	50.0	-60.1	99.9	72.2	5.5	-5.2	-1.7	501.8	999.9	99.9	999.9	63.3	96.
96.0	165.5	25058.9	25.0	-51.9	99.9	326.1	0.5	0.3	-0.4	635.6	999.9	99.9	999.9	63.2	96.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 340
LITTLE ROCK, ARK

6 MAY 1975
2100 GMT

153 18. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.1	79.0	978.0	25.0	19.4	200.0	5.2	1.8	4.9	300.3	338.3	14.4	71.0	0.0	0.
09.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.5	8.2	284.3	975.0	23.6	20.7	244.6	6.0	5.4	2.6	301.1	343.4	16.0	83.8	0.3	11.
1.4	10.4	511.5	950.0	21.6	19.8	208.3	7.4	3.5	6.5	301.2	342.4	15.5	89.6	0.6	28.
2.2	12.6	743.1	925.0	20.2	18.8	208.9	8.4	4.1	7.4	302.0	341.8	15.0	91.5	1.0	27.
3.1	15.0	980.1	900.0	19.0	18.2	208.7	10.0	4.8	8.8	303.1	342.7	14.8	95.1	1.5	28.
4.0	17.3	1222.1	875.0	16.6	15.5	214.5	10.4	5.9	8.6	302.8	337.3	12.8	93.2	2.0	28.
4.8	19.7	1469.2	850.0	15.1	13.1	217.3	11.3	6.8	9.0	303.5	333.9	11.2	87.7	2.5	30.
5.6	21.9	1722.2	825.0	13.6	11.4	217.7	11.4	7.0	9.1	304.4	332.7	10.3	86.4	3.1	31.
6.5	24.6	1981.5	800.0	11.8	7.7	216.4	11.5	6.8	9.3	304.8	327.9	8.3	76.2	3.7	32.
7.3	26.9	2247.5	775.0	11.0	7.6	212.0	11.0	5.8	9.3	306.7	330.4	8.5	79.6	4.2	33.
8.3	29.6	2521.1	750.0	9.7	5.2	209.3	9.8	4.8	8.5	308.1	329.1	7.4	73.5	4.8	32.
9.2	32.3	2802.2	725.0	7.5	3.5	216.8	9.0	5.4	7.2	308.6	328.1	6.8	75.6	5.4	32.
10.5	35.1	3090.6	700.0	5.2	2.3	229.7	9.0	6.9	5.8	309.1	327.6	6.5	81.4	6.0	33.
11.8	37.7	3387.8	675.0	3.8	1.6	237.3	8.4	7.1	4.5	310.8	329.2	6.4	85.0	6.7	35.
13.2	40.4	3694.4	650.0	2.4	-2.2	246.0	8.4	7.6	3.4	312.4	327.2	5.0	71.6	7.3	38.
14.5	43.3	4010.7	625.0	0.5	-3.7	255.1	10.9	10.5	2.8	313.6	327.4	4.7	73.4	7.9	41.
15.7	46.3	4337.5	600.0	-1.2	-8.0	258.4	12.9	12.6	2.6	315.2	325.8	3.5	59.6	8.6	44.
16.8	49.3	4675.6	575.0	-3.6	-13.6	260.7	15.9	15.7	2.6	316.0	323.3	2.3	45.7	9.4	47.
17.9	52.3	5025.9	550.0	-5.7	-17.3	263.8	16.1	16.0	1.7	317.6	323.5	1.9	40.6	10.2	50.
19.9	55.4	5389.3	525.0	-8.2	-19.8	268.6	14.2	14.2	0.3	318.7	323.6	1.5	39.0	11.1	54.
20.2	58.6	5765.6	500.0	-11.5	-15.4	256.0	13.5	13.1	3.3	319.3	326.6	2.3	72.4	12.0	56.
21.6	62.1	6156.9	475.0	-14.4	-22.4	246.9	15.6	14.4	6.1	320.3	324.7	1.3	50.3	13.1	58.
23.1	65.5	6565.9	450.0	-16.4	-23.3	239.2	17.6	15.2	9.0	322.8	327.1	1.3	55.0	14.2	58.
25.1	69.1	6994.1	425.0	-18.7	-24.2	243.1	15.7	14.0	7.1	325.2	329.4	1.3	61.7	16.7	58.
27.0	72.7	7443.9	400.0	-21.5	-30.7	251.7	18.8	17.8	5.9	327.0	329.6	0.7	43.2	18.6	59.
28.5	76.7	7916.1	375.0	-25.3	-66.1	270.7	20.0	20.0	-0.2	328.0	328.0	0.0	1.0	20.1	61.
30.1	80.7	8412.1	350.0	-29.9	-66.2	269.8	26.1	26.1	0.1	328.3	328.3	0.0	1.5	22.1	64.
31.6	85.0	8935.3	325.0	-34.1	-62.3	270.7	26.5	26.5	-0.3	329.5	329.6	0.0	3.9	24.4	66.
33.3	89.3	9490.7	300.0	-38.8	99.9	267.4	26.7	26.6	1.2	330.6	999.9	99.9	999.9	26.9	69.
35.2	94.2	10081.3	275.0	-44.0	99.9	263.1	25.8	25.6	3.1	331.6	999.9	99.9	999.9	29.8	70.
37.1	99.0	10714.6	250.0	-48.5	99.9	271.1	25.8	25.8	-0.5	333.9	999.9	99.9	999.9	32.7	72.
39.2	104.3	11401.1	225.0	-53.2	99.9	272.1	25.5	25.5	-0.9	337.0	999.9	99.9	999.9	35.6	73.
41.3	110.0	12150.0	200.0	-58.5	99.9	272.3	25.0	25.0	-1.0	340.2	999.9	99.9	999.9	38.9	75.
44.3	115.9	12979.4	175.0	-62.6	99.9	271.9	38.4	38.4	-1.3	346.7	999.9	99.9	999.9	44.1	77.
48.0	122.3	13928.6	150.0	-63.7	99.9	264.0	39.1	38.9	3.7	360.4	999.9	99.9	999.9	52.4	79.
52.4	129.3	15046.6	125.0	-64.7	99.9	272.1	29.6	29.6	-1.1	377.8	999.9	99.9	999.9	61.4	80.
57.6	136.3	16415.9	100.0	-62.3	99.9	271.4	32.2	32.2	-0.8	407.3	999.9	99.9	999.9	70.1	81.
63.9	142.8	18129.2	75.0	-62.9	99.9	309.8	11.3	8.7	-7.2	441.2	999.9	99.9	999.9	75.2	84.
72.3	149.5	20704.5	50.0	-61.2	99.9	16.7	5.4	-1.6	-5.2	499.4	999.9	99.9	999.9	76.3	86.
85.1	156.3	25139.1	25.0	-49.2	99.9	278.8	3.6	3.6	-0.6	644.0	999.9	99.9	999.9	74.4	86.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 349
MONETTE, MO

6 MAY 1975
2109 GMT

157 9. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	8.1	438.0	956.0	26.1	19.7	200.0	5.2	1.8	4.9	305.2	346.6	15.4	68.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.3	8.6	493.7	950.0	25.1	18.9	203.8	7.2	2.9	6.6	304.7	344.2	14.6	68.2	0.1	26.
1.4	10.6	727.5	925.0	22.7	17.4	216.3	7.8	4.6	6.3	304.3	341.3	13.7	72.2	0.6	35.
2.5	12.6	566.0	900.0	20.8	16.0	229.7	7.9	6.0	5.1	304.7	339.6	12.8	73.8	1.1	39.
3.7	14.8	1209.3	875.0	18.4	14.6	232.7	9.2	7.3	5.6	304.6	337.5	12.1	78.6	1.7	44.
4.7	16.8	1457.8	850.0	16.3	13.3	229.2	10.2	7.7	6.6	304.7	335.8	11.4	82.4	2.3	46.
5.7	19.1	1711.6	825.0	14.9	10.8	227.1	9.9	7.2	6.7	305.7	333.1	10.0	76.8	2.9	46.
6.9	21.2	1971.7	800.0	12.4	10.3	221.0	10.6	7.0	8.0	305.7	333.1	9.9	86.8	3.6	46.
7.9	23.5	2238.0	775.0	10.6	9.3	220.1	9.6	6.2	7.4	306.5	332.9	9.6	91.7	4.3	45.
9.0	25.8	2510.9	750.0	8.6	7.0	215.8	8.2	4.8	6.7	307.1	330.7	8.4	89.6	4.8	44.
9.9	28.1	2790.8	725.0	7.3	-5.2	206.8	7.6	3.4	6.8	308.0	318.6	3.6	40.6	5.2	43.
10.9	30.6	3080.1	700.0	7.2	-9.0	206.2	7.7	3.4	6.9	310.8	319.2	2.8	30.6	5.7	41.
12.0	33.1	3377.8	675.0	5.0	-10.2	218.2	7.5	4.6	5.9	311.5	319.5	2.6	32.2	6.2	41.
13.2	35.5	3684.2	650.0	2.1	-12.0	224.7	7.2	5.0	5.1	311.6	318.8	2.3	34.3	6.7	41.
14.6	38.1	3999.3	625.0	-0.0	-13.3	228.3	11.0	8.2	7.3	312.7	319.5	2.2	35.9	7.4	41.
15.9	40.7	4324.8	600.0	-2.7	-14.0	241.9	13.9	12.2	6.5	313.3	320.0	2.2	41.4	8.3	43.
17.2	43.4	4660.2	575.0	-6.1	-15.5	246.9	16.5	15.2	6.5	313.0	319.3	2.0	47.5	9.5	46.
18.4	46.2	5006.4	550.0	-8.8	-17.2	248.0	17.0	16.1	6.5	313.8	319.5	1.8	51.0	10.6	48.
19.6	49.0	5365.7	525.0	-10.7	-18.4	241.3	15.8	13.8	7.6	315.7	319.3	1.1	34.2	11.8	50.
21.0	51.8	5738.7	500.0	-14.2	-25.8	230.0	17.0	13.0	10.9	315.8	318.9	0.9	36.4	13.1	51.
22.3	54.9	6125.9	475.0	-16.9	-30.1	230.7	20.2	15.6	12.8	317.1	319.3	0.7	20.4	14.6	50.
23.7	57.9	6532.0	450.0	-17.6	-32.2	226.7	22.8	16.6	15.6	321.2	323.1	0.6	26.4	16.4	50.
25.3	61.3	6957.4	425.0	-20.6	-25.4	227.0	20.7	15.2	14.1	322.7	326.5	1.1	65.3	18.6	50.
26.9	64.7	7403.1	400.0	-24.0	-26.8	231.0	19.2	15.0	11.9	323.8	327.4	1.1	77.4	20.3	50.
28.5	68.0	7870.6	375.0	-28.0	-29.6	235.1	19.0	15.6	10.9	324.5	327.5	0.9	86.5	22.2	50.
30.1	71.6	8362.4	350.0	-31.7	-32.8	234.0	14.7	11.9	8.7	326.0	328.4	0.7	89.6	23.9	50.
31.8	75.5	8882.2	325.0	-35.7	-40.4	237.8	12.1	10.2	6.4	327.5	328.7	0.3	61.1	25.2	51.
33.6	79.7	9434.3	300.0	-39.6	-48.9	250.6	16.8	15.8	5.6	329.4	330.0	0.1	36.3	26.6	51.
35.6	83.8	10024.1	275.0	-43.9	99.9	261.6	24.4	24.1	3.6	331.7	999.9	99.9	999.9	28.9	54.
37.5	88.2	10656.6	250.0	-49.2	99.9	259.2	27.9	27.4	5.2	333.0	999.9	99.9	999.9	31.7	56.
39.6	93.3	11339.9	225.0	-54.5	99.9	249.7	32.3	30.3	11.2	335.0	999.9	99.9	999.9	35.4	58.
42.1	98.4	12085.0	200.0	-59.4	99.9	250.5	29.9	28.2	10.0	338.8	999.9	99.9	999.9	39.9	59.
44.9	104.0	12913.6	175.0	-62.9	99.9	254.5	30.5	29.4	8.1	346.1	999.9	99.9	999.9	45.2	61.
47.9	110.6	13862.5	150.0	-62.6	99.9	256.7	30.1	29.3	6.9	362.3	999.9	99.9	999.9	50.7	62.
51.8	117.7	14588.9	125.0	-61.8	99.9	268.8	16.0	16.0	0.3	383.1	999.9	99.9	999.9	56.2	64.
56.1	126.3	16373.2	100.0	-57.5	99.9	291.3	13.4	12.5	-4.9	416.7	999.9	99.9	999.9	61.1	66.
61.2	135.7	18158.5	75.0	-61.8	99.9	298.9	5.4	4.7	-2.6	443.4	999.9	99.9	999.9	63.5	68.
69.1	146.0	20667.9	50.0	-58.5	99.9	41.9	2.3	-1.5	-1.7	505.7	999.9	99.9	999.9	64.0	69.
82.1	157.5	25090.5	25.0	-49.8	99.9	342.7	2.5	0.7	-2.4	641.7	999.9	99.9	999.9	62.2	70.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 353
OKLAHOMA CITY, OKLA

6 MAY 1975
2015 GMT

150 34. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	RX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.1	392.0	960.0	26.4	6.9	250.0	5.2	4.9	1.8	304.0	322.3	6.5	29.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
0.3	10.0	484.2	950.0	25.9	8.9	261.5	10.2	10.1	1.5	304.5	325.6	7.6	34.1	0.2	75.
0.9	12.0	717.5	925.0	23.1	6.4	258.5	8.7	8.5	1.7	303.9	322.2	6.6	34.0	0.4	79.
1.5	14.4	955.2	900.0	20.7	4.3	256.7	6.7	6.5	1.5	303.6	320.0	5.8	34.0	0.7	77.
2.2	16.5	1197.4	875.0	18.2	2.3	259.7	6.5	6.4	1.2	303.4	318.0	5.2	34.6	0.9	78.
3.1	18.8	1444.6	850.0	16.2	-0.1	251.3	9.7	9.2	3.1	303.8	316.5	4.5	32.8	1.4	77.
4.0	21.1	1697.8	825.0	15.4	-4.1	240.0	13.4	11.6	6.7	305.3	315.3	3.4	25.9	2.0	74.
4.9	23.6	1957.3	800.0	13.0	-6.1	230.4	13.0	10.0	8.3	305.4	314.4	3.0	25.9	2.7	69.
5.9	25.9	2222.9	775.0	11.1	-7.1	227.7	13.7	10.1	9.2	306.1	314.7	2.9	27.2	3.4	64.
6.8	28.4	2494.9	750.0	8.3	-9.4	233.8	16.7	13.5	9.9	305.9	313.4	2.5	27.4	4.2	61.
7.8	31.1	2773.5	725.0	5.7	-11.0	237.1	17.9	15.0	9.7	306.0	312.9	2.3	28.9	5.4	61.
9.0	33.9	3059.6	700.0	4.2	-11.9	224.6	17.3	12.1	12.3	307.4	314.0	2.2	29.8	6.6	59.
10.1	36.2	3355.0	675.0	3.1	-11.9	204.2	16.2	6.6	14.8	309.4	316.3	2.3	32.1	7.6	56.
11.4	39.0	3659.9	650.0	1.6	-10.4	196.8	19.1	5.5	18.3	311.1	319.2	2.7	40.5	8.6	50.
12.6	41.7	3975.4	625.0	-0.1	-6.7	204.9	23.6	9.9	21.3	312.8	324.0	3.7	61.3	10.0	46.
13.7	44.6	4301.3	600.0	-2.1	-15.4	209.8	27.0	13.4	23.4	313.9	319.9	1.9	35.1	11.7	43.
14.9	47.8	4637.4	575.0	-5.3	-20.7	212.2	25.2	13.4	21.3	313.9	318.1	1.3	28.7	13.5	42.
16.2	50.7	4985.6	550.0	-6.8	-26.1	214.6	26.1	14.8	21.5	316.1	318.9	0.8	19.7	15.5	41.
17.5	53.9	5346.5	525.0	-9.9	-28.6	214.3	27.5	15.5	22.7	316.5	318.8	0.7	19.9	17.6	40.
18.9	56.9	5720.8	500.0	-12.5	-30.7	213.7	27.9	15.4	23.2	317.8	319.8	0.6	20.0	19.9	39.
20.4	60.3	6110.7	475.0	-14.9	-32.7	217.8	30.8	18.9	24.4	319.5	321.2	0.5	20.2	22.5	39.
21.9	63.9	6517.0	450.0	-18.3	-35.5	223.0	26.7	18.2	19.5	320.2	321.7	0.4	20.4	25.2	39.
23.6	67.3	6941.3	425.0	-21.6	-38.2	227.3	22.1	16.2	15.0	321.3	322.4	0.3	20.6	27.5	39.
25.3	71.0	7384.3	400.0	-25.8	-41.6	231.1	22.4	17.5	14.1	321.5	322.3	0.2	20.8	29.8	40.
26.8	74.9	7848.4	375.0	-29.7	-44.9	234.7	27.1	22.1	15.6	322.2	322.9	0.2	21.1	32.1	41.
28.7	79.1	8336.9	350.0	-33.4	-48.0	239.7	20.4	17.6	10.3	323.7	324.2	0.1	21.3	34.5	42.
30.6	83.2	8854.1	325.0	-36.5	-50.6	246.4	20.0	18.4	8.0	326.3	326.7	0.1	21.5	36.4	44.
32.6	87.6	9405.0	300.0	-40.1	-50.9	240.5	33.8	29.4	16.7	328.8	999.9	99.9	999.9	39.7	45.
34.8	92.4	9992.9	275.0	-44.7	-50.9	243.1	35.7	31.8	16.2	330.5	999.9	99.9	999.9	43.7	47.
37.0	97.3	10624.7	250.0	-48.7	-50.9	240.9	41.1	35.9	20.0	333.7	999.9	99.9	999.9	49.2	48.
39.6	102.5	11310.6	225.0	-53.1	-50.9	247.9	36.0	33.3	13.5	337.2	999.9	99.9	999.9	55.1	50.
42.3	108.5	12063.2	200.0	-57.3	-50.9	248.9	37.8	35.2	13.6	342.0	999.9	99.9	999.9	61.0	52.
45.3	114.7	12906.2	175.0	-58.4	-50.9	242.1	38.0*	33.6	17.8	353.5	999.9	99.9	999.9	68.1	53.
49.0	121.3	13876.9	150.0	-57.3	-50.9	241.0	25.2*	22.0	12.2	371.3	999.9	99.9	999.9	74.4	54.
53.4	128.7	15020.0	125.0	-61.6	-50.9	252.7	16.1*	15.3	4.8	383.5	999.9	99.9	999.9	79.8	56.
58.4	136.3	16409.3	100.0	-62.5	-50.9	237.3	22.2*	18.6	12.0	407.1	999.9	99.9	999.9	87.6	56.
64.9	144.3	18198.3	75.0	-64.4	-50.9	268.0	16.9	16.9	0.6	438.0	999.9	99.9	999.9	93.4	58.
73.5	152.5	20717.2	50.0	-59.7	-50.9	53.2	11.1	-8.9	-6.7	502.8	999.9	99.9	999.9	92.8	59.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	599.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 354
TINKER AFB, OKLA

6 MAY 1975
2101 GMT

153 14. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.1	393.0	959.8	27.3	10.9	240.0	5.1	4.4	2.6	305.2	329.7	8.6	36.0	7.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
0.4	10.3	483.5	950.0	25.9	6.4	63.2	6.5	-5.8	-2.9	304.4	322.3	6.4	28.8	0.2	248.
1.3	12.7	717.0	925.0	23.4	4.2	62.0	6.3	-5.5	-2.9	304.0	319.8	5.6	28.8	0.5	245.
2.1	14.1	954.8	900.0	21.0	3.4	63.0	6.3	-5.6	-2.9	303.9	319.3	5.5	31.4	0.9	244.
3.0	16.3	1177.1	875.0	18.1	1.7	63.2	5.6	-5.0	-2.5	303.2	317.4	5.0	33.4	1.1	243.
3.9	18.6	1444.2	850.0	15.8	1.5	69.8	7.7	-7.2	-2.7	303.3	317.6	5.0	37.9	1.5	244.
5.0	20.8	1697.0	825.0	14.9	-4.7	57.7	12.2	-10.3	-6.5	304.8	314.4	3.3	25.5	2.1	244.
6.2	23.1	1956.4	800.0	13.4	-6.7	55.2	14.5	-11.9	-8.3	305.8	314.3	2.9	24.1	3.1	241.
7.3	25.5	2222.3	775.0	11.0	-8.7	57.5	15.7	-13.2	-8.6	306.0	313.7	2.6	24.1	4.1	240.
8.4	27.8	2494.3	750.0	8.6	-10.7	60.6	18.1	-15.8	-8.9	306.2	313.0	2.3	24.2	5.2	240.
9.5	30.4	2773.8	725.0	6.9	-11.4	57.2	18.3	-15.4	-9.9	307.3	314.0	2.2	25.7	6.4	240.
10.5	33.0	3060.8	700.0	4.7	-11.5	43.5	16.9	-11.7	-12.3	308.0	314.9	2.3	29.5	7.5	239.
11.7	35.5	3357.2	675.0	3.8	-11.3	23.9	17.2	-6.9	-15.7	310.2	317.5	2.4	32.2	8.6	236.
13.1	38.2	3663.0	650.0	2.2	-7.1	24.8	23.3	-9.7	-21.1	311.9	322.3	3.5	50.2	9.9	23.
14.4	40.8	3978.7	625.0	0.2	-13.6	31.8	28.0	-14.8	-23.8	312.9	319.6	2.2	34.8	11.9	227.
15.8	43.6	4303.7	600.0	-3.3	-16.6	29.8	27.2	-13.5	-23.6	312.6	318.0	1.7	34.6	14.3	224.
17.2	46.6	4638.8	575.0	-5.9	-24.0	31.6	27.1	-14.2	-23.1	313.2	316.3	1.0	22.3	16.5	222.
18.5	49.6	4985.6	550.0	-7.9	-27.2	34.3	27.3	-15.4	-22.6	314.7	317.2	0.7	19.5	18.5	221.
19.9	52.5	5346.2	525.0	-9.8	-29.7	35.9	28.7	-16.8	-23.3	316.7	318.8	0.6	17.8	20.8	220.
21.2	55.6	5721.0	500.0	-12.2	-31.6	37.9	31.6	-19.4	-25.0	318.2	320.1	0.5	17.9	23.4	220.
23.1	58.9	6110.5	475.0	-15.5	-34.3	40.3	23.5	-15.2	-17.9	318.7	320.3	0.4	18.2	26.1	220.
24.8	62.3	6516.5	450.0	-18.3	-36.5	41.3	33.3	-22.0	-25.0	320.2	321.5	0.4	18.4	29.7	220.
26.5	65.7	6939.8	425.0	-22.4	-39.8	49.8	22.2	-16.9	-14.3	320.3	321.3	0.3	18.6	31.8	221.
28.3	69.3	7381.7	400.0	-25.8	-42.6	52.4	25.7	-20.3	-15.6	321.4	322.2	0.2	18.9	34.3	221.
30.0	73.0	7845.6	375.0	-29.5	-45.6	54.4	20.9	-17.0	-12.2	322.5	323.2	0.2	19.1	37.0	222.
31.9	77.0	8334.8	350.0	-33.0	-48.5	63.6	17.1	-15.3	-7.6	324.1	324.6	0.1	19.4	38.8	223.
33.8	81.1	8852.3	325.0	-36.5	-51.4	57.0	30.2	-25.4	-16.5	326.3	326.7	0.1	19.6	41.1	224.
35.7	85.3	9403.0	300.0	-40.5	-54.9	64.9	31.1	-28.2	-13.2	328.3	999.9	99.9	999.9	44.8	225.
37.8	89.8	9999.9	275.0	-45.4	-59.9	62.7	41.8	-37.2	-19.2	329.4	999.9	99.9	999.9	49.1	227.
39.8	94.7	10619.7	250.0	-49.6	-64.9	999.9	99.9	99.9	99.9	332.4	999.9	99.9	999.9	999.9	999.
42.2	99.8	11322.6	225.0	-54.0	-69.9	999.9	99.9	99.9	99.9	335.8	999.9	99.9	999.9	999.9	999.
44.8	105.3	12151.9	200.0	-57.7	-74.9	65.5	41.1*	-37.4	-17.1	341.3	999.9	99.9	999.9	65.2	231.
47.4	111.0	12892.4	175.0	-59.4	-79.9	63.8	37.9*	-34.0	-16.7	351.9	999.9	99.9	999.9	71.4	233.
50.2	117.3	13856.2	150.0	-58.9	-84.9	64.0	29.5*	-26.5	-12.9	368.7	999.9	99.9	999.9	77.4	233.
53.5	124.7	14994.3	125.0	-61.5	-89.9	74.1	18.7*	-18.0	-5.1	383.7	999.9	99.9	999.9	82.1	235.
57.2	132.3	16380.5	100.0	-63.4	-94.9	61.5	16.9*	-14.6	-2.1	405.3	999.9	99.9	999.9	86.8	235.
61.9	140.5	18153.8	75.0	-65.6	-99.9	95.1	17.1	-17.0	1.5	435.5	999.9	99.9	999.9	91.3	237.
65.4	148.7	20653.4	50.0	-60.5	-99.9	223.6	4.8	3.3	3.5	501.1	999.9	99.9	999.9	89.7	238.
79.6	157.3	25085.8	25.0	-50.8	-99.9	142.1	3.9	-2.4	3.1	639.1	999.9	99.9	999.9	87.6	237.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 363
AMARILLO, TEX.

6 MAY 1975
2025 GMT

112 100. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.1	13.6	1095.7	842.0	19.3	-13.0	240.3	11.3	9.8	5.7	303.4	308.2	1.6	10.0	0.7	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.2	14.2	1163.1	875.0	17.2	-4.9	242.6	14.7	13.0	6.8	302.1	310.9	3.0	21.6	0.5	75.
0.7	15.1	1409.0	850.0	14.8	-6.1	243.5	15.0	13.4	6.7	302.0	310.4	2.9	23.0	0.7	71.
1.5	16.3	1659.7	825.0	11.7	-7.8	246.3	14.7	13.5	5.9	301.3	308.8	2.6	24.7	1.4	58.
2.3	20.4	1915.5	800.0	8.9	-9.9	244.8	13.8	12.5	5.9	301.0	307.6	2.2	25.1	2.0	67.
3.3	22.5	2177.2	775.0	6.8	-11.7	246.4	11.6	10.6	4.6	301.4	307.4	2.0	25.2	2.8	67.
4.2	24.8	2445.0	750.0	3.9	-14.1	245.5	13.5	12.3	5.6	301.1	306.2	1.7	25.3	3.5	67.
5.2	26.9	2719.1	725.0	1.6	-16.0	249.5	13.1	12.3	4.6	301.4	306.0	1.5	25.4	4.3	67.
5.8	29.3	3001.7	700.0	1.2	-19.8	250.8	13.5	12.8	4.4	304.0	307.5	1.1	19.1	4.8	67.
6.6	31.8	3293.1	675.0	-0.3	-21.0	248.7	18.5	17.2	6.7	305.4	308.7	1.1	19.2	5.5	67.
7.5	34.3	3594.6	650.0	-0.9	-21.5	244.8	21.1	19.1	9.0	308.1	311.4	1.1	19.2	6.6	68.
8.4	36.6	3917.3	625.0	-1.7	-22.1	234.8	21.3	17.4	12.3	310.6	314.0	1.0	19.2	7.8	67.
9.4	39.2	4230.6	600.0	-4.1	-24.0	229.5	23.2	17.6	15.0	311.5	314.4	0.9	19.4	9.0	64.
10.3	41.3	4564.9	575.0	-6.4	-25.9	227.6	23.1	17.0	15.6	312.5	315.2	0.8	19.5	10.3	62.
11.2	44.6	4911.0	550.0	-8.9	-27.9	229.1	23.0	17.3	15.0	313.6	315.9	0.7	19.7	11.4	61.
12.0	47.4	5269.4	525.0	-11.6	-29.3	233.9	23.4	18.9	13.8	314.6	316.7	0.6	21.3	12.6	60.
13.0	50.3	5641.8	500.0	-13.7	-31.2	235.1	26.1	21.4	14.9	316.4	318.3	0.6	21.1	14.1	59.
14.1	53.3	6029.5	475.0	-16.6	-33.9	232.7	26.9	21.4	16.3	317.4	319.0	0.5	20.6	15.9	59.
15.2	56.1	6433.5	450.0	-19.5	-36.3	228.2	27.3	20.3	18.2	318.7	320.0	0.4	20.8	17.7	58.
16.2	59.5	6855.3	425.0	-22.8	-38.6	230.2	28.6	22.0	18.3	319.8	320.9	0.3	21.9	19.3	57.
17.4	63.0	7296.8	400.0	-26.0	-40.7	228.0	31.7	23.6	21.2	321.1	322.1	0.3	23.4	21.3	56.
18.4	66.3	7761.0	375.0	-29.6	-43.9	230.3	32.8	25.2	21.0	322.4	323.1	0.2	23.3	23.3	56.
19.7	70.0	8249.4	350.0	-33.4	-46.7	233.0	32.0	25.5	19.3	323.6	324.2	0.2	24.6	25.8	55.
21.0	72.7	8765.6	325.0	-37.4	-50.1	233.9	34.5	27.9	20.3	325.1	325.5	0.1	24.7	28.3	55.
22.2	77.7	9312.5	300.0	-42.3	99.9	234.6	37.8	30.8	21.9	325.7	999.9	99.9	999.9	31.1	55.
23.7	81.8	9894.4	275.0	-47.0	99.9	235.1	37.4	30.7	21.4	327.2	999.9	99.9	999.9	34.4	55.
25.3	86.2	10519.5	250.0	-51.3	99.9	237.2	39.8	33.5	21.5	329.6	999.9	99.9	999.9	38.1	55.
27.0	91.2	11199.1	225.0	-54.5	99.9	240.8	39.6	34.6	19.3	335.0	999.9	99.9	999.9	41.8	56.
28.8	96.4	11947.8	200.0	-57.2	99.9	242.3	39.4	34.9	18.3	342.2	999.9	99.9	999.9	46.4	56.
30.9	102.0	12790.5	175.0	-57.7	99.9	241.6	41.4	36.4	19.7	354.7	999.9	99.9	999.9	51.2	57.
33.2	108.3	13772.5	150.0	-54.4	99.9	246.6	38.2	35.1	15.2	376.3	999.9	99.9	999.9	56.6	57.
35.8	115.5	14939.3	125.0	-56.0	99.9	225.1	27.1	19.2	19.1	393.6	999.9	99.9	999.9	61.6	58.
39.1	124.0	16345.1	100.0	-59.8	99.9	999.9	99.9	99.9	99.9	412.3	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 365
ALBUQUERQUE, N MEX

6 MAY 1975
2015 GMT

142 10. 0

TIME MIN	ENTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	20.8	1619.0	831.0	13.9	-12.3	220.0	10.3	6.6	7.9	302.9	308.3	1.8	15.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.1	21.0	1676.7	825.0	11.4	-12.3	236.4	11.2	9.3	6.2	309.5	306.3	1.8	17.6	0.3	44.
1.0	23.4	1934.1	800.0	7.3	-15.5	239.4	11.3	9.7	5.7	299.1	303.3	1.4	17.9	0.7	51.
1.6	25.6	2194.1	775.0	4.9	-16.8	245.3	11.5	10.5	4.8	299.3	303.3	1.3	18.5	1.1	55.
2.1	28.0	2459.9	750.0	2.1	-17.5	249.7	10.6	10.0	3.7	299.1	302.9	1.3	21.6	1.4	58.
2.7	30.5	2732.4	725.0	-0.2	-18.2	254.2	9.1	8.7	2.5	299.4	303.2	1.3	24.2	1.8	61.
3.2	33.1	3011.8	700.0	-2.9	-19.0	261.7	8.9	8.8	1.3	299.4	303.1	1.2	27.7	2.0	63.
3.9	35.5	3298.3	675.0	-5.8	-19.5	272.6	9.7	9.7	-0.4	299.3	302.9	1.2	33.1	2.3	66.
4.3	38.1	3592.4	650.0	-8.6	-20.1	272.0	10.4	10.4	-0.4	299.3	302.9	1.2	38.7	2.6	70.
5.8	40.7	3894.9	625.0	-11.8	-20.7	263.1	12.5	12.4	1.5	299.1	302.7	1.2	47.5	3.6	74.
7.1	43.4	4205.9	600.0	-14.8	-21.6	261.1	13.3	13.2	2.1	299.1	302.6	1.1	55.8	4.6	76.
8.1	46.3	4526.8	575.0	-16.6	-24.1	264.2	17.6	17.5	1.8	300.6	303.5	0.9	52.0	5.4	77.
8.9	49.3	4860.0	550.0	-17.9	-29.3	260.7	25.6	25.3	4.1	302.9	304.8	0.6	35.9	6.5	78.
9.8	52.0	5207.5	525.0	-18.7	-33.4	259.2	32.6	32.0	6.1	305.9	307.3	0.4	26.1	8.1	78.
11.1	55.0	5579.3	500.0	-19.8	-34.3	256.8	35.6	34.7	8.1	308.9	310.3	0.4	26.1	10.7	78.
12.6	57.9	5951.0	475.0	-20.1	-34.5	249.8	42.1	39.5	14.5	313.1	314.5	0.4	26.1	14.3	77.
14.2	61.1	6349.9	450.0	-22.7	-36.8	248.9	44.4	41.4	16.0	314.7	315.9	0.4	26.2	18.3	75.
15.6	64.6	6767.0	425.0	-25.4	-39.1	246.5	44.2	40.5	17.7	316.4	317.5	0.3	26.4	22.2	74.
17.2	67.9	7205.1	400.0	-27.7	-41.1	244.2	45.7	41.2	19.9	318.9	319.9	0.3	26.4	26.5	72.
19.0	71.3	7666.7	375.0	-30.1	-43.1	241.8	44.6	39.3	21.1	321.7	322.5	0.2	26.5	31.3	71.
20.9	75.2	8155.0	350.0	-33.0	-45.6	240.9	47.1*	41.2	22.9	324.2	324.8	0.2	26.7	36.3	70.
22.6	79.2	8671.9	325.0	-37.2	-49.3	241.9	48.4*	42.7	22.8	325.3	325.8	0.1	26.8	41.4	69.
24.1	83.2	9220.8	300.0	-40.8	99.9	239.4	44.6*	38.4	22.7	327.9	999.9	99.9	999.9	45.4	68.
26.0	87.5	9806.2	275.0	-46.0	99.9	235.6	41.1*	34.0	23.2	328.6	999.9	99.9	999.9	50.4	67.
28.3	92.2	10435.3	250.0	-50.0	99.9	237.1	38.9*	32.7	21.1	331.7	999.9	99.9	999.9	55.6	66.
30.7	97.0	11117.2	225.0	-53.7	99.9	240.5	46.5*	40.4	22.9	336.2	999.9	99.9	999.9	62.4	65.
33.2	102.0	11873.2	200.0	-54.8	99.9	231.0	38.7*	30.1	24.3	345.9	999.9	99.9	999.9	67.7	65.
36.6	108.3	12735.8	175.0	-50.9	99.9	239.9	31.5*	27.2	15.8	365.9	999.9	99.9	999.9	74.0	64.
39.3	114.3	13729.2	150.0	-54.6	99.9	244.7	29.1*	26.3	12.5	376.0	999.9	99.9	999.9	79.4	64.
43.9	121.3	14902.0	125.0	-55.1	99.9	230.6	21.3*	16.4	13.5	395.2	999.9	99.9	999.9	87.2	63.
48.7	129.0	16317.7	100.0	-57.2	99.9	251.6	18.8*	17.8	5.9	417.3	999.9	99.9	999.9	92.5	63.
54.1	137.3	18132.2	75.0	-60.3	99.9	211.6	15.3*	8.0	13.0	446.4	999.9	99.9	999.9	98.7	62.
61.9	146.0	20678.0	50.0	-58.7	99.9	8.2	6.7*	-1.0	-6.6	505.2	999.9	99.9	999.9	100.3	62.
73.9	155.3	25116.9	25.0	-51.7	99.9	269.1	6.3	6.3	0.1	636.5	999.9	99.9	999.9	100.0	62.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 433
SALEM, ILL

6 MAY 1975
2107 GWT

156 19. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	CIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.8	175.0	988.4	20.5	18.4	230.0	5.2	4.0	3.3	296.5	332.1	13.7	88.0	7.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	6.8	293.4	975.0	19.9	17.9	188.8	10.7	1.6	10.6	297.0	332.1	13.4	88.1	0.3	353.
1.1	9.2	517.4	950.0	18.2	17.0	195.0	12.7	3.3	12.3	297.4	331.5	13.0	93.0	0.6	3.
1.7	11.4	746.2	925.0	17.0	15.6	197.9	13.1	4.0	12.4	298.3	330.4	12.2	91.5	1.2	10.
2.5	13.6	980.4	900.0	16.5	12.9	184.1	11.3	0.8	11.3	299.9	328.1	10.5	79.6	1.8	11.
3.2	16.1	1220.2	875.0	15.0	12.5	175.8	11.7	-0.8	11.6	300.8	329.1	10.5	85.1	2.2	9.
4.0	18.5	1466.1	850.0	14.1	10.5	178.4	8.2	-0.2	8.2	302.2	327.9	9.4	78.7	2.7	6.
4.6	20.9	1718.0	825.0	13.1	9.1	193.0	5.3	1.2	5.2	303.6	328.0	8.9	76.7	3.0	6.
5.4	23.5	1976.3	800.0	11.0	5.8	177.5	2.3	-0.1	2.3	303.8	324.1	7.3	70.4	3.1	7.
6.3	25.9	2240.6	775.0	8.6	5.5	110.9	1.0	-0.9	0.3	304.0	324.4	7.3	80.9	3.2	6.
7.0	28.6	2511.3	750.0	6.2	4.6	55.1	1.5	-1.3	-0.9	304.2	324.1	7.1	89.5	3.2	5.
7.9	31.2	2788.6	725.0	4.0	1.5	34.2	3.0	-1.7	-2.5	304.7	321.4	5.9	83.5	3.1	4.
8.7	34.7	3073.1	700.0	1.8	-0.1	27.9	3.1	-1.4	-2.7	305.1	320.7	5.5	87.6	2.9	2.
9.5	36.6	3365.9	675.0	-0.3	-1.3	344.1	0.4	0.1	-0.4	305.9	320.7	5.2	93.0	2.8	1.
10.5	39.6	3667.7	650.0	-1.5	-2.0	218.0	4.1	2.5	3.2	307.9	322.6	5.1	96.9	2.9	3.
11.4	42.3	3978.9	625.0	-3.8	-4.4	234.2	5.7	4.6	3.3	308.7	321.5	4.4	95.3	3.2	6.
12.5	45.3	4301.6	600.0	-4.3	-4.9	274.7	8.4	8.4	-0.7	311.6	324.7	4.4	95.6	3.4	13.
13.5	48.4	4636.7	575.0	-5.9	-6.5	297.3	10.5	9.3	-4.8	313.6	325.9	4.1	95.4	3.4	24.
14.5	51.3	4984.0	550.0	-8.0	-8.7	303.9	9.9	8.2	-5.5	315.1	326.0	3.6	94.5	3.3	35.
15.7	54.5	5344.7	525.0	-10.0	-11.4	286.2	7.9	7.6	-2.2	316.8	326.2	3.1	89.8	3.4	45.
16.8	57.6	5719.0	500.0	-13.2	-16.4	260.5	7.3	7.2	1.2	317.1	323.8	2.1	76.7	3.8	51.
18.0	61.1	6107.4	475.0	-16.2	-18.8	278.7	7.9	7.8	-1.2	318.1	323.9	1.8	80.0	4.2	54.
19.3	64.6	6514.1	450.0	-17.4	-20.0	281.6	12.3	12.0	-2.5	321.5	327.2	1.7	79.8	4.7	61.
20.6	68.0	6939.6	425.0	-20.4	-23.6	280.4	16.8	16.5	-3.0	322.9	327.4	1.3	75.0	5.7	68.
21.9	71.6	7386.3	400.0	-23.6	-27.4	282.5	18.7	18.2	-4.0	324.3	327.8	1.0	71.1	7.0	75.
23.5	75.3	7855.5	375.0	-26.5	-30.3	266.0	17.8	17.7	1.2	326.6	329.4	0.8	69.6	8.6	80.
24.8	79.5	8350.6	350.0	-30.3	-34.8	259.2	20.3	19.9	3.8	327.9	329.9	0.6	64.5	10.1	80.
26.9	83.5	8873.3	325.0	-34.5	-40.1	264.7	22.4	22.3	2.1	329.1	330.4	0.4	56.4	12.9	80.
28.6	87.9	9427.0	300.0	-39.3	99.9	267.0	22.6	22.6	1.2	330.0	999.9	99.9	99.9	15.2	81.
30.3	92.5	10016.4	275.0	-44.6	99.9	263.5	23.0	22.8	2.6	330.7	999.9	99.9	99.9	17.3	82.
32.2	97.2	10646.7	250.0	-50.4	99.9	264.5	24.0	23.9	2.3	331.2	999.9	99.9	99.9	20.0	82.
34.1	102.2	11325.3	225.0	-56.2	99.9	263.5	22.6	22.5	2.5	332.3	999.9	99.9	99.9	22.6	82.
36.3	107.8	12063.0	200.0	-62.1	99.9	266.9	20.9	26.9	1.5	334.4	999.9	99.9	99.9	25.8	82.
38.6	113.8	12878.9	175.0	-66.6	99.9	270.8	34.2	34.2	-0.5	340.0	999.9	99.9	99.9	30.1	84.
41.9	120.0	13611.0	150.0	-62.2	99.9	289.1	25.2	23.8	-8.2	362.9	999.9	99.9	99.9	35.8	86.
45.8	127.0	14935.2	125.0	-61.9	99.9	285.0	18.6	18.0	-4.8	383.0	999.9	99.9	99.9	39.8	89.
50.5	134.7	16327.2	100.0	-58.9	99.9	289.2	15.2	14.3	-5.0	414.1	999.9	99.9	99.9	44.3	91.
56.7	142.0	18129.5	75.0	-58.8	99.9	337.6	7.9	3.0	-7.3	449.7	999.9	99.9	99.9	48.5	93.
64.5	149.7	20661.5	50.0	-60.8	99.9	283.9	4.9	4.7	-1.2	500.4	999.9	99.9	99.9	50.7	94.
77.0	158.0	25072.7	25.0	-51.0	99.9	164.7	2.7	-0.7	2.6	638.1	999.9	99.9	99.9	49.8	95.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 451
DODGE CITY, KAN

6 MAY 1975
2015 GMT

154 18. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.4	13.7	791.3	912.9	21.7	-5.2	220.0	9.2	5.9	7.0	303.6	311.4	2.8	16.0	0.3	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.4	14.9	913.0	900.0	18.2	-3.2	218.8	15.5	9.7	12.0	300.7	310.4	3.4	23.1	0.4	36.
1.1	17.1	1153.0	875.0	16.0	-3.9	220.7	13.6	8.9	10.3	300.9	310.3	3.3	25.1	1.0	38.
1.7	16.5	1399.0	850.0	13.5	-6.0	218.4	13.2	8.2	10.3	300.7	309.1	2.9	25.2	1.4	39.
2.5	21.7	1647.9	825.0	10.0	-8.2	214.6	12.5	7.1	10.3	300.5	307.8	2.5	25.3	2.0	38.
3.5	24.2	1903.2	800.0	8.6	-9.1	214.3	13.2	7.5	10.9	300.6	307.6	2.4	27.5	2.8	37.
4.5	26.6	2164.1	775.0	5.9	-10.9	214.7	13.4	7.6	11.0	300.4	306.7	2.2	28.8	3.6	37.
5.3	29.2	2431.2	750.0	3.4	-12.5	214.4	12.8	7.2	10.6	300.5	306.3	1.9	30.0	4.2	36.
6.3	31.9	2704.8	725.0	0.9	-14.8	229.7	13.5	10.3	8.7	300.6	305.7	1.7	29.7	4.9	37.
7.6	34.6	2986.8	700.0	0.9	-17.5	237.0	19.1	16.0	10.4	303.6	307.8	1.4	23.7	5.6	39.
7.6	37.1	3278.0	675.0	-0.9	-20.2	240.4	22.1	19.2	10.9	304.7	308.3	1.1	21.4	6.5	41.
8.4	40.0	3577.5	650.0	-3.8	-22.5	240.2	23.5	20.4	11.7	304.8	307.8	1.0	21.6	7.4	44.
9.3	42.7	3887.4	625.0	-2.8	-21.8	229.8	25.8	19.7	10.6	309.3	312.7	1.1	21.6	8.7	47.
10.5	45.6	4210.8	600.0	-3.5	-22.3	219.2	29.1	18.4	22.6	312.2	315.6	1.1	21.6	10.8	45.
11.6	48.6	4545.7	575.0	-5.9	-24.2	221.7	28.4	18.9	21.2	313.2	316.3	0.9	21.7	12.8	44.
12.8	51.6	4892.1	550.0	-8.7	-26.5	225.2	28.3	20.1	19.9	313.9	316.5	0.8	21.9	14.7	44.
13.8	54.8	5250.9	525.0	-11.1	-28.5	223.1	30.5	20.9	22.3	315.2	317.5	0.7	22.1	16.4	45.
15.4	57.9	5624.0	500.0	-13.4	-30.5	215.6	33.8	19.7	27.5	316.7	318.7	0.6	22.2	18.8	44.
16.1	61.3	6012.0	475.0	-16.3	-32.8	215.7	35.0	20.4	28.4	317.8	319.5	0.5	22.4	21.0	43.
17.2	64.9	6416.7	450.0	-18.8	-34.9	215.7	34.1	19.9	27.7	319.6	321.1	0.4	22.5	23.2	42.
18.3	68.3	6839.4	425.0	-22.4	-37.9	215.0	31.4	18.0	25.7	320.2	321.4	0.3	22.7	25.4	42.
19.5	71.7	7282.8	400.0	-24.7	-38.7	218.6	37.0	23.1	28.9	322.9	324.1	0.3	25.6	27.8	41.
20.9	75.7	7749.2	375.0	-28.3	-41.5	214.9	32.5	18.6	26.7	324.0	325.0	0.3	26.8	31.2	41.
22.5	79.9	8239.8	350.0	-32.5	-44.6	221.0	34.3	22.5	25.9	324.8	325.6	0.2	28.7	34.2	40.
24.1	83.8	8757.9	325.0	-36.5	-48.1	224.3	39.1	27.3	28.0	326.3	326.8	0.1	28.8	37.5	41.
25.7	88.0	9307.3	300.0	-40.8	-50.9	221.1	25.8	16.9	19.4	327.9	999.9	99.9	999.9	40.5	41.
27.2	92.8	9891.9	275.0	-46.4	-54.9	222.4	35.6	24.0	26.3	328.0	999.9	99.9	999.9	43.3	41.
29.0	97.6	10517.8	250.0	-51.5	-59.9	224.5	26.8	18.8	19.1	329.5	999.9	99.9	999.9	47.2	41.
31.0	102.5	11195.7	225.0	-55.3	-59.9	226.1	27.2	19.6	18.8	333.8	999.9	99.9	999.9	50.5	42.
33.2	108.3	11941.2	200.0	-57.8	-59.9	218.9	26.0	16.3	20.2	341.3	999.9	99.9	999.9	54.0	42.
36.2	114.3	12783.6	175.0	-57.4	-59.9	229.4	24.0	18.2	15.6	355.2	999.9	99.9	999.9	58.4	42.
39.0	120.8	13761.9	150.0	-55.3	-59.9	239.1	22.1	19.0	11.4	374.9	999.9	99.9	999.9	63.8	43.
43.4	128.0	14920.1	125.0	-55.9	-59.9	229.5	21.3	16.2	13.8	393.8	999.9	99.9	999.9	67.6	43.
48.0	136.0	16335.3	100.0	-53.8	-59.9	253.8	14.8	14.2	4.1	423.8	999.9	99.9	999.9	74.1	44.
53.9	144.3	18147.9	75.0	-60.0	-59.9	236.8	8.5	7.1	4.6	447.2	999.9	99.9	999.9	78.5	46.
61.5	153.5	20686.7	50.0	-60.1	-59.9	73.7	4.9	-4.7	-1.4	501.9	999.9	99.9	999.9	78.9	46.
72.7	163.0	25100.1	25.0	-51.2	-59.9	21.6	1.6	-0.6	-1.5	637.6	999.9	99.9	999.9	78.1	45.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 456
TOPEKA, KAN

6 MAY 1975
2015 GMT

154 37. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CGMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	7.7	263.0	970.5	30.0	19.1	180.0	9.8	0.0	9.8	307.8	347.4	14.5	52.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.9	9.6	456.8	950.0	24.9	18.2	184.0	13.1	0.9	13.0	304.3	342.1	14.0	66.3	0.7	3.
2.1	11.9	690.6	925.0	22.4	17.1	180.3	11.9	0.1	11.9	304.1	340.4	13.5	72.1	1.6	3.
3.2	14.4	928.6	900.0	19.4	17.5	180.6	12.4	0.1	12.4	303.4	341.4	14.1	88.4	2.4	2.
4.2	16.8	1171.1	875.0	17.1	16.3	185.3	14.1	1.3	14.1	303.3	339.5	13.5	95.2	3.2	2.
5.1	19.3	1412.3	850.0	14.8	14.2	190.6	14.8	2.7	14.5	303.3	330.1	12.1	96.2	4.0	3.
6.2	21.8	1671.0	825.0	12.2	10.8	196.2	15.2	4.2	14.6	302.8	330.0	10.0	91.2	4.9	5.
7.1	24.5	1928.6	800.0	10.9	7.7	191.2	20.1	3.9	19.8	303.8	325.6	7.9	76.8	5.9	7.
8.9	27.0	2193.8	775.0	10.0	5.6	192.3	17.9	3.8	17.5	305.6	326.2	7.4	73.7	7.8	7.
9.9	29.8	2467.4	750.0	10.3	4.5	194.7	18.4	4.7	17.8	308.7	328.8	7.1	67.4	9.0	8.
10.9	32.7	2748.8	725.0	8.4	2.2	193.8	16.9	4.0	16.4	309.5	327.3	6.2	64.9	10.0	9.
12.3	35.5	3038.3	700.0	6.1	-0.2	195.5	17.1	4.6	16.5	309.9	325.6	5.4	64.0	11.3	10.
13.6	38.4	3335.2	675.0	3.7	-2.9	196.5	18.9	5.4	18.1	310.4	323.9	4.6	62.1	12.8	10.
14.5	41.1	3641.0	650.0	1.5	-4.6	198.8	16.4	5.3	15.5	311.3	323.7	4.2	63.0	13.9	11.
15.7	44.3	3955.9	625.0	-1.0	-7.4	200.5	16.3	5.7	15.2	311.7	322.3	3.5	62.0	14.8	11.
16.6	47.4	4280.0	600.0	-4.7	-8.3	202.1	17.1	6.5	15.9	311.1	321.3	3.4	75.7	15.8	12.
17.6	50.4	4613.4	575.0	-7.7	-9.6	202.9	15.6	6.1	14.3	311.3	321.0	3.2	86.5	16.7	13.
18.8	53.6	4958.1	550.0	-9.8	-11.4	199.7	15.8	5.3	14.8	312.8	321.7	2.9	88.2	17.8	13.
21.0	56.7	5316.4	525.0	-11.6	-13.5	204.3	18.7	7.7	17.1	314.7	322.7	2.6	86.3	20.3	14.
22.2	60.1	5685.3	500.0	-13.6	-15.8	208.3	20.1	9.5	17.7	316.7	323.7	2.2	83.6	21.7	15.
24.0	63.7	6078.4	475.0	-15.3	-18.0	215.1	20.8	12.0	17.0	319.2	325.5	2.0	80.0	23.8	16.
25.5	67.2	6485.1	450.0	-17.8	-20.9	225.6	20.3	14.5	14.2	321.0	326.2	1.6	76.2	25.4	18.
27.0	70.8	6910.0	425.0	-21.1	-24.8	222.3	20.0	13.5	14.8	322.0	326.0	1.2	71.9	27.0	20.
28.0	74.7	7355.0	400.0	-24.3	-28.1	220.2	19.4	12.5	14.8	323.5	326.6	0.9	70.2	28.3	21.
29.3	78.7	7822.1	375.0	-28.3	-32.8	227.7	15.8	11.7	10.6	324.1	326.3	0.6	65.1	29.4	22.
31.0	82.7	8313.5	350.0	-31.9	-36.7	225.9	17.7	12.7	12.3	325.7	327.3	0.5	62.3	31.0	23.
33.4	86.8	8832.5	325.0	-36.1	-41.1	235.4	18.4	15.1	10.4	326.9	328.0	0.3	59.4	33.4	25.
35.1	91.4	9384.0	300.0	-39.9	-44.4	247.7	13.1	12.2	5.0	329.2	999.9	99.9	999.9	34.9	27.
36.7	96.0	9972.6	275.0	-44.4	-48.4	249.3	14.2	13.2	5.0	330.9	999.9	99.9	999.9	35.7	28.
39.0	101.0	10602.8	250.0	-50.1	-54.0	249.0	12.9	12.1	4.6	331.6	999.9	99.9	999.9	36.8	30.
40.9	106.5	11282.4	225.0	-56.0	-59.9	247.1	12.9	11.9	5.0	332.7	999.9	99.9	999.9	38.2	31.
44.3	112.3	12025.9	200.0	-58.6	-61.2	245.5	21.7	19.8	9.0	340.0	999.9	99.9	999.9	41.1	34.
47.3	118.5	12859.2	175.0	-61.2	-65.4	236.9	17.2	14.4	9.4	348.9	999.9	99.9	999.9	43.7	36.
51.1	125.0	13811.6	150.0	-58.4	-60.0	233.3	18.8	15.1	11.2	369.5	999.9	99.9	999.9	48.1	37.
54.5	132.3	14953.7	125.0	-60.0	-59.3	241.5	20.5	18.0	9.8	386.3	999.9	99.9	999.9	51.6	39.
59.0	139.8	16354.6	100.0	-59.3	-60.8	255.3	17.1	16.6	4.4	413.1	999.9	99.9	999.9	54.9	43.
65.7	147.5	18153.3	75.0	-60.8	-59.5	266.2	10.4	10.4	0.7	445.6	999.9	99.9	999.9	58.4	46.
74.5	155.7	20691.1	50.0	-59.5	-59.9	332.4	4.4	2.0	-3.9	503.4	999.9	99.9	999.9	58.8	48.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 476
GRAND JUNCTION, COLO

6 MAY 1975
2015 GMT

150 14. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	20.1	1474.0	844.0	8.3	-6.2	270.0	6.7	6.7	0.0	295.8	3.3.9	2.8	35.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	21.7	1661.6	825.0	6.5	-8.0	270.3	7.7	7.7	-0.0	295.8	303.1	2.5	34.6	0.3	91.
1.4	24.2	1912.6	800.0	3.7	-9.0	261.8	7.2	7.1	1.0	295.4	302.4	2.4	39.0	0.6	89.
2.2	26.6	2169.3	775.0	1.3	-10.1	252.7	7.6	7.2	2.3	295.5	302.0	2.3	42.4	1.0	85.
2.8	29.2	2431.8	750.0	-1.6	-11.8	248.2	6.9	6.4	2.6	295.1	301.1	2.1	45.7	1.2	81.
3.7	31.9	2700.7	725.0	-4.0	-12.5	252.0	6.8	6.4	2.1	295.3	301.2	2.0	51.6	1.6	78.
4.7	34.6	2976.4	700.0	-6.6	-13.3	255.6	7.2	7.0	1.8	295.4	301.1	2.0	59.0	2.0	78.
5.7	37.1	3259.2	675.0	-9.1	-13.9	244.7	6.9	6.2	3.0	295.6	301.3	1.9	68.0	2.4	76.
7.1	40.0	3549.8	650.0	-11.9	-16.0	251.0	6.8	6.5	2.1	295.7	300.6	1.7	71.2	3.0	75.
8.3	42.7	3848.9	625.0	-14.2	-14.3	257.6	7.0	6.8	1.5	296.4	302.3	2.0	99.6	3.5	75.
9.5	45.8	4156.5	600.0	-17.6	-20.3	253.7	6.7	6.4	1.9	295.9	299.7	1.3	78.8	4.0	75.
10.6	48.9	4473.9	575.0	-20.0	-23.8	251.7	7.3	6.9	2.3	296.6	299.6	1.0	71.6	4.5	75.
11.7	51.9	4801.7	550.0	-23.0	-32.7	251.0	7.2	6.8	2.4	296.8	298.2	0.4	40.4	5.0	75.
12.9	55.0	5140.8	525.0	-25.5	-36.7	244.7	7.1	6.4	3.0	297.2	298.8	0.3	34.0	5.5	74.
14.1	58.1	5492.8	500.0	-28.5	-38.8	243.6	7.1	6.3	3.1	298.2	299.1	0.3	36.1	5.9	73.
15.3	61.6	5858.6	475.0	-31.0	-40.7	225.9	6.8	4.9	4.8	299.6	300.4	0.2	37.2	6.5	72.
16.5	65.1	6240.1	450.0	-33.4	-41.1	189.5	5.1	0.8	5.0	301.2	302.0	0.2	45.8	6.8	69.
17.9	68.7	6638.6	425.0	-37.1	-47.2	138.7	3.6	-2.4	2.7	301.5	301.9	0.1	33.6	6.9	67.
19.3	72.2	7056.4	400.0	-38.9	-46.8	68.4	7.0	-6.5	-2.6	304.4	304.9	0.1	42.3	6.5	65.
20.7	76.2	7496.6	375.0	-41.8	99.9	46.6	9.8	-7.1	-6.7	306.3	999.9	99.9	999.9	5.7	67.
22.1	80.3	7962.2	350.0	-43.9	99.9	34.6	5.8	-3.3	-4.8	309.5	999.9	99.9	999.9	5.1	69.
23.8	84.5	8462.4	325.0	-41.0	99.9	278.0	2.4	2.4	-0.3	320.2	999.9	99.9	999.9	4.9	73.
25.5	88.8	9005.9	300.0	-41.6	99.9	251.9	8.2	7.8	2.6	326.7	999.9	99.9	999.9	5.6	73.
27.6	93.7	9596.3	275.0	-41.8	99.9	243.0	14.9	13.3	6.8	334.7	999.9	99.9	999.9	6.9	71.
29.7	98.6	10241.8	250.0	-41.7	99.9	240.9	18.1	15.8	8.8	344.1	999.9	99.9	999.9	8.9	70.
32.0	103.8	10555.9	225.0	-42.0	99.9	243.2	18.8	16.8	8.5	354.2	999.9	99.9	999.9	11.6	68.
34.5	109.6	11751.2	200.0	-44.2	99.9	231.1	19.0	14.8	12.0	362.9	999.9	99.9	999.9	14.3	66.
37.8	115.6	12637.3	175.0	-48.7	99.9	228.8	15.9	11.9	10.5	369.5	999.9	99.9	999.9	17.6	63.
41.1	122.5	13641.1	150.0	-51.8	99.9	239.0	15.1	12.9	7.7	380.2	999.9	99.9	999.9	20.8	62.
45.2	130.0	14626.5	125.0	-52.2	99.9	231.3	8.5	6.6	5.3	400.6	999.9	99.9	999.9	23.5	61.
50.1	138.0	16261.4	100.0	-52.8	99.9	206.9	9.1	4.1	8.1	425.8	999.9	99.9	999.9	25.7	57.
56.3	146.3	18123.4	75.0	-54.4	99.9	164.1	5.8	-1.6	5.5	459.0	999.9	99.9	999.9	27.1	53.
63.8	155.3	21692.7	50.0	-58.0	99.9	36.7	1.2	-0.7	-0.9	506.9	999.9	99.9	999.9	27.9	51.
75.7	165.0	25114.3	25.0	-52.2	99.9	5.9	2.5	-0.3	-2.4	634.7	999.9	99.9	999.9	28.1	50.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 11001
MARSHALL SPACE FLIGHT CENTER

6 MAY 1975
2015 GMT

156 13. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIF DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	PCT T DG K	E POT T DG K	MX RTC GM/KG	RH PCT	RANGE KM	AZ DG
0.7	5.9	180.0	991.6	23.3	17.5	200.0	2.1	0.7	2.0	298.9	332.9	12.8	70.0	0.0	0.
99.9	99.9	59.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
7.6	7.2	327.4	975.0	21.7	16.6	217.3	4.4	7.7	3.5	298.6	331.1	12.3	72.8	0.1	7.
1.5	9.2	552.5	950.0	19.6	16.0	206.9	5.8	2.6	5.1	298.7	330.9	12.2	79.9	0.4	25.
2.3	10.9	782.1	925.0	18.1	13.6	211.0	7.1	3.6	6.1	299.2	327.7	10.7	75.1	0.7	26.
3.2	12.9	1016.5	900.0	16.2	11.1	224.7	9.2	6.5	6.6	299.5	324.5	9.3	71.7	1.1	30.
4.0	15.0	1256.0	875.0	14.8	12.2	228.8	11.7	8.8	7.7	300.5	328.1	10.3	84.4	1.6	36.
4.9	16.8	1501.5	850.0	13.2	12.3	229.5	9.2	7.0	5.9	301.4	330.1	10.7	94.4	2.2	40.
6.0	19.0	1752.4	825.0	11.1	10.7	231.5	11.4	8.9	7.1	301.7	328.5	9.9	97.4	2.8	42.
7.0	21.0	2009.6	800.0	9.3	8.8	240.0	12.0	10.4	6.0	302.2	326.7	9.0	96.8	3.5	45.
8.1	23.2	2272.7	775.0	7.1	6.6	234.6	12.8	10.4	7.4	302.5	324.4	7.9	96.6	4.4	47.
9.3	25.4	2542.3	750.0	5.4	4.8	229.3	15.1	11.5	9.9	303.4	323.4	7.2	95.5	5.3	48.
10.6	27.6	2819.1	725.0	3.5	2.8	219.8	16.8	10.8	12.9	304.1	322.3	6.5	95.2	6.6	47.
11.7	30.0	3103.4	700.0	1.6	0.6	217.6	15.3	9.4	12.1	305.0	321.2	5.7	93.0	7.7	46.
12.8	32.5	3396.2	675.0	-0.2	-2.5	207.4	12.2	5.6	10.9	306.0	319.7	4.8	85.0	8.6	45.
13.8	35.0	3697.8	650.0	-1.2	-9.8	193.0	8.9	2.0	8.7	308.0	316.3	2.8	51.6	9.2	43.
15.0	37.4	4010.1	625.0	-3.1	-11.5	168.5	3.7	-0.7	3.6	309.3	317.0	2.5	52.2	9.5	41.
16.3	40.1	4332.0	600.0	-5.0	-11.7	227.7	3.6	2.6	2.4	310.6	318.5	2.6	59.2	9.5	40.
17.5	42.8	4666.2	575.0	-6.6	-9.3	243.5	8.0	7.2	3.6	312.7	322.6	3.3	81.4	10.1	41.
19.0	45.6	5012.5	550.0	-9.0	-9.6	237.6	11.7	9.9	6.3	313.8	324.0	3.4	95.3	10.8	43.
20.2	48.6	5371.9	525.0	-10.8	-11.5	240.4	11.4	9.9	5.6	315.7	325.0	3.0	95.1	11.7	44.
21.5	51.6	5746.0	500.0	-12.7	-13.4	244.8	9.8	8.9	4.2	317.8	326.3	2.7	94.4	12.5	45.
23.1	54.8	6135.2	475.0	-16.1	-19.4	255.3	7.1	6.8	1.8	318.2	323.8	1.7	76.1	13.2	47.
24.6	57.9	6540.1	450.0	-19.1	-26.7	272.5	7.8	7.7	-0.3	319.3	322.5	1.0	50.8	13.7	48.
26.1	61.4	6961.6	425.0	-23.0	-48.1	280.0	10.4	10.3	-1.8	319.5	319.9	0.1	8.8	14.3	50.
27.5	65.1	7413.9	400.0	-25.4	-36.2	283.5	16.4	16.0	-3.8	322.0	323.5	0.4	35.4	14.9	54.
28.8	68.7	7869.9	375.0	-29.4	-49.5	258.1	16.8	14.8	-7.5	322.6	323.1	0.1	13.5	15.8	58.
30.6	72.6	8359.3	350.0	-31.9	-54.1	299.6	17.9	15.5	-8.9	325.7	325.9	0.1	9.0	16.7	64.
32.4	76.8	8879.0	325.0	-35.8	-59.7	295.3	15.4	13.9	-6.6	327.3	327.4	0.0	6.5	17.8	69.
34.5	81.2	9430.0	300.0	-40.4	99.9	298.4	15.6	13.7	-7.4	328.4	999.9	99.9	999.9	19.2	73.
36.9	85.8	10017.1	275.0	-45.3	99.9	297.5	18.9	16.7	-8.7	329.6	999.9	99.9	999.9	20.9	78.
39.1	90.8	10645.4	250.0	-50.5	99.9	294.0	19.8	18.1	-8.1	330.9	999.9	99.9	999.9	22.9	82.
41.5	96.2	11323.1	225.0	-56.0	99.9	281.5	24.4	23.9	-4.9	332.7	999.9	99.9	999.9	25.6	85.
43.5	101.8	12063.8	200.0	-61.0	99.9	277.8	32.3	32.0	-4.4	336.1	999.9	99.9	999.9	29.1	86.
46.7	108.3	12985.0	175.0	-65.0	99.9	281.1	34.2	33.5	-6.6	342.6	999.9	99.9	999.9	35.0	89.
49.8	115.0	13822.2	150.0	-66.7	99.9	285.9	37.6	36.2	-10.3	355.3	999.9	99.9	999.9	42.1	91.
53.6	122.5	14932.0	125.0	-65.0	99.9	301.0	30.9	26.5	-15.9	377.2	999.9	99.9	999.9	49.6	94.
58.0	130.5	16289.5	100.0	-65.0	99.9	283.8	23.0	22.4	-5.5	402.1	999.9	99.9	999.9	55.5	97.
63.7	138.8	18044.9	75.0	-64.0	99.9	319.7	9.5	6.1	-7.2	438.8	999.9	99.9	999.9	60.9	96.
71.1	147.0	20552.5	50.0	-61.2	99.9	71.6	6.8	-6.5	-2.1	499.2	999.9	99.9	999.9	62.1	100.
82.8	156.0	24356.4	25.0	-52.0	99.9	286.1	2.6	2.5	-0.7	635.3	999.9	99.9	999.9	61.4	100.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 22002
FT. SILL, CKLA

6 MAY 1975
2100 GMT

134 72. 3

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.1	8.5	362.0	963.0	27.0	1.4	270.0	4.1	4.1	0.0	304.0	316.7	4.4	19.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.2	9.6	481.6	950.0	25.5	0.4	253.0	8.4	8.1	2.5	303.7	315.6	4.2	19.3	0.5	71.
1.7	11.5	714.5	925.0	23.2	-0.8	249.2	7.6	7.1	2.7	303.6	314.8	3.9	20.3	1.0	71.
2.9	13.7	951.9	900.0	20.8	-2.6	250.4	7.3	6.9	2.5	303.4	313.0	3.5	20.5	1.5	70.
3.8	15.7	1194.1	875.0	18.6	-3.4	249.8	7.2	6.8	2.5	303.5	313.5	3.4	22.3	1.9	70.
4.9	17.8	1441.2	850.0	16.1	-3.7	258.5	7.2	7.1	1.4	303.5	313.4	3.4	25.2	2.4	71.
6.2	20.1	1693.7	825.0	13.8	-5.1	250.5	8.3	7.9	2.8	303.6	312.8	3.2	26.5	2.9	72.
7.3	22.3	1951.6	800.0	11.4	-6.0	250.5	10.5	9.9	3.5	303.7	312.7	3.1	29.0	3.6	71.
8.3	24.6	2215.6	775.0	9.0	-7.6	240.8	11.1	9.6	5.4	303.9	312.1	2.8	30.1	4.3	71.
9.6	26.7	2496.1	750.0	7.1	-10.6	243.9	15.4	13.9	6.8	304.6	311.4	2.3	26.9	5.2	69.
11.1	29.2	2764.8	725.0	7.1	-10.3	242.9	21.7	19.3	9.9	307.5	314.8	2.4	27.8	7.0	69.
12.6	31.8	3052.4	700.0	5.6	-11.6	228.4	20.1	15.0	13.4	308.9	315.8	2.3	27.8	8.8	66.
13.9	34.3	3348.8	675.0	3.5	-11.2	213.2	20.1	11.0	16.9	309.9	317.3	2.4	33.1	10.2	62.
15.2	36.8	3653.9	650.0	1.7	-13.3	213.0	21.7	11.8	18.2	311.1	317.0	2.1	31.8	11.6	58.
16.4	39.5	3968.9	625.0	-0.5	-13.7	212.8	23.7	12.9	20.0	312.2	318.7	2.1	36.1	13.2	55.
17.7	42.1	4293.5	600.0	-3.4	-19.4	215.1	25.7	14.8	21.0	312.3	316.8	1.4	28.0	15.1	52.
19.2	45.0	4628.3	575.0	-6.3	-28.8	215.1	26.3	15.1	21.5	312.6	314.7	0.6	14.7	17.2	50.
20.6	47.9	4974.9	550.0	-7.4	-32.2	213.2	30.2	16.5	25.3	315.4	317.0	0.5	11.6	19.5	48.
22.0	50.8	5335.9	525.0	-9.6	-33.8	214.9	29.4	16.8	24.1	316.9	318.3	0.4	11.8	22.0	46.
23.4	53.9	5710.6	500.0	-12.0	-35.5	217.7	28.3	17.3	22.4	318.4	319.6	0.4	12.0	24.5	45.
24.9	56.9	6101.3	475.0	-14.7	-37.5	225.0	25.7	18.1	18.1	319.8	320.9	0.3	12.2	26.9	45.
26.6	60.3	6508.3	450.0	-17.8	-39.8	235.1	22.8	18.7	13.1	320.8	321.8	0.3	12.5	29.3	45.
28.4	63.8	6933.2	425.0	-20.8	-42.0	237.7	21.9	18.5	11.7	322.2	323.0	0.2	12.8	31.6	46.
30.1	67.2	7377.5	400.0	-24.8	-45.0	239.0	22.0	18.9	11.3	322.7	323.3	0.2	13.2	34.0	47.
31.9	70.9	7844.3	375.0	-27.7	-47.3	247.9	23.4	21.7	8.8	324.8	325.3	0.1	13.4	36.2	48.
33.8	74.7	8336.5	350.0	-31.2	-49.9	248.4	34.1	31.7	12.6	326.6	327.0	0.1	13.7	39.1	50.
35.8	78.6	8857.6	325.0	-35.0	-52.8	244.1	44.9	40.4	19.6	328.4	328.7	0.1	14.1	43.5	52.
37.9	83.0	9410.2	300.0	-39.8	-59.9	247.7	35.7	33.1	13.6	329.3	999.9	99.9	999.9	49.0	53.
40.1	87.4	9998.9	275.0	-44.5	-69.9	241.2	51.0*	44.7	24.6	330.7	999.9	99.9	999.9	54.8	54.
42.4	92.4	10631.0	250.0	-48.8	-79.9	244.1	42.5*	38.3	18.6	333.5	999.9	99.9	999.9	60.4	55.
44.7	97.4	11316.0	225.0	-53.3	-99.9	249.0	35.1*	32.8	12.6	336.8	999.9	99.9	999.9	65.4	56.
47.2	102.8	12069.5	200.0	-55.9	-99.9	247.9	39.2*	36.3	14.8	344.2	999.9	99.9	999.9	70.5	57.
49.9	109.3	12915.1	175.0	-58.1	-99.9	244.4	54.1*	48.8	23.4	354.1	999.9	99.9	999.9	76.9	58.
52.8	115.8	13879.4	150.0	-59.6	-99.9	250.9	40.2*	38.0	13.1	367.5	999.9	99.9	999.9	86.1	59.
56.1	123.3	15017.7	125.0	-60.3	-99.9	243.4	36.0*	32.2	16.1	385.5	999.9	99.9	999.9	91.3	59.
59.9	131.3	16412.3	100.0	-62.0	-99.9	248.1	19.1*	17.7	7.1	407.9	999.9	99.9	999.9	96.9	60.
64.6	140.7	18175.5	75.0	-65.2	-99.9	999.9	99.9	99.9	99.9	436.2	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

Sounding Data

7 May 1975

0000 GMT

b21

108-130
~~109-130~~

STATION NO. 232
BOOTHVILLE, LA

6 MAY 1975
2315 GMT

160 17. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MR	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.2	1.0	1009.3	26.1	24.3	160.0	6.7	-2.3	6.3	301.1	351.9	19.4	90.0	0.0	0.
0.2	6.9	82.9	1000.0	24.5	23.6	146.5	10.2	-5.6	8.5	300.2	349.2	18.7	94.7	0.4	337.
1.1	8.9	305.3	975.0	22.7	22.2	166.1	12.3	-2.9	11.9	300.3	346.6	17.6	97.4	0.8	332.
1.9	11.1	532.0	950.0	21.5	18.5	172.1	14.1	-1.9	13.9	300.9	339.0	14.4	83.7	1.5	343.
2.7	13.9	763.5	925.0	20.8	12.8	173.5	12.1	-1.4	12.0	302.0	329.5	10.2	60.3	2.1	345.
3.7	15.3	1001.0	900.0	20.3	14.7	190.5	7.4	1.3	7.2	304.0	336.2	11.8	70.3	2.7	348.
4.5	17.3	1244.5	875.0	19.0	15.6	195.2	7.7	2.0	7.4	305.2	340.3	12.9	80.8	3.0	351.
5.4	19.5	1493.5	850.0	17.2	13.4	223.6	6.7	4.6	4.8	305.7	337.1	11.5	78.2	3.3	355.
6.4	21.7	1748.3	825.0	15.2	13.2	221.7	9.2	6.2	6.9	306.3	338.3	11.7	87.9	3.6	1.
7.3	24.0	2018.6	800.0	13.4	3.6	234.0	6.7	5.4	3.9	306.3	323.9	6.2	51.4	3.9	5.
8.3	26.3	2276.6	775.0	14.5	-8.3	265.6	5.8	5.8	0.4	309.9	319.3	3.2	23.5	4.1	10.
9.2	28.6	2552.4	750.0	13.4	-22.6	285.4	6.4	6.2	-1.7	311.2	313.9	0.8	6.5	4.1	14.
10.2	31.2	2836.0	725.0	11.3	-23.6	291.3	8.0	7.4	-2.9	312.0	314.5	0.8	6.8	4.1	20.
11.2	33.7	3127.3	700.0	8.7	-25.0	290.4	9.1	8.6	-3.2	312.2	314.5	0.7	7.1	4.1	27.
12.4	36.3	3426.4	675.0	6.5	-26.1	292.8	11.2	10.4	-4.3	313.0	315.2	0.7	7.5	4.2	37.
13.4	38.9	3734.9	650.0	5.0	-20.5	287.0	12.3	11.8	-3.6	314.7	318.4	1.1	13.8	4.5	46.
14.6	41.5	4053.1	625.0	2.1	-17.9	272.6	14.5	14.4	-0.7	315.1	319.9	1.5	21.1	5.1	54.
15.6	44.1	4381.1	600.0	-0.2	-15.8	262.1	16.5	16.4	2.3	316.1	322.1	1.9	30.1	6.0	60.
16.9	47.0	4720.2	575.0	-3.2	-10.1	260.4	19.5	19.2	3.2	316.6	326.1	3.1	59.1	7.2	63.
18.1	50.0	5070.8	550.0	-5.8	-11.2	267.3	21.9	21.8	1.0	317.5	326.7	3.0	65.7	8.6	66.
19.4	52.9	5433.6	525.0	-9.1	-16.3	271.1	23.8	23.8	-0.5	317.7	324.2	2.0	55.5	10.4	71.
20.9	56.0	5809.2	500.0	-10.7	-42.5	276.9	21.4	21.2	-2.6	320.0	320.7	0.2	5.2	12.3	74.
22.2	59.0	6203.1	475.0	-11.4	-42.8	282.2	18.6	18.2	-3.9	323.9	324.5	0.2	5.3	13.8	77.
23.7	62.4	6615.1	450.0	-14.7	-44.3	286.1	15.7	15.1	-4.4	324.8	325.4	0.2	5.9	15.0	80.
25.2	65.9	7044.8	425.0	-18.2	-46.1	285.4	17.3	16.7	-4.6	325.6	326.1	0.1	6.6	16.4	82.
26.7	69.3	7455.2	400.0	-21.1	-47.6	286.5	19.8	19.0	-5.7	327.5	327.9	0.1	7.1	18.0	84.
28.3	72.8	7967.8	375.0	-25.1	-42.2	292.5	21.2	19.6	-8.1	328.4	329.3	0.2	18.6	19.7	87.
30.0	76.7	8465.1	350.0	-29.2	-34.7	289.0	25.8	24.4	-8.4	329.4	331.4	0.6	58.4	21.8	89.
31.8	81.0	8990.3	325.0	-33.9	-38.9	278.4	30.8	30.4	-4.5	330.0	331.4	0.4	60.2	24.9	91.
33.6	85.0	9546.8	300.0	-38.3	-42.6	276.1	31.2	31.0	-3.3	331.3	332.4	0.3	63.5	28.1	92.
35.7	89.2	10139.1	275.0	-43.1	99.9	275.4	33.9	33.8	-3.2	332.8	999.9	99.9	999.9	32.3	92.
38.0	94.0	10773.7	250.0	-48.6	99.9	277.2	32.2	32.0	-4.0	333.9	999.9	99.9	999.9	37.1	93.
40.3	99.0	11457.0	225.0	-55.1	99.9	278.7	36.6	36.1	-5.6	334.1	999.9	99.9	999.9	41.8	93.
43.0	104.3	12212.1	200.0	-58.8	99.9	283.4	41.9	40.7	-9.7	339.6	999.9	99.9	999.9	48.5	95.
46.4	110.5	13129.7	175.0	-64.3	99.9	277.1	45.8	45.5	-5.7	343.9	999.9	99.9	999.9	57.3	95.
50.1	116.8	13964.2	150.0	-66.7	99.9	280.8	46.3	45.5	-8.7	355.2	999.9	99.9	999.9	66.4	96.
54.6	124.3	15045.7	125.0	-68.4	99.9	259.7	36.2	31.5	-18.0	371.1	999.9	99.9	999.9	79.1	98.
59.7	132.7	16399.3	100.0	-70.5	99.9	287.0	29.4*	28.2	-8.6	391.5	999.9	99.9	999.9	88.8	100.
66.2	141.7	18098.6	75.0	-69.1	99.9	316.2	10.9	7.5	-7.9	428.1	999.9	99.9	999.9	93.9	101.
75.3	151.3	20579.3	50.0	-58.8	99.9	5.0	2.6	-0.2	-2.6	505.1	999.9	99.9	999.9	93.2	101.
89.4	161.5	25042.9	25.0	-47.6	99.9	92.5	9.5	-9.5	0.4	648.0	999.9	99.9	999.9	91.7	102.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 235
JACKSON, MISS

6 MAY 1975
2315 GMT

162 16. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIP DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.7	4.8	100.0	957.5	26.1	16.1	170.0	4.6	-0.8	4.5	301.1	332.2	11.6	54.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.7	6.5	300.8	975.0	23.5	20.3	165.1	6.5	-1.7	6.3	300.9	342.3	15.6	82.5	0.3	342.
1.4	8.7	527.9	950.0	21.5	19.7	172.5	9.4	-1.2	9.3	301.1	341.9	15.4	89.1	0.6	345.
2.2	10.8	759.6	925.0	20.0	18.5	183.9	11.6	0.8	11.6	301.7	340.9	14.7	91.4	1.1	351.
3.0	12.9	996.2	900.0	18.8	16.6	197.4	11.8	3.5	11.2	302.6	338.4	13.3	87.2	1.6	357.
3.7	15.2	1238.5	875.0	17.6	15.4	214.3	11.7	6.6	9.6	303.8	338.2	12.7	87.1	2.1	4.
4.4	17.3	1486.8	850.0	16.4	14.4	230.9	10.1	7.8	6.3	305.0	338.4	12.3	86.1	2.5	11.
5.2	19.7	1741.0	825.0	14.5	13.8	245.0	9.3	8.5	4.0	305.5	338.6	12.1	95.5	2.8	18.
6.3	21.9	2001.0	800.0	12.2	12.0	252.3	9.2	8.8	2.8	305.7	336.1	11.1	98.2	3.1	24.
6.9	24.4	2267.4	775.0	10.5	10.0	251.9	9.6	9.1	3.0	306.4	334.2	10.0	96.8	3.4	30.
7.7	26.7	2540.5	750.0	9.0	7.0	247.4	10.0	9.3	3.9	307.4	331.1	8.4	87.2	3.8	35.
8.5	29.2	2821.4	725.0	7.8	3.1	243.2	10.0	8.9	4.5	308.9	327.9	6.7	72.2	4.3	38.
9.5	31.9	3110.6	700.0	6.6	-1.3	238.4	9.1	7.7	4.8	310.4	325.0	5.0	57.1	4.8	41.
10.3	34.5	3408.5	675.0	4.7	-2.8	235.2	7.8	6.4	4.5	311.5	325.1	4.6	58.1	5.2	42.
11.3	37.0	3715.2	650.0	2.6	-4.1	233.3	8.3	6.7	5.0	312.5	325.4	4.4	61.3	5.6	43.
12.3	39.9	4031.7	625.0	1.0	-7.1	242.0	9.5	8.4	4.5	314.0	324.9	3.6	54.6	6.2	44.
13.3	42.4	4359.4	600.0	-0.8	-11.3	251.7	9.0	8.5	2.8	315.5	323.8	2.7	44.7	6.7	46.
14.4	45.4	4697.6	575.0	-3.2	-19.6	267.2	8.8	8.8	0.4	316.4	321.0	1.4	27.5	7.2	48.
15.4	48.4	5049.2	550.0	-4.2	-23.4	279.6	10.0	9.9	-1.7	319.2	322.7	1.0	20.6	7.6	51.
16.4	51.4	5414.0	525.0	-7.0	-25.7	282.1	10.9	10.6	-2.3	320.1	323.1	0.9	20.8	8.0	55.
17.7	54.5	5792.7	500.0	-9.5	-27.6	280.7	16.1	15.8	-3.0	321.5	324.2	0.8	21.1	8.7	60.
18.9	57.6	6186.5	475.0	-12.5	-30.0	275.8	20.2	20.1	-2.0	322.6	324.8	0.7	21.3	9.8	65.
20.1	61.1	6597.4	450.0	-15.3	-32.3	271.2	20.7	20.7	-0.4	324.0	326.0	0.6	21.6	11.2	68.
21.5	64.6	7027.6	425.0	-17.6	-34.2	280.3	19.3	19.0	-3.4	326.4	328.1	0.5	21.8	12.7	72.
23.0	68.3	7478.2	400.0	-21.1	-37.0	286.8	19.9	19.0	-5.7	327.6	329.0	0.4	22.1	14.1	75.
24.7	71.7	7951.0	375.0	-25.1	-36.9	285.3	24.1	23.3	-6.3	328.3	329.9	0.4	32.1	16.1	79.
26.4	75.7	8447.6	350.0	-29.8	-40.6	282.3	28.4	27.0	-8.9	328.5	329.7	0.3	33.6	18.5	83.
28.2	79.8	8971.1	325.0	-33.9	-42.9	287.6	30.4	29.0	-9.2	329.8	330.8	0.3	39.6	21.5	87.
29.9	84.3	9526.6	300.0	-38.6	-47.5	285.5	36.6	35.3	-9.8	330.8	331.5	0.2	38.2	24.7	89.
31.8	88.5	10119.0	275.0	-43.0	99.9	282.2	42.3	41.3	-8.9	333.0	999.9	99.9	999.9	29.0	92.
33.9	93.4	10754.1	250.0	-47.9	99.9	278.2	44.1	43.6	-6.3	334.9	999.9	99.9	999.9	34.5	93.
36.3	98.5	11442.0	225.0	-52.8	99.9	282.1	36.3	35.5	-7.6	337.7	999.9	99.9	999.9	40.0	94.
38.9	104.3	12192.4	200.0	-58.6	99.9	281.2	40.2	39.4	-7.8	339.9	999.9	99.9	999.9	46.4	95.
41.8	110.2	13015.3	175.0	-64.2	99.9	277.7	38.0	37.7	-5.1	343.9	999.9	99.9	999.9	52.7	96.
45.0	116.7	13956.2	150.0	-65.5	99.9	273.0	40.6	40.5	-2.1	357.4	999.9	99.9	999.9	61.3	95.
49.1	124.3	15071.4	125.0	-64.6	99.9	287.8	43.4	41.3	-13.2	378.0	999.9	99.9	999.9	71.6	98.
53.7	132.7	16425.6	100.0	-66.3	99.9	291.2	27.9	26.0	-10.1	399.7	999.9	99.9	999.9	81.4	98.
59.5	141.7	18176.4	75.0	-68.2	99.9	325.9	3.0	1.7	-2.5	429.9	999.9	99.9	999.9	87.4	99.
67.4	151.3	20667.2	50.0	-61.7	99.9	37.1	8.3	-5.0	-5.6	498.2	999.9	99.9	999.9	89.6	100.
80.3	161.5	25105.7	25.0	-49.8	99.9	103.4	5.8	-5.7	1.4	641.8	999.9	99.9	999.9	85.9	100.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 240
LAKE CHARLES, LA

6 MAY 1975
2315 GMT

158 16. 0

TIME MIN	CATCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.4	5.0	1006.6	26.7	23.4	140.0	5.7	-3.7	4.4	301.8	350.1	18.3	82.0	0.0	0.
0.1	5.0	63.4	1000.0	26.4	23.9	143.9	7.4	-4.3	5.9	302.1	352.3	19.0	86.1	0.3	339.
1.0	6.5	287.2	975.0	23.8	22.7	150.5	7.2	-3.6	6.3	301.6	349.5	18.2	93.5	0.5	334.
1.8	8.5	514.8	950.0	22.2	20.6	160.4	7.4	-2.5	7.0	301.9	345.2	16.3	90.6	0.9	335.
2.7	10.3	747.2	925.0	21.1	18.6	160.6	6.4	-2.1	6.1	302.8	342.3	14.8	85.8	1.3	337.
3.6	12.3	984.6	900.0	19.2	17.5	153.6	5.6	-2.5	5.0	303.2	341.3	14.2	90.1	1.6	337.
4.6	14.3	1227.3	875.0	17.7	16.4	175.3	5.4	-0.4	5.4	304.0	340.7	13.6	92.4	1.9	338.
5.6	16.2	1476.1	850.0	18.3	13.1	205.8	8.0	3.5	7.2	306.8	337.9	11.3	71.9	2.2	343.
6.5	18.3	1731.8	825.0	16.3	13.4	199.9	9.6	3.3	9.0	307.4	340.1	11.9	83.5	2.6	351.
7.4	20.4	1994.1	800.0	15.4	11.1	197.8	9.7	3.0	9.3	309.0	338.2	10.5	75.4	3.1	355.
8.4	22.5	2263.2	775.0	13.9	6.0	193.1	9.5	2.2	9.3	305.8	331.4	7.6	58.9	3.6	359.
9.3	24.7	2539.8	750.0	13.6	-5.7	188.1	7.6	1.1	7.5	311.8	321.9	3.4	25.7	4.1	360.
10.4	26.9	2824.0	725.0	11.5	-9.9	187.5	5.4	0.7	5.3	312.4	320.0	2.5	21.1	4.5	0.
11.5	29.1	3115.6	700.0	8.8	-13.0	203.5	3.9	1.6	3.6	312.5	318.8	2.0	19.8	4.8	1.
12.7	31.6	3415.3	675.0	6.9	-15.3	231.5	6.6	5.2	4.1	313.6	319.0	1.7	18.6	5.1	3.
13.8	34.1	3724.2	650.0	4.9	-14.0	236.3	10.4	8.5	6.1	314.7	321.0	2.0	23.9	5.5	8.
15.1	36.4	4042.6	625.0	2.7	-11.2	232.0	14.8	11.6	9.1	315.9	324.1	2.7	35.9	6.1	14.
16.2	39.0	4371.9	600.0	1.0	-4.2	234.7	18.9	15.4	11.0	317.9	332.0	4.7	68.1	7.1	20.
17.5	41.4	4713.0	575.0	-1.4	-7.1	238.6	20.8	17.8	10.9	318.8	330.8	3.9	65.5	8.4	26.
18.7	44.2	5065.6	550.0	-4.6	-11.1	999.9	99.9	99.9	99.9	319.0	328.3	3.0	60.2	999.9	999.
20.0	47.1	5429.9	525.0	-7.7	-15.8	999.9	99.9	99.9	99.9	319.5	326.2	2.1	51.7	999.9	999.
21.3	50.0	5817.7	500.0	-10.0	-24.3	999.9	99.9	99.9	99.9	321.0	324.5	1.1	29.8	999.9	999.
22.6	52.8	6201.8	475.0	-12.2	-42.7	999.9	99.9	99.9	99.9	322.8	323.5	0.2	5.7	999.9	999.
24.0	55.8	6613.2	450.0	-14.7	-44.2	999.9	99.9	99.9	99.9	324.7	325.4	0.2	6.0	999.9	999.
25.4	59.0	7043.3	425.0	-17.5	-45.9	999.9	99.9	99.9	99.9	326.4	327.0	0.1	6.3	999.9	999.
27.1	62.4	7494.5	400.0	-20.8	-48.0	999.9	99.9	99.9	99.9	327.8	328.3	0.1	6.7	999.9	999.
28.9	65.8	7968.0	375.0	-24.7	-38.8	999.9	99.9	99.9	99.9	328.9	330.2	0.3	25.5	999.9	999.
30.8	69.3	8465.7	350.0	-29.0	-40.4	999.9	99.9	99.9	99.9	329.7	330.8	0.3	32.0	999.9	999.
32.7	73.0	8991.2	325.0	-32.7	-37.4	999.9	99.9	99.9	99.9	331.6	333.3	0.5	62.5	999.9	999.
34.5	77.2	9550.3	300.0	-36.7	-40.3	999.9	99.9	99.9	99.9	333.5	334.9	0.4	68.9	999.9	999.
36.5	81.4	10146.2	275.0	-42.0	99.9	999.9	99.9	99.9	99.9	334.4	999.9	99.9	999.9	999.9	999.
38.6	85.8	10784.1	250.0	-47.4	99.9	999.9	99.9	99.9	99.9	335.6	999.9	99.9	999.9	999.9	999.
40.7	90.8	11471.4	225.0	-53.5	99.9	999.9	99.9	99.9	99.9	336.5	999.9	99.9	999.9	999.9	999.
43.2	96.0	12217.3	200.0	-59.5	99.9	999.9	99.9	99.9	99.9	338.5	999.9	99.9	999.9	999.9	999.
45.5	101.8	13047.8	175.0	-61.9	99.9	999.9	99.9	99.9	99.9	347.8	999.9	99.9	999.9	999.9	999.
50.5	108.5	13996.0	150.0	-64.3	99.9	999.9	99.9	99.9	99.9	359.3	999.9	99.9	999.9	999.9	999.
54.7	115.6	15105.4	125.0	-66.7	99.9	999.9	99.9	99.9	99.9	374.2	999.9	99.9	999.9	999.9	999.
59.9	124.3	16438.3	100.0	-70.8	99.9	999.9	99.9	99.9	99.9	391.0	999.9	99.9	999.9	999.9	999.
66.4	134.0	18140.7	75.0	-72.2	99.9	999.9	99.9	99.9	99.9	421.6	999.9	99.9	999.9	999.9	999.
75.6	144.5	20598.0	50.0	-61.0	99.9	999.9	99.9	99.9	99.9	499.9	999.9	99.9	999.9	999.9	999.
90.1	156.5	25001.9	25.0	-50.6	99.9	999.9	99.9	99.9	99.9	639.5	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 248
SHREVEPORT, LA

6 MAY 1975
2315 GMT

163 12. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.1	79.0	995.6	27.8	22.7	150.0	5.2	-2.6	4.5	303.8	351.2	17.8	74.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.6	6.6	264.9	975.0	26.2	23.2	125.0	6.6	-5.4	3.8	304.0	353.8	18.7	83.6	0.3	316.
1.6	8.9	494.2	950.0	24.3	22.3	149.6	7.3	-3.7	6.3	304.3	352.7	18.2	88.8	0.7	317.
2.6	11.0	728.3	925.0	23.0	21.2	183.1	7.5	0.4	7.5	305.2	352.0	17.4	89.5	1.1	326.
3.6	13.3	967.7	900.0	21.2	19.6	184.4	8.2	0.6	8.2	305.6	349.1	16.2	90.2	1.5	339.
4.7	15.6	1212.1	875.0	19.4	17.8	192.7	10.5	2.3	10.2	305.9	345.2	14.8	90.5	2.1	348.
5.8	17.9	1461.6	850.0	17.7	15.4	200.4	9.6	3.4	9.0	306.5	342.1	13.1	86.1	2.6	354.
6.8	20.3	1717.2	825.0	16.5	10.9	202.5	9.2	3.5	8.5	307.4	335.2	10.0	69.4	3.2	359.
7.8	22.7	1979.3	800.0	15.7	6.4	217.3	6.9	4.2	5.5	308.9	330.4	7.6	54.1	3.6	3.
8.9	25.2	2248.8	775.0	15.6	-0.2	253.0	4.0	3.8	1.2	311.2	325.6	4.9	34.2	3.9	7.
10.0	27.6	2526.1	750.0	13.7	-5.5	277.4	4.8	4.8	-0.6	311.9	322.1	3.4	25.9	3.8	11.
11.1	30.2	2810.3	725.0	11.4	-7.4	264.5	6.1	6.1	0.6	312.4	321.6	3.0	26.0	3.9	16.
12.3	32.9	3101.9	700.0	8.8	-9.6	264.4	7.5	7.5	0.7	312.5	320.6	2.6	26.0	4.1	22.
13.4	35.5	3401.4	675.0	6.2	-11.8	260.0	7.4	7.3	1.3	312.8	319.9	2.3	26.1	4.4	28.
14.7	38.1	3709.0	650.0	3.5	-11.9	248.5	7.2	6.7	2.6	313.2	320.5	2.4	31.2	4.8	33.
16.0	40.8	4026.6	625.0	2.0	-13.3	254.7	11.6	11.2	3.1	315.0	321.9	2.2	31.1	5.4	37.
17.3	43.8	4354.8	600.0	-0.4	-13.3	253.6	15.7	15.1	4.4	316.0	323.1	2.3	36.8	6.2	43.
18.6	46.7	4693.8	575.0	-2.9	-13.6	250.2	19.5	18.3	8.6	316.9	324.2	2.3	43.3	7.4	48.
19.9	49.8	5044.7	550.0	-5.2	-14.0	246.2	24.5	22.4	9.9	318.2	325.6	2.3	49.7	9.1	52.
21.2	52.6	5408.2	525.0	-8.4	-15.6	247.5	26.5	24.5	10.2	318.5	325.3	2.1	55.9	11.1	55.
22.6	55.7	5785.4	500.0	-10.0	-25.0	243.7	24.6	23.6	6.9	321.0	324.3	1.0	27.8	13.3	57.
24.3	59.0	6179.1	475.0	-12.3	-36.1	254.7	20.0	19.3	5.3	322.7	324.0	0.4	11.6	15.4	60.
26.1	62.4	6590.3	450.0	-15.0	-38.0	246.7	20.5	18.8	8.1	324.4	325.5	0.3	11.9	17.5	61.
27.9	65.8	7021.1	425.0	-17.4	-39.8	245.5	19.3	17.5	8.0	326.6	327.6	0.3	12.1	19.7	61.
29.6	69.3	7471.2	400.0	-21.2	-42.0	254.5	19.6	18.9	5.2	327.4	328.3	0.2	13.3	21.6	62.
31.5	73.0	7942.9	375.0	-26.0	-41.7	265.3	20.0	19.9	1.6	327.1	328.1	0.3	21.2	23.7	64.
33.3	76.8	8438.3	350.0	-30.4	-40.4	276.6	22.0	21.9	-2.5	327.7	328.8	0.3	36.6	26.0	66.
35.5	80.7	8961.7	325.0	-33.7	-36.4	271.5	29.3	29.3	-0.7	330.3	332.1	0.5	76.0	28.8	69.
37.6	85.1	9518.0	300.0	-38.0	-41.6	268.7	27.3	27.3	0.6	331.8	333.0	0.3	67.9	32.4	72.
39.6	89.2	10111.0	275.0	-42.8	99.9	252.0	26.5	27.1	8.8	333.2	999.9	99.9	999.9	35.9	73.
42.2	94.0	10746.4	250.0	-48.3	99.9	249.6	30.8	28.9	10.7	334.3	999.9	99.9	999.9	43.3	72.
44.7	98.8	11434.8	225.0	-52.8	99.9	262.1	28.2	28.0	3.9	337.6	999.9	99.9	999.9	44.7	72.
47.0	104.0	12187.4	200.0	-57.0	99.9	257.7	38.0	37.1	8.1	342.5	999.9	99.9	999.9	49.2	73.
49.9	110.0	13020.1	175.0	-62.6	99.9	257.3	34.2	33.4	7.5	346.6	999.9	99.9	999.9	56.1	74.
53.5	116.0	13968.5	150.0	-64.1	99.9	270.4	28.2	28.2	-0.2	359.6	999.9	99.9	999.9	62.7	75.
57.8	123.3	15079.2	125.0	-64.9	99.9	282.3	41.5	40.6	-8.9	377.5	999.9	99.9	999.9	71.8	78.
62.9	131.0	16423.9	100.0	-67.4	99.9	278.0	23.4	23.2	-3.3	397.5	999.9	99.9	999.9	81.9	81.
70.1	139.7	18158.6	75.0	-67.6	99.9	350.1	5.4	0.9	-5.3	431.3	999.9	99.9	999.9	87.9	84.
79.9	149.3	20628.1	50.0	-63.0	99.9	27.8	6.2	-2.9	-5.5	445.1	999.9	99.9	999.9	88.3	84.
95.5	160.5	25024.4	25.0	-51.6	99.9	330.1	1.8	0.9	-1.6	636.5	999.9	99.9	999.9	86.1	84.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 250
BROWNSVILLE, TEX

6 MAY 1975
2315 GMT

152 28. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GH/KG	RH PCT	RANGE KM	AZ DG
0.0	5.0	7.0	1000.5	31.1	24.5	130.0	7.2	-5.5	4.6	306.9	360.1	19.7	68.0	0.0	0.
0.0	5.1	11.5	1000.0	31.0	24.5	129.9	7.2	-5.5	4.6	306.9	360.0	19.7	68.4	0.0	359.
0.9	6.0	237.9	975.0	26.6	24.4	125.4	7.1	-5.8	4.1	304.7	358.5	20.2	88.1	0.5	311.
1.7	8.6	468.1	950.0	25.4	24.1	125.4	3.5	-2.9	2.7	305.7	360.0	20.3	92.4	0.8	308.
2.5	10.5	704.5	925.0	26.0	22.5	319.5	2.4	1.9	-1.5	308.5	359.8	18.9	81.1	0.8	309.
3.4	12.4	946.5	900.0	25.5	16.3	337.1	5.5	2.1	-5.1	309.6	346.0	13.1	57.3	0.6	304.
4.2	14.4	1186.4	875.0	26.6	12.4	326.2	6.6	3.7	-5.5	312.9	342.5	10.5	41.5	0.4	269.
5.0	16.3	1450.9	850.0	25.6	9.1	316.5	7.4	5.1	-5.4	314.1	338.8	8.6	35.3	0.2	213.
5.8	18.4	1712.8	825.0	24.3	6.2	308.2	5.8	4.5	-3.6	315.2	336.4	7.2	31.3	0.5	169.
6.5	20.5	1981.2	800.0	22.3	4.5	258.5	4.9	4.8	1.0	315.2	335.2	6.6	31.3	0.0	150.
7.3	22.6	2255.9	775.0	20.3	2.5	234.6	5.7	4.7	3.3	316.4	334.0	5.9	30.0	0.7	125.
8.1	24.8	2537.6	750.0	18.3	-0.0	231.5	6.4	5.0	4.0	317.1	332.4	5.1	29.1	0.8	103.
9.1	26.9	2826.7	725.0	15.8	-3.0	245.5	8.3	7.5	3.4	317.4	330.2	4.2	27.2	1.1	88.
10.0	29.3	3123.2	700.0	13.6	-4.7	246.4	11.8	10.8	4.7	318.0	329.9	3.9	27.8	1.6	82.
10.9	31.7	3428.3	675.0	11.7	-5.3	237.5	15.2	12.8	8.2	319.3	331.1	3.8	29.9	2.4	76.
12.0	34.1	3742.9	650.0	9.6	-7.6	225.5	16.1	11.5	11.3	320.3	330.7	3.8	28.9	3.3	69.
13.1	36.5	4066.9	625.0	6.6	-5.2	220.0	19.2	12.3	14.7	320.5	333.3	4.2	42.8	4.4	62.
14.1	39.1	4400.2	600.0	3.4	-7.1	219.4	19.7	12.5	15.1	320.5	332.1	3.8	46.3	5.6	57.
15.4	41.6	4743.7	575.0	0.4	-14.4	223.3	17.0	11.7	12.4	320.7	327.7	2.2	32.1	6.9	53.
16.8	44.3	5098.5	550.0	-2.3	-15.8	231.1	15.5	12.1	9.7	321.5	328.1	2.0	34.8	8.2	52.
18.1	47.1	5465.8	525.0	-5.1	-20.9	235.3	17.0	14.0	9.7	322.5	327.0	1.4	27.6	9.4	53.
19.4	50.1	5846.9	500.0	-8.1	-21.9	242.2	21.1	18.6	9.8	323.3	327.7	1.3	31.6	10.9	53.
20.5	52.9	6243.1	475.0	-10.9	-24.0	248.9	22.0	20.5	7.9	324.6	328.4	1.1	32.9	12.5	55.
21.8	55.8	6657.2	450.0	-13.4	-27.0	248.4	21.0	19.5	7.7	326.5	329.7	0.9	30.0	14.0	57.
23.0	59.1	7090.0	425.0	-15.8	-31.0	243.9	22.9	20.5	10.1	328.7	331.1	0.7	25.6	15.6	58.
24.5	62.6	7544.9	400.0	-18.7	-33.5	239.2	23.3	20.0	11.9	330.6	332.6	0.6	25.7	17.6	58.
26.0	65.9	8021.8	375.0	-23.0	-36.8	233.7	25.3	20.4	15.0	331.1	332.7	0.4	26.9	19.9	58.
27.7	69.6	8524.1	350.0	-26.4	-39.0	229.6	25.1	19.1	16.3	333.1	334.4	0.4	29.3	22.4	57.
29.5	73.3	9054.7	325.0	-31.3	-42.2	236.9	26.3	22.0	14.4	333.5	334.5	0.3	32.8	25.1	57.
31.2	77.5	9616.1	300.0	-36.2	-45.0	244.5	28.8	26.0	12.4	334.2	335.1	0.2	39.4	27.9	57.
33.1	81.7	10213.1	275.0	-41.3	-49.9	249.1	31.4	29.4	11.2	335.3	999.9	99.9	999.9	31.2	58.
35.4	86.0	10853.3	250.0	-46.3	-54.9	250.2	30.6	28.8	10.4	337.3	999.9	99.9	999.9	35.4	60.
38.0	91.2	11545.4	225.0	-51.1	-59.9	256.1	38.9	37.8	9.3	340.1	999.9	99.9	999.9	40.9	62.
40.8	96.5	12302.9	200.0	-55.3	-64.9	259.7	44.4	43.7	8.0	345.2	999.9	99.9	999.9	47.6	64.
43.6	102.3	13145.0	175.0	-60.6	-69.9	264.0	41.1	40.9	4.3	350.0	999.9	99.9	999.9	55.0	66.
47.4	109.3	14096.0	150.0	-63.8	-74.9	256.9	34.8	33.9	7.9	360.2	999.9	99.9	999.9	63.5	68.
51.1	116.3	15203.4	125.0	-67.9	-79.9	271.4	24.9	24.8	-0.6	372.0	999.9	99.9	999.9	70.7	70.
55.6	125.3	16539.5	100.0	-71.7	-84.9	289.3	5.8	5.4	-1.9	389.1	999.9	99.9	999.9	75.3	70.
61.0	135.3	18202.9	75.0	-74.5	-89.9	87.2	3.7	-3.7	-0.2	416.7	999.9	99.9	999.9	76.6	71.
69.2	146.0	20670.9	50.0	-58.5	-94.9	47.3	6.7	-4.9	-4.5	505.6	999.9	99.9	999.9	75.3	71.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 255
VICTORIA, TEX

6 MAY 1975
2315 GMT

165 16. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	KX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.3	33.0	1000.0	27.9	23.9	130.0	5.7	-4.4	3.7	303.7	354.3	19.1	79.0	0.0	6.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
0.8	6.8	258.5	975.0	26.2	24.6	999.9	99.9	99.9	99.9	304.3	358.6	20.4	90.7	999.9	999.
1.6	8.9	488.2	950.0	24.4	23.2	999.9	99.9	99.9	99.9	304.5	355.9	19.3	93.5	999.9	999.
2.5	10.9	722.3	925.0	22.1	20.9	121.9	2.3	-2.0	1.2	304.2	350.1	17.1	93.1	0.7	304.
3.3	13.1	961.2	900.0	20.9	19.7	144.9	1.7	-1.0	1.4	305.2	349.1	16.3	93.1	0.8	305.
4.3	15.3	1205.8	875.0	19.8	18.1	151.7	3.1	-1.5	2.8	306.4	347.6	15.2	90.1	0.9	308.
5.3	17.4	1456.4	850.0	18.7	16.8	156.1	4.7	-1.9	4.3	307.7	347.0	14.4	88.6	1.1	313.
6.2	19.7	1712.8	825.0	16.7	13.3	164.5	6.4	-1.7	6.1	307.8	340.3	11.8	80.4	1.4	318.
7.1	21.9	1976.4	800.0	18.9	9.6	170.9	12.0	-1.9	11.9	312.5	339.4	9.4	54.9	1.8	326.
7.9	24.3	2248.9	775.0	18.2	2.6	178.0	11.7	-0.4	11.7	314.2	331.7	6.0	35.2	2.4	333.
8.9	26.5	2520.9	750.0	16.4	-1.6	186.9	9.5	1.1	9.4	315.0	324.0	4.5	29.1	3.0	339.
10.0	29.0	2815.8	725.0	14.1	-2.7	200.1	7.8	2.7	7.3	315.5	328.5	4.3	31.3	3.5	344.
11.1	31.6	3111.1	700.0	11.4	6.2	207.1	9.0	4.1	8.0	316.2	341.0	8.5	70.3	3.9	350.
12.3	34.2	3414.3	675.0	8.8	5.1	207.3	11.6	5.3	10.3	316.6	340.6	8.2	77.6	4.5	355.
13.4	36.7	3726.4	650.0	6.9	0.6	209.9	15.5	7.7	13.5	317.6	336.1	6.2	64.3	5.3	0.
14.6	39.4	4047.7	625.0	4.6	-8.1	212.2	17.4	9.3	14.7	318.2	328.4	3.3	39.0	6.3	6.
16.0	42.1	4378.9	600.0	2.2	-11.0	214.7	17.9	10.2	14.7	319.1	327.7	2.8	36.8	7.6	11.
17.3	45.0	4720.5	575.0	-1.5	-12.2	217.2	17.5	10.6	13.9	318.6	326.8	2.6	43.7	8.9	15.
18.5	48.0	5072.8	550.0	-4.3	-27.5	229.3	17.8	13.5	11.6	319.1	321.5	0.7	14.2	10.1	18.
19.8	50.8	5438.5	525.0	-5.5	-48.5	238.9	20.1	17.2	10.4	321.8	322.2	0.1	1.8	11.3	22.
21.1	54.0	5818.9	500.0	-8.3	-49.3	244.4	21.4	19.3	9.2	322.9	323.2	0.1	2.0	12.6	27.
22.6	57.0	6214.4	475.0	-11.2	-49.9	249.4	21.0	19.0	7.4	324.1	324.4	0.1	2.4	14.1	32.
24.1	60.3	6627.1	450.0	-14.2	-50.8	251.6	23.0	21.8	7.2	325.4	325.7	0.1	2.7	15.8	37.
25.7	63.9	7058.3	425.0	-17.2	-51.9	247.6	25.4	23.5	9.7	326.9	327.2	0.1	3.1	17.7	41.
27.3	67.3	7509.9	400.0	-20.4	-49.3	254.0	26.6	25.0	7.3	328.4	328.8	0.1	5.5	19.9	44.
29.0	70.9	7984.1	375.0	-24.4	-46.2	251.8	28.7	27.2	9.0	329.2	329.8	0.2	11.1	22.5	48.
30.9	74.8	8482.1	350.0	-29.0	-43.9	252.4	29.7	28.3	9.0	329.6	330.4	0.2	22.1	25.4	51.
32.8	79.0	9007.0	325.0	-34.0	-41.7	250.6	31.0	29.3	10.3	329.8	330.9	0.3	45.1	28.7	53.
34.8	83.2	9565.6	300.0	-36.8	-41.1	245.7	37.0	33.7	15.2	333.4	334.7	0.3	64.0	33.0	55.
36.8	87.5	10161.6	275.0	-41.6	99.9	248.5	37.9	35.3	13.9	335.0	999.9	99.9	999.9	37.3	56.
39.0	92.4	10800.8	250.0	-46.7	99.9	253.2	42.9	41.1	12.4	336.7	999.9	99.9	999.9	42.5	58.
41.3	97.4	11490.4	225.0	-52.8	99.9	261.0	37.1	36.7	5.8	337.6	999.9	99.9	999.9	48.0	60.
44.3	103.0	12243.4	200.0	-56.5	99.9	257.0	47.6	46.4	10.7	343.3	999.9	99.9	999.9	54.9	63.
47.3	109.3	13083.9	175.0	-59.8	99.9	258.6	44.2	43.3	8.7	351.2	999.9	99.9	999.9	62.9	65.
50.8	116.0	14042.5	150.0	-62.5	99.9	253.5	43.4	41.6	12.3	362.5	999.9	99.9	999.9	71.4	66.
54.7	123.7	15158.1	125.0	-64.9	99.9	275.0	36.4	36.2	-3.2	377.5	999.9	99.9	999.9	80.9	68.
59.6	132.7	16504.7	100.0	-70.5	99.9	280.0	19.7	19.4	-3.4	391.5	999.9	99.9	999.9	86.6	71.
65.6	142.5	18197.1	75.0	-73.2	99.9	273.7	6.4	6.4	-0.4	419.4	999.9	99.9	999.9	91.1	72.
74.5	153.5	20656.6	50.0	-55.5	99.9	310.2	3.4	2.6	-2.2	503.4	999.9	99.9	999.9	90.6	72.
88.9	165.0	25077.5	25.0	-49.4	99.9	46.9	6.4	-4.7	-4.4	642.6	999.9	99.9	999.9	88.7	73.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 260
STEPHENVILLE, TEX

6 MAY 1975

2315 GMT

153 13. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.1	399.0	559.9	27.5	7.9	15.0	2.1	-0.5	-2.0	305.2	324.8	7.0	29.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.3	10.0	490.5	950.0	26.4	7.6	197.2	2.2	0.6	2.1	305.0	324.4	6.9	30.3	0.3	194.
1.3	11.9	724.5	925.0	23.8	5.7	8.6	3.0	-0.5	-3.0	304.5	322.0	6.2	31.1	0.3	193.
2.2	14.1	962.9	900.0	21.8	4.6	6.9	4.5	-0.5	-4.5	304.8	321.5	5.9	32.5	0.6	191.
3.0	16.1	1206.3	875.0	19.6	3.8	358.3	3.7	0.1	-3.7	304.9	321.3	5.8	35.1	0.8	190.
3.8	18.4	1454.7	850.0	17.0	3.2	356.3	3.3	0.2	-3.3	304.7	320.8	5.7	39.6	1.0	187.
4.7	20.6	1702.2	825.0	14.7	-0.7	3.8	2.8	-0.2	-2.8	304.7	317.4	4.4	34.9	1.1	186.
5.6	22.8	1967.4	800.0	13.4	-5.0	334.7	1.7	0.7	-1.5	305.8	315.5	3.3	27.5	1.3	185.
6.4	25.2	2234.0	775.0	12.2	-2.9	193.6	1.7	0.4	1.6	307.5	319.2	4.0	35.0	1.3	184.
7.4	27.4	2507.9	750.0	10.1	4.5	221.0	6.4	4.2	4.8	308.4	328.6	7.1	69.0	1.1	178.
8.3	29.9	2789.3	725.0	8.0	4.8	230.0	10.8	8.3	7.0	309.3	330.5	7.5	80.0	0.8	154.
9.3	32.5	3079.1	700.0	6.9	0.4	228.6	15.6	11.7	10.3	310.9	327.3	5.6	63.0	1.0	104.
10.2	35.1	3377.7	675.0	6.3	-9.6	227.6	18.4	13.6	12.4	313.0	321.4	2.7	30.8	1.8	75.
11.3	37.6	3685.8	650.0	3.6	-6.4	224.1	20.0	13.9	14.3	313.6	324.6	3.7	48.3	3.0	64.
12.4	40.3	4003.0	625.0	1.0	-7.9	220.7	22.1	14.4	16.8	314.0	324.3	3.4	51.6	4.3	57.
13.6	42.8	4329.9	600.0	-1.4	-12.8	219.7	23.9	15.2	18.4	314.8	322.2	2.4	41.5	5.9	52.
14.9	45.7	4667.3	575.0	-4.3	-13.9	220.6	24.5	16.0	18.6	315.2	322.3	2.3	47.1	7.7	49.
16.0	48.6	5015.9	550.0	-6.8	-28.7	228.7	24.7	18.5	16.3	316.0	318.2	0.6	15.5	9.4	48.
17.4	51.4	5377.5	525.0	-8.8	-31.3	236.8	25.3	21.2	13.9	317.9	319.7	0.5	14.2	11.4	49.
18.7	54.5	5753.6	500.0	-11.5	-33.3	233.9	26.7	21.6	15.7	319.0	320.6	0.5	14.4	13.5	50.
20.0	57.5	6145.4	475.0	-13.4	-34.7	230.4	28.2	21.7	18.0	321.4	322.9	0.4	14.6	15.7	50.
21.5	60.9	6554.6	450.0	-16.0	-36.7	232.8	28.4	22.6	17.2	323.0	324.3	0.4	14.9	18.2	51.
22.9	64.3	6982.8	425.0	-18.9	-38.9	237.6	27.8	23.5	14.9	324.7	325.8	0.3	15.1	20.5	51.
24.4	67.5	7432.1	400.0	-21.7	-41.0	243.8	28.2	25.3	12.5	326.8	327.7	0.3	15.4	23.1	52.
26.0	71.0	7903.4	375.0	-25.6	-44.0	244.6	35.3	31.9	15.1	327.6	328.4	0.2	15.8	25.8	53.
27.6	75.0	8399.0	350.0	-29.9	-45.0	245.4	41.1	37.4	17.1	328.4	329.1	0.2	21.1	29.5	55.
29.2	79.0	8922.3	325.0	-34.5	-43.5	242.7	41.1	36.6	18.8	329.0	329.9	0.2	39.5	33.5	56.
31.1	83.0	9476.5	300.0	-38.6	-46.9	241.6	43.1	37.9	20.4	330.8	331.5	0.2	40.7	38.0	57.
33.2	87.2	10070.3	275.0	-41.7	99.9	237.8	48.3	40.9	25.8	334.8	999.9	99.9	999.9	44.8	57.
35.4	92.0	10708.4	250.0	-47.3	99.9	240.6	38.6	33.6	19.0	335.7	999.9	99.9	999.9	50.2	57.
38.0	96.8	11398.0	225.0	-52.3	99.9	244.4	42.5	38.3	18.4	338.4	999.9	99.9	999.9	56.8	58.
41.0	102.3	12152.1	200.0	-56.6	99.9	245.4	47.1*	42.8	19.6	343.2	999.9	99.9	999.9	65.2	59.
43.8	108.3	12991.2	175.0	-59.9	99.9	248.1	40.6*	37.7	15.1	351.2	999.9	99.9	999.9	73.0	59.
47.3	114.5	13956.7	150.0	-60.1	99.9	249.0	50.4*	47.1	18.0	366.5	999.9	99.9	999.9	80.9	61.
51.8	121.7	15095.8	125.0	-61.3	99.9	264.9	37.2*	37.1	3.3	384.1	999.9	99.9	999.9	92.2	62.
56.9	129.7	16458.5	100.0	-66.3	99.9	255.3	35.2*	34.1	9.0	399.7	999.9	99.9	999.9	103.7	65.
62.9	138.3	18196.7	75.0	-70.2	99.9	228.3	5.0*	3.8	3.4	425.7	999.9	99.9	999.9	108.1	65.
71.7	147.3	20680.5	50.0	-60.4	99.9	340.8	5.7	1.9	-5.4	501.2	999.9	99.9	999.9	107.0	64.
84.5	156.5	25102.9	25.0	-49.7	99.9	309.4	3.0	2.3	-1.9	641.9	999.9	99.9	999.9	106.3	64.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 261
DEL RIO, TEX

6 MAY 1975
2315 GMT

151 43. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.1	314.0	966.7	33.7	-0.8	350.0	3.6	0.6	-3.5	310.4	321.5	3.7	11.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.5	10.5	470.6	950.0	31.6	1.4	326.7	4.7	2.6	-4.0	309.9	323.3	4.6	14.9	0.2	165.
1.2	12.7	708.6	925.0	29.6	3.3	37.0	5.7	-3.4	-4.6	319.3	325.6	5.2	18.6	0.3	172.
2.0	14.9	951.3	900.0	27.3	1.5	18.6	4.9	-1.6	-4.7	310.4	324.3	4.8	18.7	0.6	196.
2.7	17.1	1198.7	875.0	24.5	-0.5	359.6	5.9	0.0	-5.9	309.8	322.2	4.2	19.1	0.8	173.
3.7	19.6	1451.2	850.0	22.0	-1.2	354.9	6.5	0.6	-6.5	309.8	321.9	4.1	21.1	1.2	188.
4.7	21.9	1708.8	825.0	19.5	-3.3	350.1	5.4	0.9	-5.3	309.7	320.5	3.6	21.2	1.5	184.
5.6	24.5	1972.1	800.0	17.0	-5.2	2.5	3.8	-0.2	-3.8	309.7	319.4	3.2	21.3	1.8	183.
6.6	26.9	2241.3	775.0	14.9	-6.2	316.5	2.0	1.3	-1.5	310.2	319.5	3.1	22.7	1.9	192.
7.7	29.4	2517.5	750.0	12.9	-6.3	226.5	3.5	2.5	2.4	311.0	320.6	3.2	25.7	1.9	179.
8.8	32.2	2801.1	725.0	10.7	-6.9	235.1	5.8	4.8	3.3	311.6	321.1	3.1	28.3	1.7	170.
10.0	34.9	3092.1	700.0	8.3	-8.8	237.9	9.8	8.3	5.2	312.0	320.5	2.8	28.7	1.6	151.
11.2	37.5	3391.4	675.0	6.1	-11.1	242.7	12.6	11.2	5.8	312.8	320.3	2.4	27.8	1.8	122.
12.3	40.4	3699.2	650.0	3.4	-12.1	247.5	14.0	12.9	5.4	313.1	320.3	2.3	31.1	2.4	134.
13.4	43.1	4015.7	625.0	1.1	-17.8	246.6	15.8	14.5	6.3	313.9	318.7	1.5	22.9	3.2	94.
14.4	46.2	4344.5	600.0	1.9	-24.6	238.5	17.8	15.2	9.3	318.4	321.3	0.9	11.8	4.0	97.
15.5	49.3	4686.7	575.0	0.0	-25.9	233.9	19.0	15.4	11.2	320.1	322.8	0.8	12.0	5.1	79.
16.6	52.3	5040.8	550.0	-2.6	-27.8	237.6	20.7	17.5	11.1	321.1	323.5	0.7	12.2	6.3	75.
17.8	55.4	5407.4	525.0	-5.9	-30.2	237.5	20.2	17.1	10.9	321.4	323.4	0.6	12.5	7.9	72.
19.1	58.6	5787.2	500.0	-8.9	-32.4	236.0	20.7	17.1	11.6	322.1	323.9	0.5	12.8	9.4	69.
20.5	62.1	6182.5	475.0	-11.4	-34.2	236.1	22.8	18.9	12.7	323.9	325.4	0.4	13.0	11.1	67.
21.7	65.6	6594.6	450.0	-14.8	-36.5	238.6	24.0	20.5	12.5	324.7	326.7	0.4	13.7	12.9	65.
23.1	69.3	7024.5	425.0	-18.0	-38.8	242.7	27.6	24.5	12.7	325.8	327.0	0.3	14.2	14.8	65.
24.4	72.8	7474.6	400.0	-21.6	-41.5	243.6	27.6	24.7	12.2	326.8	327.7	0.2	14.5	17.1	65.
26.0	76.8	7946.4	375.0	-25.5	-44.5	243.8	32.0	28.7	14.1	327.8	328.5	0.2	14.8	19.9	65.
27.8	80.9	8442.6	350.0	-29.6	-46.4	250.5	32.7	30.9	14.9	328.8	329.4	0.2	17.6	23.5	65.
30.0	85.1	8967.4	325.0	-33.5	-44.5	248.2	39.8	36.9	14.8	330.5	331.3	0.2	31.5	28.2	66.
32.5	89.4	9524.6	300.0	-37.5	-42.3	242.2	41.4	36.6	19.3	332.5	333.6	0.3	60.5	34.3	66.
34.9	94.4	10120.4	275.0	-41.4	99.9	236.8	46.3	38.7	25.4	335.3	999.9	99.9	999.9	40.6	65.
37.0	99.2	10760.8	250.0	-45.4	99.9	233.9	42.6	34.5	25.1	337.1	999.9	99.9	999.9	46.0	64.
39.0	104.3	11452.3	225.0	-51.8	99.9	238.7	50.0	42.7	26.0	339.1	999.9	99.9	999.9	51.8	63.
41.7	110.2	12207.3	200.0	-57.0	99.9	242.0	52.0	46.0	24.4	342.6	999.9	99.9	999.9	59.1	62.
44.2	116.0	13048.6	175.0	-58.7	99.9	243.1	52.6	46.9	23.8	353.1	999.9	99.9	999.9	67.0	62.
47.3	123.0	14017.0	150.0	-58.0	99.9	244.6	50.5*	45.7	21.7	370.2	999.9	99.9	999.9	75.3	63.
50.4	130.3	15151.9	125.0	-62.3	99.9	259.5	43.9*	43.2	8.0	382.2	999.9	99.9	999.9	83.0	64.
54.4	138.3	16515.0	100.0	-67.7	99.9	247.1	23.7*	21.8	9.2	397.0	999.9	99.9	999.9	90.2	65.
59.2	146.3	18210.2	75.0	-71.5	99.9	260.5	17.5	17.2	2.9	423.1	999.9	99.9	999.9	95.1	65.
66.8	156.0	20676.5	50.0	-60.2	99.9	233.3	3.7	2.9	2.2	501.6	999.9	99.9	999.9	94.7	64.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 265
MIDLAND, TEX

6 MAY 1975
2315 GMT

155 15. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.1	12.9	873.0	908.2	25.0	-3.4	240.0	5.7	4.9	2.9	306.9	316.6	3.3	15.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.3	13.6	952.4	900.0	23.3	8.7	232.9	9.4	7.5	5.7	306.6	328.8	7.9	39.3	0.3	30.
1.0	15.9	1196.7	875.0	20.3	4.8	231.6	8.2	6.4	5.1	305.7	323.2	6.2	36.2	7.6	41.
1.7	18.3	1445.7	850.0	17.8	2.8	226.2	7.6	5.5	5.2	305.6	321.3	5.5	36.7	0.8	44.
2.4	20.6	1699.9	825.0	15.4	1.0	219.7	6.9	4.4	5.3	305.6	319.9	5.0	37.5	1.2	44.
3.1	23.1	1959.7	800.0	13.0	-0.9	221.7	7.2	4.8	5.4	305.6	318.5	4.5	38.4	1.5	43.
3.8	25.5	2225.4	775.0	10.5	-2.5	232.0	9.7	7.6	6.0	305.7	317.6	4.1	40.0	1.8	43.
4.5	28.0	2497.0	750.0	7.9	-4.5	250.8	11.4	10.8	3.8	305.6	316.3	3.7	41.2	2.2	46.
5.2	30.7	2775.5	725.0	5.3	-6.0	263.3	11.4	11.3	1.3	305.7	315.6	3.4	43.9	2.6	52.
6.1	33.3	3060.9	700.0	2.7	-7.4	265.0	13.6	13.6	1.2	305.9	315.1	3.1	47.2	3.2	58.
7.0	36.3	3353.8	675.0	0.1	-9.0	268.2	15.3	15.3	0.5	306.1	314.6	2.9	50.2	3.9	64.
8.2	38.9	3654.8	650.0	-2.8	-11.1	262.7	19.4	19.3	2.5	306.1	313.6	2.5	52.9	5.1	70.
9.6	41.6	3966.5	625.0	-1.1	-16.5	251.0	23.5	22.1	7.6	311.4	316.7	1.7	29.9	7.0	72.
11.9	44.6	4291.6	600.0	-2.2	-16.6	241.3	22.6	19.7	10.9	313.7	319.2	1.7	32.2	10.0	69.
13.1	47.7	4628.8	575.0	-3.8	-17.7	237.1	24.0	20.1	13.0	315.7	321.0	1.7	33.0	11.7	68.
14.1	50.7	4977.9	550.0	-6.7	-20.3	236.0	24.7	20.7	13.5	316.3	320.7	1.4	33.0	13.1	67.
15.0	53.9	5338.7	525.0	-10.1	-23.3	238.2	25.3	21.5	13.3	316.4	320.0	1.1	33.0	14.4	66.
16.0	57.1	5712.3	500.0	-13.6	-26.4	239.8	25.0	21.6	12.6	316.5	319.4	0.9	33.0	16.0	65.
17.4	60.6	6100.2	475.0	-16.7	-29.0	240.0	28.2	24.4	14.1	317.4	319.8	0.7	33.2	18.1	64.
19.3	64.2	6504.5	450.0	-18.8	-30.7	243.0	27.8	24.8	12.6	319.7	321.9	0.7	33.8	21.3	64.
21.2	67.7	6928.6	425.0	-21.8	-33.4	244.6	30.6	27.7	13.2	321.1	322.9	0.5	33.8	24.6	64.
22.6	71.3	7371.4	400.0	-25.5	-37.1	243.0	30.5	27.2	13.8	321.7	323.0	0.4	32.9	27.3	64.
24.2	75.4	7836.2	375.0	-29.0	-40.1	242.9	33.3	29.6	15.2	323.2	324.3	0.3	32.9	30.1	64.
26.1	79.7	8326.7	350.0	-32.0	-42.9	241.7	40.0	35.3	19.0	325.5	326.4	0.2	32.9	34.2	64.
27.6	83.9	8846.4	325.0	-35.7	-46.6	239.5	44.7	38.5	22.7	327.4	328.1	0.2	31.2	38.6	63.
29.5	88.2	9398.1	300.0	-39.9	-49.9	238.0	47.6	40.4	25.2	329.1	999.9	99.9	999.9	43.8	63.
31.5	93.2	9986.2	275.0	-44.8	-54.8	239.3	47.7*	41.0	24.4	330.4	999.9	99.9	999.9	49.0	62.
33.3	98.0	10618.3	250.0	-48.3	-59.9	238.6	47.8*	40.8	24.9	334.2	999.9	99.9	999.9	54.6	62.
35.7	103.3	11304.6	225.0	-52.8	-64.8	236.8	46.4*	38.8	25.4	337.6	999.9	99.9	999.9	61.8	62.
38.5	109.3	12059.6	200.0	-55.3	-69.9	235.5	42.2*	34.7	23.9	345.2	999.9	99.9	999.9	69.1	61.
41.4	115.4	12913.7	175.0	-55.3	-74.9	240.9	28.5*	24.9	13.9	358.7	999.9	99.9	999.9	76.7	61.
44.6	122.3	13890.2	150.0	-58.3	-79.9	247.4	46.7*	43.2	18.0	369.7	999.9	99.9	999.9	85.0	61.
48.2	130.3	15029.1	125.0	-62.5	-84.9	255.5	43.2*	41.8	10.8	381.8	999.9	99.9	999.9	95.4	62.
53.1	137.8	16396.7	100.0	-64.4	-89.9	242.7	31.4*	27.9	14.4	403.3	999.9	99.9	999.9	105.3	63.
58.7	145.7	18144.6	75.0	-68.7	-94.9	272.6	41.1*	4.1	-0.2	428.8	999.9	99.9	999.9	111.7	63.
66.8	154.7	20645.1	50.0	-61.2	-99.9	13.1	5.7*	-1.3	-5.6	499.2	999.9	99.9	999.9	112.3	63.
80.0	162.7	25100.7	25.0	-49.5	-99.9	24.7	8.1	-3.4	-7.3	642.8	999.9	99.9	999.9	110.0	63.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

117

STATION NO. 270
FL PASC, TEX

6 MAY 1975
2315 GMT

124 56. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	16.2	1193.0	874.5	22.5	-10.6	240.0	6.2	5.4	3.1	307.5	313.4	1.9	10.0	0.0	J.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.9	18.5	1436.9	850.0	17.9	-6.8	245.6	4.4	4.0	1.8	305.2	313.3	2.7	18.0	0.6	60.
1.7	20.9	1690.5	825.0	14.9	-8.0	249.7	7.8	7.3	2.7	304.7	312.2	2.5	19.7	1.0	63.
2.7	23.1	1949.5	800.0	12.9	-9.6	245.7	10.0	9.2	4.1	305.2	312.1	2.3	19.8	1.5	65.
3.8	25.4	2214.8	775.0	10.3	-11.6	248.4	12.5	11.6	4.6	305.2	311.3	2.0	20.0	2.2	65.
4.6	27.6	2486.3	750.0	8.1	-11.6	256.4	13.6	13.5	3.3	305.6	311.9	2.1	23.2	2.9	67.
6.1	30.1	2764.5	725.0	5.5	-12.6	251.3	16.6	15.7	5.3	305.7	311.8	2.0	25.8	4.2	69.
7.3	32.7	3049.6	700.0	2.1	-14.3	250.5	18.8	17.7	6.3	305.0	310.5	1.8	28.5	5.5	69.
8.3	35.2	3341.9	675.0	-0.2	-15.8	248.7	21.5	20.0	7.8	305.6	310.7	1.6	29.5	6.7	70.
9.2	37.7	3642.4	650.0	-2.8	-17.0	248.6	22.2	20.7	8.1	305.9	310.7	1.5	32.4	7.9	69.
10.1	40.3	3951.9	625.0	-5.0	-22.0	251.9	23.3	22.2	7.2	306.8	310.1	1.1	25.1	9.3	69.
10.9	42.9	4271.2	600.0	-7.3	-26.0	254.7	26.1	25.2	6.9	307.8	310.2	0.8	20.6	10.2	70.
11.7	45.7	4601.7	575.0	-9.4	-30.0	255.7	28.7	27.8	7.1	309.1	310.9	0.5	16.8	11.6	70.
12.6	48.6	4943.6	550.0	-11.6	-31.7	257.9	28.3	27.7	5.9	310.3	312.0	0.5	16.9	13.1	71.
13.6	51.3	5298.8	525.0	-13.7	-33.4	262.1	27.1	26.8	3.7	312.0	313.4	0.4	17.1	14.9	72.
15.0	54.3	5668.2	500.0	-15.7	-35.3	258.0	30.4	29.7	6.3	313.9	315.2	0.4	16.7	17.2	73.
16.9	57.1	6053.5	475.0	-17.4	-37.2	253.1	28.5	27.3	8.3	316.4	317.5	0.3	15.8	20.6	74.
18.5	60.4	6459.1	450.0	-18.6	-38.2	244.0	31.5	28.3	13.8	319.8	320.9	0.3	15.9	23.3	73.
19.6	63.3	6881.1	425.0	-22.4	-41.1	239.2	33.0	28.4	16.9	320.3	321.2	0.2	16.2	25.5	72.
20.8	66.9	7323.0	400.0	-26.2	-44.1	238.6	33.0	28.2	17.2	320.9	321.5	0.2	16.5	27.9	71.
22.0	70.3	7786.3	375.0	-30.2	-46.5	238.0	31.0	26.3	16.4	321.5	322.1	0.2	18.4	29.9	70.
23.3	73.9	8272.8	350.0	-34.3	-48.4	242.2	35.5	31.4	16.5	322.4	322.9	0.1	22.3	32.8	69.
24.9	77.8	8786.4	325.0	-38.8	-52.1	244.6	36.8	33.2	15.8	323.1	323.4	0.1	22.8	36.1	69.
26.7	81.6	9329.5	300.0	-44.0	99.9	245.7	33.2	30.2	13.6	323.3	999.9	99.9	999.9	39.6	68.
28.7	85.7	9908.5	275.0	-47.9	99.9	245.0	40.2	36.4	17.0	325.9	999.9	99.9	999.9	44.1	68.
31.0	90.2	10533.3	250.0	-50.6	99.9	239.2	39.5	33.9	20.2	330.9	999.9	99.9	999.9	49.4	67.
32.9	94.8	11213.2	225.0	-54.7	99.9	241.7	57.0*	50.2	27.0	334.7	999.9	99.9	999.9	54.8	67.
35.7	99.9	11962.4	200.0	-56.4	99.9	237.9	54.2*	46.0	28.8	343.5	999.9	99.9	999.9	64.1	66.
38.6	105.0	12816.3	175.0	-54.8	99.9	238.3	51.4*	43.7	27.0	359.5	999.9	99.9	999.9	71.7	65.
42.1	110.8	13801.6	150.0	-54.8	99.9	245.3	24.1*	21.9	10.1	375.6	999.9	99.9	999.9	82.1	64.
45.9	117.3	14967.1	125.0	-55.6	99.9	240.3	21.7*	18.9	10.8	394.4	999.9	99.9	999.9	89.6	64.
50.4	124.8	16374.2	100.0	-60.5	99.9	249.8	20.3*	19.0	7.0	410.9	999.9	99.9	999.9	97.0	65.
55.7	132.7	18134.9	75.0	-66.7	99.9	233.1	4.0*	3.2	2.4	433.1	999.9	99.9	999.9	103.6	65.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 327
NASHVILLE, TENN

6 MAY 1975
2315 GMT

164 20. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.4	180.0	990.5	20.0	18.7	360.0	0.0	0.0	0.0	295.9	331.8	13.8	92.0	0.0	0.
99.9	99.9	99.9	1060.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.6	7.8	316.1	975.0	19.2	14.0	214.2	4.1	2.3	3.4	295.8	323.2	10.4	72.1	0.2	7.
1.6	10.0	540.4	950.0	19.9	12.8	216.8	8.0	4.8	6.4	298.7	325.2	9.9	63.8	0.5	24.
2.6	12.0	770.0	925.0	18.4	10.9	241.7	9.0	7.9	4.2	299.3	323.4	8.9	61.8	1.0	35.
3.5	14.3	1005.1	900.0	17.7	9.7	245.9	10.2	9.4	4.2	300.9	323.9	8.4	59.4	1.5	47.
4.5	16.4	1245.9	875.0	16.3	8.5	245.8	9.8	8.9	4.0	301.8	323.8	8.0	59.7	2.1	52.
5.4	18.7	1491.8	850.0	14.1	7.0	251.1	10.2	9.6	3.3	301.9	322.4	7.4	62.4	2.5	55.
6.4	20.9	1743.5	825.0	12.6	5.7	254.3	11.6	11.1	3.1	302.5	322.3	7.0	62.6	3.2	59.
7.4	23.2	2001.2	800.0	10.6	5.5	255.9	13.9	13.5	3.4	303.4	321.2	7.1	70.5	3.9	62.
8.4	25.5	2265.3	775.0	8.3	4.4	250.5	14.3	13.5	4.8	303.6	322.6	6.8	76.2	4.8	64.
9.4	27.9	2535.5	750.0	6.4	3.2	247.2	12.1	11.1	4.7	304.4	322.5	6.5	79.9	5.6	65.
10.3	30.5	2813.4	725.0	4.9	1.3	240.3	8.9	7.7	4.4	305.6	322.1	5.8	77.8	6.2	65.
11.4	33.1	3099.5	700.0	3.2	0.0	234.4	7.6	6.2	4.4	306.7	322.4	5.5	79.8	6.7	64.
12.5	35.6	3393.6	675.0	0.5	-0.9	234.6	7.0	5.7	4.0	306.9	322.1	5.3	90.2	7.2	63.
13.6	38.2	3696.0	650.0	-1.3	-1.3	233.3	6.4	5.1	3.8	308.1	321.5	5.4	121.3	7.6	63.
14.4	40.8	4008.3	625.0	-2.9	-2.9	239.5	7.6	6.5	3.8	309.7	324.2	4.9	101.1	7.9	62.
15.4	43.7	4331.6	600.0	-4.2	-4.2	249.9	7.8	7.3	2.7	311.9	325.9	4.7	107.9	8.4	63.
16.3	46.5	4666.7	575.0	-6.4	-6.4	263.1	6.5	6.5	0.8	313.0	325.4	4.1	100.6	8.8	63.
17.6	49.6	5012.7	550.0	-9.3	-9.3	283.5	6.5	6.4	-1.5	313.4	323.8	3.4	100.1	9.2	65.
19.0	52.5	5372.0	525.0	-10.8	-12.2	277.9	10.0	9.9	-1.4	315.7	324.6	2.9	89.8	9.8	67.
20.5	55.6	5745.9	500.0	-13.3	-14.7	279.8	11.5	11.3	-2.0	317.1	324.7	2.4	88.9	10.6	70.
22.0	58.7	6134.5	475.0	-16.1	-17.4	279.2	12.4	12.3	-2.0	318.3	324.8	2.1	89.5	11.5	73.
23.6	62.1	6539.9	450.0	-18.7	-20.1	273.8	10.7	10.7	-0.7	319.9	325.4	1.7	88.5	12.6	75.
25.2	65.5	6964.2	425.0	-21.3	-27.5	288.8	10.4	9.8	-3.3	321.7	324.9	0.9	57.2	13.4	76.
27.1	69.0	7408.8	400.0	-24.4	-31.6	302.5	11.1	9.4	-6.0	323.3	325.7	0.7	50.9	14.5	80.
29.1	72.6	7875.0	375.0	-28.9	-44.0	310.0	11.9	9.1	-7.7	323.3	324.0	0.2	21.4	15.4	83.
31.0	76.3	8365.1	350.0	-32.4	-38.2	298.5	12.9	11.4	-6.2	325.1	326.5	0.4	56.5	16.4	87.
33.0	80.6	8834.5	325.0	-35.9	-39.9	275.9	13.6	13.5	-1.4	327.1	328.4	0.4	66.4	18.0	88.
35.4	84.8	9435.1	300.0	-40.4	99.9	268.0	13.0	13.0	0.5	328.4	999.9	99.9	999.9	20.0	88.
38.1	89.2	10021.8	275.0	-45.4	99.9	270.8	16.7	16.7	-0.2	329.4	999.9	99.9	999.9	22.4	89.
41.0	94.0	10650.3	250.0	-50.3	99.9	285.3	17.3	16.7	-4.6	331.3	999.9	99.9	999.9	25.2	90.
43.7	99.0	11328.9	225.0	-56.5	99.9	297.9	18.2	16.1	-8.5	331.9	999.9	99.9	999.9	28.0	92.
46.8	104.3	12066.4	200.0	-62.6	99.9	290.1	22.0	20.7	-7.6	333.7	999.9	99.9	999.9	31.5	94.
50.6	110.3	12983.9	175.0	-65.6	99.9	285.7	27.0	26.0	-7.3	341.6	999.9	99.9	999.9	37.1	96.
54.8	116.5	13821.1	150.0	-65.7	99.9	287.3	33.8	32.3	-10.0	357.0	999.9	99.9	999.9	44.8	98.
59.6	124.0	14929.7	125.0	-65.3	99.9	288.5	24.7	23.4	-7.8	376.8	999.9	99.9	999.9	53.4	100.
65.8	132.3	16302.4	100.0	-60.7	99.9	306.2	20.2	16.3	-12.0	410.5	999.9	99.9	999.9	62.3	102.
73.1	141.7	18082.8	75.0	-63.2	99.9	317.4	9.6	6.5	-7.0	440.5	999.9	99.9	999.9	67.6	104.
83.9	153.0	20576.6	50.0	-63.0	99.9	101.3	4.4	-4.3	0.9	495.0	999.9	99.9	999.9	68.8	106.
102.7	166.5	24968.6	25.0	-54.2	99.9	296.5	1.4	1.3	-0.6	629.1	999.9	99.9	999.9	67.3	107.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 340
LITTLE ROCK, ARK

6 MAY 1975
2315 GMT

164 29. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.2	79.0	997.6	25.5	20.1	200.0	3.2	1.1	3.0	310.9	340.7	15.0	72.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.8	8.5	280.5	975.0	23.1	20.6	180.1	3.4	0.0	3.4	300.6	342.5	15.9	85.6	0.1	9.
1.7	10.8	507.2	950.0	21.4	19.3	190.1	6.7	1.2	6.6	300.9	340.8	15.1	88.0	0.4	6.
2.7	13.5	738.8	925.0	20.0	17.9	203.6	9.0	3.6	8.3	301.7	339.4	14.2	88.0	7.9	11.
3.5	15.8	975.4	900.0	18.6	17.8	220.2	9.1	5.9	6.9	302.6	341.1	14.4	95.1	1.3	19.
4.6	18.6	1217.9	875.0	17.7	16.4	237.4	7.7	6.5	4.2	304.0	340.7	13.6	92.1	1.8	27.
5.5	21.1	1466.0	850.0	16.2	15.0	237.3	6.8	5.7	3.7	304.8	339.4	12.7	92.4	2.1	33.
6.5	23.8	1720.1	825.0	14.3	13.4	232.7	8.4	6.7	5.1	305.3	337.7	11.9	94.5	2.6	37.
7.5	26.1	1980.1	800.0	12.5	11.7	217.4	7.4	4.5	5.9	305.9	335.8	10.9	94.6	3.0	39.
8.6	29.2	2246.4	775.0	10.4	7.4	203.6	8.1	3.3	7.4	306.1	329.5	8.4	81.5	3.5	37.
9.7	32.0	2519.0	750.0	8.9	3.5	206.8	8.5	3.8	7.5	307.1	325.7	6.6	68.9	4.1	35.
10.9	35.0	2800.1	725.0	9.4	-3.6	225.2	8.0	5.7	5.6	310.3	322.3	4.0	39.6	4.7	35.
12.1	37.8	3197.6	700.0	8.4	-29.6	242.4	7.7	6.8	3.6	311.8	313.5	0.5	5.0	5.2	37.
13.3	40.7	3389.5	675.0	6.2	-19.5	254.5	8.7	8.4	2.3	312.7	316.6	1.2	13.9	5.7	40.
14.6	43.8	3697.2	650.0	3.7	-21.7	268.0	10.8	10.8	0.4	313.3	316.7	1.0	13.5	6.3	45.
15.8	46.9	4014.1	625.0	1.3	-24.6	270.1	10.2	10.2	-0.0	314.0	316.7	0.8	12.4	6.9	49.
17.1	50.1	4340.5	600.0	-1.7	-25.4	267.4	11.9	11.9	0.5	314.2	316.9	0.8	14.4	7.5	53.
18.4	53.3	4677.2	575.0	-4.8	-26.2	268.1	13.1	13.1	0.4	314.4	317.0	0.8	16.7	8.3	57.
19.8	56.4	5024.7	550.0	-7.9	-28.7	265.9	15.2	15.2	1.1	314.7	316.9	0.6	16.9	9.4	61.
21.3	60.0	5384.6	525.0	-9.7	-33.5	265.5	17.5	17.5	1.4	316.7	318.2	0.4	12.2	17.7	64.
22.7	63.6	5760.6	500.0	-11.1	-46.7	257.0	17.7	17.3	4.0	319.5	319.9	0.1	3.4	12.2	66.
24.1	67.0	6152.3	475.0	-13.4	-43.8	253.1	19.2	18.4	5.6	321.3	321.9	0.2	5.7	13.7	67.
25.5	70.6	6562.3	450.0	-15.3	-54.2	247.3	18.2	16.8	7.0	323.9	324.1	0.1	2.2	15.4	67.
27.1	74.5	6990.9	425.0	-18.7	-57.3	252.7	17.4	16.6	5.2	324.9	325.7	0.0	1.8	17.7	68.
29.7	78.5	7440.2	400.0	-21.8	-57.8	268.1	20.9	20.9	0.7	326.6	326.8	0.0	2.2	18.7	69.
30.3	82.5	7912.2	375.0	-25.1	-58.6	270.7	30.0	30.0	-0.4	328.3	328.5	0.0	2.7	21.0	71.
32.3	86.7	8409.7	350.0	-29.0	-60.1	268.9	31.1	31.1	0.6	329.5	329.6	0.0	3.2	24.5	74.
34.0	91.2	8934.1	325.0	-33.9	-62.2	264.4	29.8	29.6	2.9	329.9	330.0	0.0	3.9	27.7	76.
36.2	95.9	9489.5	300.0	-38.1	-64.0	265.0	29.0	28.9	2.5	331.6	331.7	0.0	4.6	31.4	77.
38.5	100.8	10082.7	275.0	-42.6	-69.9	264.9	34.2	34.1	3.0	333.5	999.9	99.9	999.9	35.7	78.
40.5	105.8	10718.7	250.0	-47.4	-69.9	268.0	32.9	32.9	1.1	335.6	999.9	99.9	999.9	39.7	78.
43.1	111.3	11407.7	225.0	-52.3	-69.9	270.3	37.4	37.4	-0.2	338.4	999.9	99.9	999.9	44.8	80.
45.8	117.3	12160.4	200.0	-57.8	-69.9	273.5	42.0	41.9	-2.5	341.3	999.9	99.9	999.9	51.2	81.
49.6	123.8	12991.8	175.0	-62.4	-69.9	275.3	40.2	40.0	-3.7	346.9	999.9	99.9	999.9	57.9	83.
52.0	130.8	13938.2	150.0	-64.5	-69.9	272.6	35.7	35.7	-1.6	359.0	999.9	99.9	999.9	65.6	84.
55.9	138.0	15047.0	125.0	-64.9	-69.9	275.8	32.4	32.2	-3.3	377.4	999.9	99.9	999.9	74.4	85.
60.9	145.3	16411.6	100.0	-63.1	-69.9	280.8	25.7	25.3	-4.8	405.9	999.9	99.9	999.9	82.6	86.
66.9	153.3	18191.5	75.0	-62.1	-69.9	326.7	5.4	3.0	-4.5	442.8	999.9	99.9	999.9	86.7	86.
75.3	161.7	20655.8	50.0	-61.9	-69.9	28.9	7.3	-3.5	-6.4	497.8	999.9	99.9	999.9	87.4	89.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 349
MONETTE, MO

6 MAY 1975
2315 GMT

158 8. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	7.0	438.0	954.6	25.6	19.7	170.0	3.6	-0.6	3.5	344.8	346.2	15.4	70.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.1	7.4	480.6	950.0	24.4	18.8	999.9	99.9	99.9	99.9	344.0	343.1	14.6	70.8	999.9	999.
1.0	9.5	713.8	925.0	22.1	17.2	999.9	99.9	99.9	99.9	333.7	340.2	13.5	73.9	999.9	999.
2.0	11.3	551.9	900.0	20.0	16.5	210.0	13.6	6.8	11.8	303.9	339.6	13.2	80.1	1.3	13.
2.9	13.9	1194.9	875.0	18.7	14.3	999.9	99.9	99.9	99.9	304.8	336.9	11.8	75.4	999.9	999.
3.7	16.3	1444.0	850.0	18.5	9.5	999.9	99.9	99.9	99.9	306.8	331.4	8.8	55.6	999.9	999.
4.4	18.6	1699.9	825.0	17.4	6.9	999.9	99.9	99.9	99.9	308.0	329.4	7.6	50.1	999.9	999.
5.3	21.0	1961.8	800.0	15.9	0.2	999.9	99.9	99.9	99.9	308.8	322.9	4.9	34.2	999.9	999.
6.1	23.4	2230.5	775.0	13.9	-1.1	999.9	99.9	99.9	99.9	309.4	322.7	4.6	35.5	999.9	999.
7.1	25.9	2505.8	750.0	11.5	-4.0	999.9	99.9	99.9	99.9	309.6	320.8	3.8	33.3	999.9	999.
7.8	28.5	2787.9	725.0	8.8	-5.6	217.5	13.4	8.1	10.6	309.6	319.9	3.5	35.6	4.9	37.
8.7	31.2	3076.9	700.0	6.1	-6.3	214.3	12.7	7.1	10.5	309.6	319.4	3.3	39.1	5.6	37.
9.6	33.7	3373.8	675.0	3.8	-8.2	214.6	12.6	7.2	10.4	310.3	319.4	3.1	41.1	6.3	37.
10.7	36.4	3679.1	650.0	0.9	-8.4	216.4	12.3	7.3	9.9	310.4	319.8	3.1	49.9	7.1	37.
11.9	39.1	3992.6	625.0	-2.0	-9.6	214.7	13.7	7.8	11.2	310.6	319.4	2.9	55.6	8.0	36.
13.5	42.0	4316.5	600.0	-3.0	-10.5	222.6	15.8	10.7	11.7	313.0	321.8	2.9	56.1	9.5	37.
15.0	45.0	4652.5	575.0	-5.3	-11.7	231.6	15.6	12.2	9.7	314.1	322.4	2.7	50.4	10.8	38.
16.1	48.0	5000.5	550.0	-7.8	-12.5	236.1	15.9	13.2	8.9	315.1	323.3	2.7	68.8	11.8	39.
17.2	50.9	5360.9	525.0	-10.9	-11.9	243.8	14.9	13.4	8.6	315.7	324.7	2.9	91.8	12.9	41.
18.5	53.9	5734.5	500.0	-13.3	-14.1	247.4	16.3	15.1	6.3	317.1	325.1	2.6	94.0	13.9	43.
19.9	57.0	6123.5	475.0	-15.3	-27.9	257.2	19.1	18.6	4.2	319.1	321.8	0.8	32.8	15.3	46.
21.5	60.4	6530.0	450.0	-18.3	-32.6	260.2	17.7	17.4	3.0	320.3	322.2	0.5	26.9	16.8	49.
23.1	63.8	6954.2	425.0	-21.2	-35.4	256.4	19.9	19.4	4.7	321.8	323.3	0.4	26.4	18.3	52.
24.6	67.3	7399.7	400.0	-23.9	-37.5	250.6	17.1	16.1	5.7	323.9	325.2	0.4	26.9	20.0	54.
26.1	70.8	7867.5	375.0	-27.7	-31.8	240.2	13.6	11.8	6.8	325.0	327.4	0.7	67.8	21.2	55.
27.6	74.8	8360.5	350.0	-31.2	-36.0	238.2	21.1	17.9	11.1	326.7	328.5	0.5	62.0	22.7	55.
29.7	78.7	8882.3	325.0	-34.4	-46.6	239.8	26.7	23.1	13.4	329.2	329.9	0.2	27.8	25.9	55.
31.8	83.0	9437.3	300.0	-38.4	-52.2	245.5	30.3	27.6	12.5	331.2	331.6	0.1	21.4	29.3	56.
33.9	87.4	10030.7	275.0	-43.1	99.9	248.4	32.0	29.8	11.8	332.8	999.9	99.9	999.9	33.0	58.
36.1	92.3	10666.1	250.0	-48.2	99.9	246.2	35.8	32.8	14.4	334.5	999.9	99.9	999.9	37.6	59.
38.6	97.2	11352.7	225.0	-53.4	99.9	246.8	31.1	28.6	12.3	336.7	999.9	99.9	999.9	42.2	60.
41.4	102.4	12102.6	200.0	-58.1	99.9	241.3	33.9	29.8	16.3	340.7	999.9	99.9	999.9	47.8	62.
44.6	108.4	12936.7	175.0	-61.4	99.9	244.5	34.2	30.8	14.7	348.6	999.9	99.9	999.9	54.0	61.
47.8	114.7	13887.9	150.0	-63.3	99.9	253.7	33.3	32.0	9.4	361.0	999.9	99.9	999.9	60.7	61.
52.0	122.0	15011.4	125.0	-63.4	99.9	272.7	25.0	25.0	-1.2	380.1	999.9	99.9	999.9	66.7	64.
55.8	130.1	16397.3	100.0	-58.8	99.9	264.7	16.4	16.4	1.5	414.1	999.9	99.9	999.9	72.9	66.
62.3	138.3	18180.5	75.0	-62.0	99.9	302.0	8.8	7.4	-4.8	443.0	999.9	99.9	999.9	75.9	68.
70.8	147.7	20697.9	50.0	-59.5	99.9	324.0	3.4	2.0	-2.7	503.4	999.9	99.9	999.9	76.0	70.
83.8	157.5	25118.7	25.0	-52.6	99.9	40.3	1.3	-0.8	-1.0	633.6	999.9	99.9	999.9	75.5	70.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 353
OKLAHOMA CITY, OKLA

6 MAY 1975
2315 GMT

151 26. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIP DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.0	392.0	958.7	25.6	6.8	240.0	5.2	4.5	2.6	303.3	321.3	6.5	30.0	3.0	6.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	9.7	472.1	950.0	25.1	6.0	235.0	7.1	5.8	4.1	303.5	320.9	6.2	29.3	0.2	40.
1.3	11.7	704.9	925.0	22.8	4.0	230.4	7.9	6.1	5.1	303.4	319.0	5.5	29.4	0.6	53.
2.3	14.0	942.1	900.0	20.5	3.2	223.3	6.5	4.5	4.7	303.3	318.5	5.4	31.9	1.0	51.
3.2	16.1	1184.1	875.0	18.0	1.6	224.8	7.3	5.2	5.2	303.2	317.1	4.9	33.1	1.4	49.
4.3	18.4	1431.0	850.0	15.6	-0.5	218.9	8.9	5.6	6.9	303.1	315.5	4.3	33.1	1.9	47.
5.2	20.7	1693.1	825.0	13.5	-2.4	222.6	10.9	7.4	8.0	303.3	314.5	3.9	33.1	2.5	45.
6.2	23.0	1940.9	800.0	11.1	-4.5	229.7	12.3	9.4	8.0	303.4	313.3	3.4	33.1	3.1	45.
7.1	25.5	2205.0	775.0	9.4	-6.9	241.0	15.4	13.5	7.5	304.2	312.9	2.9	31.0	3.9	47.
8.0	27.9	2476.0	750.0	8.3	-8.8	241.3	19.4	17.0	9.3	306.0	313.8	2.6	28.6	4.8	50.
9.3	30.5	2755.5	725.0	7.0	-8.8	231.6	21.2	16.6	12.2	307.5	315.6	2.7	31.2	6.4	52.
10.6	33.2	3043.0	700.0	5.0	-9.7	216.8	19.8	11.9	15.9	308.4	316.3	2.6	33.6	8.0	51.
11.9	35.6	3338.9	675.0	3.0	-5.0	215.0	21.0	12.1	17.2	309.5	321.0	3.9	55.9	9.6	48.
13.3	38.2	3643.8	650.0	1.5	-12.3	216.5	21.6	12.8	17.3	310.9	317.9	2.3	34.9	11.2	46.
14.6	40.9	3957.9	625.0	-1.1	-19.7	217.8	24.7	15.1	19.5	311.3	315.4	1.3	22.9	13.0	45.
15.7	43.8	4282.4	600.0	-2.7	-22.6	219.2	28.2	17.8	21.9	313.1	316.4	1.0	19.8	14.8	44.
17.0	46.9	4618.5	575.0	-4.5	-24.1	221.5	27.8	18.5	20.8	314.8	317.9	0.9	19.9	17.1	43.
18.5	50.0	4966.9	550.0	-6.8	-25.9	225.1	27.4	19.4	19.4	316.1	318.9	0.8	20.0	19.5	43.
20.0	53.0	5328.5	525.0	-9.1	-27.8	228.5	26.6	19.9	17.6	317.5	320.0	0.7	20.2	21.9	44.
21.6	56.0	5703.5	500.0	-12.5	-30.6	232.8	24.6	19.6	14.9	317.7	319.8	0.6	20.4	24.4	45.
23.3	59.4	6093.0	475.0	-15.2	-32.8	231.7	25.3	19.9	15.7	319.2	320.9	0.5	20.5	26.9	45.
24.9	63.0	6499.8	450.0	-17.4	-34.6	230.6	22.7	17.5	14.4	321.3	322.9	0.4	20.7	29.1	46.
26.3	66.4	6925.0	425.0	-21.2	-37.7	233.2	23.9	19.1	14.3	321.8	323.0	0.3	20.9	31.1	46.
27.8	70.1	7365.6	400.0	-24.3	-40.2	234.9	21.6	17.7	12.4	323.4	324.4	0.3	21.1	33.2	47.
29.6	74.0	7836.0	375.0	-28.5	-43.8	232.7	19.2	15.3	11.6	323.8	324.5	0.2	21.3	35.1	47.
31.7	78.2	9327.1	350.0	-32.1	-46.7	235.9	26.5	21.9	14.8	325.4	326.0	0.2	21.6	37.7	48.
33.6	82.2	9846.5	325.0	-36.2	-50.2	239.2	32.7	28.1	16.7	326.7	327.1	0.1	21.8	41.3	48.
35.9	86.6	9397.6	300.0	-40.0	-49.9	234.2	37.4	30.3	21.9	328.9	999.9	99.9	999.9	46.2	49.
38.2	91.4	9985.9	275.0	-44.4	-49.9	235.9	39.3	32.5	22.0	330.9	999.9	99.9	999.9	51.3	50.
40.8	96.4	10618.2	250.0	-49.1	-49.9	243.0	38.3*	34.1	17.4	333.1	999.9	99.9	999.9	56.8	51.
43.5	101.5	11301.9	225.0	-53.8	-49.9	241.5	35.8*	31.5	17.1	336.1	999.9	99.9	999.9	63.4	52.
46.4	107.3	12053.3	200.0	-56.3	-49.9	999.9	99.9	99.9	99.9	343.6	999.9	99.9	999.9	999.9	99.9
49.9	113.5	12838.8	175.0	-59.2	-49.9	999.9	99.9	99.9	99.9	352.3	999.9	99.9	999.9	999.9	99.9
53.4	120.0	13806.3	150.0	-57.9	-49.9	999.9	99.9	99.9	99.9	370.4	999.9	99.9	999.9	999.9	99.9
57.9	127.3	15013.3	125.0	-60.1	-49.9	250.3	9.6*	9.1	3.2	386.3	999.9	99.9	999.9	92.8	55.
62.9	135.3	16399.9	100.0	-61.9	-49.9	240.2	23.2*	20.1	11.5	408.2	999.9	99.9	999.9	100.3	56.
69.5	143.0	18172.2	75.0	-62.0	-49.9	12.4	9.6*	-2.1	-9.4	442.9	999.9	99.9	999.9	107.4	57.
78.4	151.0	23687.7	50.0	-59.1	-49.9	226.9	13.0*	9.5	8.9	504.2	999.9	99.9	999.9	104.5	57.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	99.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

** BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 354
TINKER AFB. OKLA

7 MAY 1975
0 GMT

156 13. 0

TIME	CNTCT	HEIGHT	PRES	TEMP	DEW PT	DIR	SPEED	U COMP	V COMP	POT T	E POT T	MX RTO	RH	RANGE	AZ
MIN		GPM	MB	DEG C	DEG C	DEG	M/SEC	M/SEC	M/SEC	DEG K	DEG K	GM/KG	PCT	KM	DEG
0.0	8.2	393.0	959.2	25.7	5.8	220.0	3.0	1.0	2.3	303.3	320.3	6.1	28.0	0.7	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.3	9.5	477.8	950.0	25.6	4.7	44.2	8.5	-5.9	-6.1	304.0	319.9	5.6	25.9	0.3	223.
1.4	11.5	711.2	925.0	23.6	1.7	42.1	8.0	-5.4	-6.0	304.1	317.5	4.7	23.7	0.7	223.
2.4	12.6	949.1	900.0	21.3	-0.2	41.7	9.5	-6.3	-7.1	304.1	316.2	4.2	23.8	1.3	222.
3.4	15.6	1191.9	875.0	19.0	-1.2	43.3	10.0	-6.8	-7.3	304.1	315.6	4.0	25.3	1.8	223.
4.4	17.9	1435.4	850.0	16.6	-2.8	33.1	9.8	-5.4	-8.2	304.0	314.6	3.7	26.2	2.5	222.
5.4	20.1	1692.4	825.0	14.5	-4.6	38.6	9.5	-5.9	-7.4	304.3	314.0	3.3	26.3	3.7	220.
6.6	22.2	1951.1	800.0	12.0	-6.7	50.8	9.5	-7.4	-6.0	304.3	312.8	2.9	26.4	3.7	221.
7.7	24.6	2215.8	775.0	10.1	-8.3	64.7	12.8	-11.5	-5.5	305.0	312.8	2.6	26.4	4.4	223.
9.0	26.8	2487.7	750.0	8.9	-9.3	65.8	20.0	-18.2	-8.2	306.5	314.0	2.5	26.5	5.6	229.
10.9	29.2	2767.9	725.0	8.3	-10.0	48.3	22.5	-16.8	-14.9	308.9	316.4	2.5	26.2	8.2	232.
12.3	31.7	3056.6	700.0	6.1	-10.5	36.4	20.9	-12.4	-16.8	309.5	316.9	2.4	29.1	9.9	230.
13.4	34.3	3353.0	675.0	3.4	-8.0	36.2	20.5	-12.1	-16.6	309.8	319.1	3.1	43.4	11.3	228.
14.7	36.7	3658.0	650.0	1.1	-11.3	39.3	23.4	-14.8	-18.1	310.5	318.2	2.6	40.1	12.9	227.
15.9	39.4	3972.1	625.0	-1.3	-15.8	37.9	26.3	-10.1	-20.7	311.1	316.7	1.8	32.3	14.7	226.
17.0	41.9	4297.0	600.0	-1.9	-26.2	39.8	29.3	-18.8	-22.5	314.0	316.5	0.7	13.5	14.0	225.
18.3	44.8	4633.9	575.0	-4.2	-27.9	42.4	30.5	-20.6	-22.5	315.1	317.3	0.7	13.7	18.8	225.
19.6	47.7	4982.7	550.0	-6.3	-29.4	43.9	27.9	-19.3	-20.1	310.6	318.7	0.6	13.9	21.3	224.
21.2	50.6	5345.2	525.0	-8.5	-31.9	50.5	26.7	-20.6	-17.0	318.2	319.9	0.5	13.1	23.7	225.
23.0	53.6	5721.2	500.0	-11.7	-33.6	53.4	26.4	-20.3	-16.8	318.8	320.4	0.4	14.1	26.6	225.
24.9	56.6	6111.7	475.0	-15.0	-34.8	52.7	26.8	-21.3	-16.2	319.4	320.9	0.4	16.4	29.5	226.
26.5	59.9	6518.5	450.0	-17.3	-36.5	49.9	21.8	-16.7	-14.0	321.5	322.8	0.4	16.8	31.9	226.
28.2	63.3	6944.6	425.0	-20.5	-39.0	54.4	22.9	-18.6	-13.3	322.7	323.8	0.3	17.1	34.2	227.
29.9	66.7	7389.9	400.0	-24.3	-42.1	52.8	21.2	-16.9	-12.8	323.4	324.2	0.2	17.4	36.4	228.
31.8	70.3	7856.9	375.0	-28.1	-46.2	51.9	17.6	-13.8	-10.9	324.4	325.0	0.2	15.7	38.7	227.
33.6	73.9	8348.2	350.0	-31.8	-49.1	58.8	31.1	-26.6	-16.1	325.8	326.2	0.1	16.0	41.1	228.
35.5	77.8	8867.1	325.0	-36.2	-52.6	55.0	36.3	-29.7	-20.8	326.7	327.1	0.1	16.3	44.5	229.
37.9	82.0	9418.2	300.0	-40.1	99.9	53.0	37.8*	-30.2	-22.7	328.9	999.9	99.9	999.9	49.9	229.
40.1	86.2	10007.2	275.0	-44.4	99.9	55.8	37.6*	-31.1	-21.1	331.0	999.9	99.9	999.9	55.3	230.
42.5	91.0	10639.5	250.0	-48.9	99.9	58.1	42.3*	-35.9	-22.4	333.4	999.9	99.9	999.9	60.7	230.
45.2	96.0	11324.3	225.0	-53.2	99.9	53.4	42.2*	-33.9	-25.1	336.9	999.9	99.9	999.9	67.7	231.
47.9	101.3	12077.4	200.0	-55.6	99.9	54.8	44.7*	-36.5	-25.8	344.7	999.9	99.9	999.9	74.0	231.
50.8	107.3	12923.8	175.0	-58.4	99.9	61.0	43.6*	-38.2	-21.1	353.5	999.9	99.9	999.9	81.3	232.
54.3	113.6	13893.0	150.0	-58.3	99.9	59.1	40.6*	-34.8	-20.8	369.7	999.9	99.9	999.9	88.7	233.
58.0	121.0	15036.7	125.0	-61.0	99.9	58.2	32.0*	-27.2	-16.9	384.5	999.9	99.9	999.9	95.3	233.
62.6	129.5	16417.6	100.0	-62.2	99.9	67.8	23.6*	-21.8	-8.9	407.5	999.9	99.9	999.9	102.6	234.
68.2	138.5	18185.5	75.0	-62.7	99.9	206.7	6.1*	2.7	5.4	441.4	999.9	99.9	999.9	105.8	235.
76.1	148.0	20767.3	50.0	-57.2	99.9	235.4	15.8*	13.0	9.0	508.8	999.9	99.9	999.9	107.2	235.
88.7	158.0	25140.4	25.0	-52.1	99.9	235.6	2.8	2.4	1.6	634.8	999.9	99.9	999.9	102.8	236.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 363
AMARILLO, TEX

6 MAY 1975
2355 GMT

151 15. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.7	14.6	1095.0	881.9	19.4	-13.0	240.3	12.8	11.1	6.4	303.5	308.3	1.6	10.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	15.2	1162.4	875.0	18.3	-2.9	999.9	99.9	99.9	99.9	303.3	313.5	3.5	23.5	999.9	99.9
1.2	17.5	1409.2	850.0	15.7	-3.1	999.9	99.9	99.9	99.9	303.1	313.4	3.6	27.2	999.9	99.9
2.1	19.9	1661.1	825.0	12.8	-5.5	241.1	17.7	15.5	8.6	302.6	311.5	3.1	27.3	1.7	61.
2.7	22.1	1918.4	800.0	10.7	-7.3	242.5	16.9	15.0	7.8	302.9	311.0	2.8	27.3	2.4	61.
3.4	24.6	2181.6	775.0	8.4	-9.3	244.7	15.1	13.7	6.5	303.1	310.3	2.4	27.4	3.0	61.
4.0	27.3	2450.8	750.0	5.5	-10.9	247.1	16.8	15.5	6.5	302.8	309.4	2.2	29.5	3.6	62.
4.6	29.6	2726.7	725.0	2.8	-12.6	250.0	16.0	15.0	5.4	302.8	308.8	2.0	30.9	4.2	63.
5.4	32.3	3009.8	700.0	2.1	-15.3	247.3	19.8	18.2	7.6	305.0	310.1	1.7	26.3	5.0	64.
6.2	35.3	3304.1	675.0	2.6	-15.7	243.1	20.7	18.5	9.4	308.8	314.0	1.7	24.4	6.0	64.
7.0	37.4	3608.6	650.0	1.0	-17.1	242.2	21.3	18.9	9.9	310.2	315.1	1.5	24.5	7.1	64.
7.8	40.3	3922.1	625.0	-1.8	-19.4	244.0	22.3	20.1	9.8	310.5	314.7	1.3	24.6	8.0	64.
8.5	43.0	4245.2	600.0	-4.5	-21.6	244.8	22.4	20.2	9.5	311.0	314.7	1.1	24.7	9.1	64.
9.4	46.0	4578.6	575.0	-7.2	-23.9	242.7	23.1	20.5	10.6	311.7	314.8	1.0	24.8	10.3	64.
10.3	49.0	4923.2	550.0	-10.2	-26.5	239.8	24.1	20.8	12.1	312.0	314.6	0.8	24.9	11.5	64.
11.8	51.9	5279.9	525.0	-12.4	-28.3	238.6	25.1	21.4	13.1	313.5	315.8	0.7	25.0	13.8	63.
13.7	55.1	5650.8	500.0	-14.9	-30.4	237.7	26.2	22.2	14.0	314.9	316.9	0.6	25.1	16.6	62.
15.5	58.3	6038.1	475.0	-16.5	-31.5	234.1	27.9	22.6	16.4	317.6	319.5	0.6	26.0	19.6	61.
16.9	61.6	6442.2	450.0	-19.6	-34.0	233.6	29.0	23.3	17.2	318.6	320.2	0.5	26.5	21.9	60.
18.3	65.1	6863.9	425.0	-22.9	-36.8	238.5	29.1	24.8	15.2	319.7	321.0	0.4	26.5	24.4	60.
19.7	68.6	7306.2	400.0	-25.6	-38.8	240.6	34.1	29.7	16.7	321.7	322.8	0.3	27.7	27.0	60.
21.1	72.2	7770.5	375.0	-29.3	-41.3	236.2	31.8	26.4	17.7	322.8	323.7	0.3	30.0	29.9	60.
22.6	76.2	8258.8	350.0	-33.6	-44.5	234.3	30.0	24.4	17.5	323.4	324.1	0.2	32.2	32.4	59.
24.2	80.3	8775.4	325.0	-37.4	-47.7	234.9	38.3	31.4	22.1	325.1	325.7	0.2	32.7	36.1	59.
26.0	84.6	9322.0	300.0	-42.6	99.9	236.0	24.6	20.4	13.7	325.4	999.9	99.9	99.9	39.1	59.
29.1	89.0	9992.7	275.0	-47.4	99.9	239.7	42.4	36.3	22.1	326.6	999.9	99.9	99.9	44.5	58.
30.4	94.0	10527.1	250.0	-51.2	99.9	239.2	45.0	38.7	23.0	330.0	999.9	99.9	99.9	47.6	59.
32.5	99.0	11210.9	225.0	-52.4	99.9	233.9	31.9	25.8	18.8	338.2	999.9	99.9	99.9	53.8	58.
34.8	104.5	11968.7	200.0	-54.6	99.9	238.9	47.0*	40.2	24.2	346.3	999.9	99.9	99.9	57.6	58.
37.5	110.5	12820.8	175.0	-55.3	99.9	243.9	31.9*	28.6	14.0	358.6	999.9	99.9	99.9	65.8	59.
40.5	117.0	13808.1	150.0	-54.3	99.9	250.7	31.0*	29.3	10.2	376.5	999.9	99.9	99.9	71.1	59.
43.8	124.3	14974.2	125.0	-55.1	99.9	243.2	32.0*	28.6	14.4	395.3	999.9	99.9	99.9	77.4	60.
47.7	132.7	16384.5	100.0	-60.8	99.9	212.2	15.1*	8.1	12.8	410.2	999.9	99.9	99.9	80.5	59.
52.6	141.3	18169.9	75.0	-64.0	99.9	139.0	6.3	-4.1	4.8	438.8	999.9	99.9	99.9	85.2	59.
59.8	150.5	20696.7	50.0	-58.5	99.9	81.1	5.6	-5.5	-0.9	505.8	999.9	99.9	99.9	86.9	58.
70.4	160.0	25142.6	25.0	-50.6	99.9	283.0	4.4	4.3	-1.0	639.3	999.9	99.9	99.9	86.7	58.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 365
ALBUQUERQUE, N MEX

6 MAY 1975
2315 GMT

143 9. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	20.9	1615.0	829.7	16.1	-19.7	270.0	9.7	9.7	0.0	305.2	308.3	1.0	7.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.3	21.3	1666.7	825.0	12.1	-12.3	270.4	11.6	11.6	-0.1	301.6	307.3	1.8	16.8	0.2	171.
1.3	23.7	1923.1	800.0	9.8	-14.1	268.2	11.7	11.7	0.4	301.8	306.6	1.6	17.0	0.8	93.
2.5	25.9	2185.3	775.0	7.3	-16.0	266.4	14.5	14.5	0.9	301.8	306.1	1.4	17.1	1.7	89.
3.8	28.4	2453.7	750.0	4.7	-18.0	265.0	14.5	14.5	0.3	301.9	305.7	1.2	17.3	2.7	90.
4.8	30.9	2728.5	725.0	2.3	-19.9	267.3	14.8	14.8	0.7	302.1	305.5	1.1	17.5	3.7	89.
5.8	32.6	3010.3	700.0	-0.7	-19.8	265.6	18.0	18.0	1.4	301.9	305.4	1.1	21.7	4.6	89.
6.7	36.0	3299.2	675.0	-3.5	-20.2	260.9	16.0	15.8	2.5	301.9	305.1	1.1	25.9	5.6	88.
7.7	38.8	3596.1	650.0	-6.3	-22.6	256.3	17.1	16.6	4.1	302.0	305.0	1.0	26.0	6.6	86.
8.8	41.3	3901.1	625.0	-9.0	-23.9	255.0	17.2	16.6	4.4	302.2	305.0	0.9	28.7	7.7	85.
9.9	44.1	4215.4	600.0	-11.9	-24.5	253.6	17.9	17.1	5.0	302.5	305.2	0.9	33.9	8.8	83.
10.9	47.0	4539.4	575.0	-14.8	-25.1	248.8	19.5	18.1	7.0	302.7	305.4	0.9	41.1	10.0	82.
12.1	50.1	4874.0	550.0	-18.1	-26.0	244.1	22.4	20.1	9.8	302.7	305.3	0.8	49.9	11.4	80.
13.3	53.0	5219.9	525.0	-20.7	-26.7	243.9	26.4	23.7	11.6	303.6	305.7	0.7	48.4	13.0	78.
14.5	55.9	5576.1	500.0	-23.3	-32.6	251.7	31.0	29.5	9.7	304.7	306.3	0.5	41.6	15.1	76.
15.7	59.3	5952.9	475.0	-25.3	-36.3	257.4	34.8	33.9	7.6	306.7	307.9	0.4	34.6	17.5	76.
17.9	62.6	6345.3	450.0	-26.1	-42.2	250.4	41.0	38.6	13.7	310.5	311.2	0.2	20.0	22.4	76.
19.7	65.9	6739.0	425.0	-27.1	-44.9	250.0	45.5*	44.1	11.0	314.2	314.8	0.2	16.5	27.2	75.
21.6	69.4	7193.9	400.0	-29.2	-46.8	247.4	46.3*	42.8	17.8	317.0	317.5	0.1	16.3	32.2	75.
23.5	73.0	7652.8	375.0	-31.2	-48.3	242.5	49.0*	43.5	22.6	320.3	320.7	0.1	16.5	37.8	73.
25.2	77.0	8138.4	350.0	-34.6	-49.3	242.9	50.8*	45.2	23.1	322.0	322.4	0.1	20.6	42.5	72.
26.6	80.9	8651.7	325.0	-39.0	-53.0	244.5	52.8*	47.6	22.8	322.8	323.1	0.1	20.9	47.1	71.
28.4	85.0	9195.3	300.0	-43.5	99.9	240.1	45.2*	39.2	22.5	324.1	999.9	99.9	999.9	51.7	70.
30.7	89.3	9777.0	275.0	-46.6	99.9	241.4	40.6*	35.7	19.4	327.8	999.9	99.9	999.9	59.0	69.
33.1	94.2	10405.2	250.0	-49.0	99.9	241.5	59.0*	51.9	28.2	333.2	999.9	99.9	999.9	65.1	69.
35.3	99.0	11094.9	225.0	-50.8	99.9	226.6	23.6*	17.1	16.2	340.7	999.9	99.9	999.9	71.1	68.
38.0	104.3	11857.1	200.0	-53.0	99.9	235.6	41.6*	34.3	23.5	348.9	999.9	99.9	999.9	76.0	66.
41.0	110.2	12718.3	175.0	-52.4	99.9	237.6	23.2*	19.6	12.5	363.4	999.9	99.9	999.9	82.4	66.
45.5	116.3	13716.9	150.0	-52.0	99.9	245.5	34.6*	31.5	14.4	380.6	999.9	99.9	999.9	91.3	65.
48.9	123.5	14886.7	125.0	-56.7	99.9	241.6	24.5*	21.6	11.7	392.4	999.9	99.9	999.9	95.2	65.
53.8	131.0	16372.2	100.0	-58.2	99.9	243.2	31.1*	27.7	14.0	415.3	999.9	99.9	999.9	102.2	65.
59.6	139.3	18116.0	75.0	-59.2	99.9	250.0	5.0*	4.7	1.7	448.9	999.9	99.9	999.9	108.8	64.
67.8	147.7	21654.5	50.0	-58.5	99.9	210.0	2.6*	1.3	2.2	505.8	999.9	99.9	999.9	110.1	64.
80.4	156.5	25080.9	25.0	-50.2	99.9	41.0	6.1	-4.0	-4.6	640.7	999.9	99.9	999.9	108.1	64.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 433
SALEM, ILL

7 MAY 1975
29 GMT

116 149. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.8	175.0	990.0	16.6	14.6	140.0	3.2	-2.1	2.5	292.0	319.5	10.6	86.0	0.7	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.4	7.1	306.1	975.0	18.9	16.8	135.6	6.1	-4.3	4.3	295.8	324.4	12.5	87.8	0.2	315.
1.2	9.4	530.3	950.0	20.1	11.0	121.6	6.2	-5.3	3.3	298.8	322.3	8.7	55.5	0.4	312.
2.0	11.5	760.1	925.0	18.5	9.4	122.9	6.9	-5.8	3.8	299.3	321.2	8.1	55.6	0.7	306.
2.8	13.8	994.3	900.0	17.1	8.0	133.4	6.6	-4.8	4.5	300.2	320.7	7.5	54.8	1.1	307.
3.5	16.0	1234.0	875.0	15.0	6.7	147.0	2.3	-1.3	1.9	300.3	319.7	7.1	57.7	1.3	309.
4.4	18.5	1479.1	850.0	13.3	5.5	354.5	2.0	0.2	-2.0	301.0	319.5	6.7	59.1	1.3	308.
5.5	20.8	1730.4	825.0	12.2	4.7	334.2	7.1	3.1	-6.4	302.3	320.5	6.5	60.3	1.1	298.
6.5	23.3	1988.1	800.0	10.9	3.7	322.2	10.9	6.7	-8.6	303.6	321.2	6.3	60.9	0.6	274.
7.4	25.8	2252.4	775.0	9.1	2.7	319.3	13.9	9.1	-10.6	304.4	321.4	6.0	64.3	0.5	224.
8.4	28.3	2523.2	750.0	6.5	2.2	315.4	18.3	11.4	-11.6	304.5	321.4	6.0	73.6	1.3	160.
9.4	31.0	2800.4	725.0	3.6	0.4	307.8	18.4	14.5	-11.3	304.1	319.6	5.5	79.5	2.2	148.
10.5	33.7	3084.8	700.0	1.2	0.2	304.3	21.1	17.4	-11.9	304.6	320.3	5.6	92.6	3.5	139.
12.2	36.3	3377.0	675.0	-0.4	-0.9	308.7	18.9	14.7	-11.8	305.8	321.1	5.3	97.0	5.5	134.
13.6	39.2	3678.7	650.0	-1.6	-2.1	300.8	17.9	15.4	-9.2	307.8	322.4	5.1	96.7	7.0	133.
14.8	41.9	3990.9	625.0	-3.0	-3.5	297.0	22.1	21.2	-6.5	309.6	323.4	4.7	96.5	8.4	129.
16.6	44.9	4313.5	600.0	-5.0	-5.9	289.6	24.6	23.2	-8.3	310.4	999.9	99.9	999.9	10.8	124.
18.2	47.9	4646.6	575.0	-6.9	-6.9	279.7	20.6	20.3	-3.5	311.9	999.9	99.9	999.9	13.1	121.
19.8	50.8	4992.1	550.0	-8.8	-8.8	272.3	16.5	16.4	-0.7	313.7	999.9	99.9	999.9	14.6	118.
21.4	54.0	5351.5	525.0	-10.8	-11.8	268.5	14.1	14.1	0.4	315.8	324.9	2.9	92.1	15.9	116.
22.8	57.0	5725.9	500.0	-12.5	-13.6	271.3	15.1	15.1	-0.3	318.1	326.4	2.7	91.0	17.0	114.
24.2	60.4	6116.2	475.0	-15.0	-16.4	268.6	14.6	14.6	0.4	319.7	326.8	2.2	89.1	18.2	112.
25.6	63.9	6523.2	450.0	-17.8	-19.4	266.2	12.4	12.3	0.8	321.1	326.9	1.8	86.9	19.2	111.
27.0	67.3	6948.6	425.0	-21.0	-22.9	267.3	11.7	11.7	0.6	322.2	326.9	1.4	84.3	20.0	110.
28.5	70.8	7393.9	400.0	-24.2	-26.3	268.4	12.4	12.4	0.4	323.6	327.4	1.1	82.5	21.1	109.
30.2	74.6	7861.5	375.0	-27.6	-29.9	259.3	14.2	14.0	2.6	325.1	328.0	0.8	80.4	22.3	107.
32.2	78.7	8353.9	350.0	-31.6	-34.2	253.5	16.6	15.9	4.7	326.1	328.2	0.6	77.3	23.9	105.
34.0	82.7	8873.5	325.0	-36.0	-39.0	254.9	16.9	16.3	4.4	327.0	328.4	0.4	73.8	25.5	103.
36.0	86.8	9424.2	300.0	-40.4	-44.4	248.4	17.2	16.0	6.3	328.4	999.9	99.9	999.9	27.4	100.
39.4	91.6	10011.5	275.0	-45.2	-49.9	246.2	18.3	16.8	7.4	329.8	999.9	99.9	999.9	29.3	98.
40.9	96.4	10640.3	250.0	-50.6	-55.9	248.7	17.9	16.7	6.5	330.8	999.9	99.9	999.9	31.8	95.
43.6	101.3	11317.8	225.0	-56.3	-61.9	254.4	23.2	22.3	6.2	332.3	999.9	99.9	999.9	35.0	93.
46.4	107.0	12054.8	200.0	-62.0	-67.9	253.3	28.8	27.6	8.3	334.5	999.9	99.9	999.9	38.9	91.
49.3	113.0	12869.7	175.0	-66.2	-71.9	267.1	35.0	35.0	1.8	340.7	999.9	99.9	999.9	44.6	90.
52.8	119.5	13812.4	150.0	-62.1	-67.9	999.9	99.9	99.9	99.9	363.0	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 451
DCDGF CITY, KAN

6 MAY 1975
2315 GMT

157 16. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	13.8	791.0	912.0	22.8	-4.3	210.0	10.3	5.1	8.9	304.3	313.2	3.0	16.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.4	15.0	905.4	900.0	20.6	-4.4	223.0	14.6	9.9	10.6	303.2	312.1	3.1	18.1	0.4	36.
1.1	17.2	1146.9	875.0	17.4	-6.9	224.1	12.5	8.7	9.0	302.2	309.9	2.6	18.4	0.9	40.
1.8	19.8	1392.8	850.0	15.1	-8.6	223.9	12.5	8.7	9.0	302.3	309.2	2.3	18.6	1.4	42.
2.4	22.1	1644.1	825.0	12.3	-9.2	224.7	13.0	9.2	9.3	301.9	308.7	2.3	21.2	1.8	42.
3.3	24.7	1900.8	800.0	10.1	-11.0	220.8	14.1	9.2	10.7	302.2	308.3	2.1	21.3	2.6	43.
4.0	27.1	2163.3	775.0	7.5	-13.1	217.4	13.3	8.1	10.6	302.1	307.5	1.8	21.5	3.2	42.
5.0	29.8	2431.9	750.0	4.7	-14.2	218.1	14.9	9.2	11.7	301.9	307.0	1.7	23.9	4.0	41.
6.4	32.5	2706.6	725.0	1.8	-16.5	219.1	13.5	8.5	10.5	301.6	306.0	1.4	24.0	5.2	40.
7.6	35.2	2988.1	700.0	-0.9	-18.8	222.1	14.5	9.7	10.7	301.6	305.4	1.2	24.2	6.1	40.
8.6	37.9	3277.1	675.0	-3.4	-20.9	223.3	16.9	11.6	12.3	301.9	305.2	1.1	24.3	7.0	41.
9.4	40.7	3575.8	650.0	-1.6	-20.7	221.7	21.4	14.3	16.0	307.2	310.8	1.1	21.6	7.9	41.
10.4	43.6	3887.8	625.0	-2.2	-21.2	219.6	24.9	15.9	19.2	310.0	313.6	1.1	21.6	9.5	41.
11.4	46.6	4210.6	600.0	-4.6	-23.1	221.1	26.7	16.9	19.4	310.0	314.0	1.0	21.8	11.0	41.
12.5	49.9	4543.7	575.0	-7.4	-25.4	223.0	24.8	16.9	18.1	311.4	314.1	0.8	22.0	12.7	41.
13.7	52.8	4889.0	550.0	-9.3	-26.9	225.5	26.4	18.8	18.5	313.2	315.7	0.8	22.1	14.4	41.
15.0	56.0	5246.8	525.0	-12.0	-29.2	227.6	27.4	20.2	18.5	314.0	316.2	0.6	22.3	16.4	42.
16.1	59.3	5618.5	500.0	-14.6	-31.3	227.1	29.4	21.6	20.0	315.3	317.2	0.6	22.5	18.5	43.
17.4	62.9	6004.8	475.0	-17.8	-33.9	224.3	31.7	22.1	22.7	316.0	317.5	0.4	22.7	20.7	43.
18.5	66.2	6407.5	450.0	-20.1	-35.9	219.1	30.3	19.1	23.5	317.9	319.3	0.4	22.8	22.9	43.
19.8	70.0	6828.5	425.0	-23.2	-38.4	219.9	32.5	20.8	24.9	319.2	320.4	0.3	23.0	25.3	42.
21.1	73.7	7269.3	400.0	-26.4	-41.1	222.0	33.1	22.1	24.6	320.6	321.5	0.3	23.2	27.7	42.
22.6	77.7	7732.6	375.0	-29.7	-44.1	222.5	34.3	23.2	25.3	322.3	323.0	0.2	22.9	30.9	42.
24.1	81.7	8221.3	350.0	-33.2	-46.7	222.4	31.2	21.0	23.0	323.9	324.5	0.2	24.1	33.9	42.
25.8	85.9	8737.6	325.0	-37.5	-49.8	224.0	35.9	24.9	25.8	324.9	325.4	0.1	26.0	37.1	42.
27.8	90.4	9284.2	300.0	-42.7	99.9	224.7	28.2	19.8	20.0	325.2	999.9	99.9	999.9	40.9	43.
29.7	95.2	9865.8	275.0	-47.0	99.9	221.7	30.4	20.2	22.7	327.2	999.9	99.9	999.9	44.2	43.
31.3	100.2	10490.3	250.0	-51.7	99.9	221.4	35.1	23.2	26.2	329.2	999.9	99.9	999.9	47.8	43.
33.3	105.3	11168.7	225.0	-54.6	99.9	219.3	27.3	17.3	21.2	334.9	999.9	99.9	999.9	51.5	43.
35.9	111.0	11917.8	200.0	-56.0	99.9	216.8	24.2	14.5	19.3	344.1	999.9	99.9	999.9	56.0	42.
38.6	117.0	12769.1	175.0	-55.5	99.9	225.4	20.5	14.6	14.4	358.3	999.9	99.9	999.9	59.5	42.
41.8	123.8	13748.0	150.0	-57.2	99.9	233.1	21.4	17.1	12.8	371.5	999.9	99.9	999.9	63.4	43.
45.8	131.0	14901.5	125.0	-55.8	99.9	229.3	28.4	21.6	18.5	393.9	999.9	99.9	999.9	69.6	43.
50.5	138.7	16331.8	100.0	-57.2	99.9	255.3	11.0	10.6	2.8	417.2	999.9	99.9	999.9	73.6	44.
56.7	146.7	18126.2	75.0	-61.8	99.9	229.2	14.9	11.2	9.7	443.5	999.9	99.9	999.9	78.9	46.
64.9	155.7	20661.9	50.0	-58.9	99.9	21.2	3.5	-1.3	-3.3	504.9	999.9	99.9	999.9	79.8	46.
77.0	165.5	25078.6	25.0	-52.4	99.9	335.9	1.5	0.6	-1.3	634.2	999.9	99.9	999.9	77.8	46.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 456
TOPEKA, KAN.

6 MAY 1975
2315 GMT

160 220 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	7.0	268.0	970.2	28.9	16.8	180.0	7.7	0.0	7.7	306.4	340.7	12.5	48.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.6	8.7	454.7	950.0	27.3	7.5	202.9	12.9	5.0	11.9	305.2	325.2	6.9	28.7	0.4	23.
1.3	10.6	689.6	925.0	24.9	7.3	205.4	12.3	5.3	11.1	305.7	325.3	7.0	32.6	0.8	23.
2.0	12.8	528.7	900.0	22.6	6.3	207.1	12.6	5.7	11.2	305.7	324.6	6.7	34.9	1.4	25.
2.9	15.0	1172.7	875.0	20.2	5.9	204.9	11.7	4.9	10.6	305.7	324.6	6.7	39.3	2.1	25.
3.8	17.1	1421.8	850.0	17.8	5.0	205.7	11.2	4.8	10.1	305.6	323.9	6.5	42.9	2.7	25.
4.7	19.5	1676.3	825.0	15.8	1.4	204.8	12.2	5.1	11.1	306.0	320.8	5.2	37.6	3.3	25.
5.5	21.5	1936.5	800.0	14.0	-5.3	203.6	13.8	5.6	12.7	306.5	316.1	3.3	26.0	3.9	25.
6.3	24.0	2202.9	775.0	11.7	-3.4	206.8	14.1	6.4	12.6	306.9	318.1	3.8	34.6	4.6	25.
7.2	26.2	2476.5	750.0	10.5	-9.5	212.4	16.5	8.8	13.9	308.3	315.8	2.5	23.4	5.4	26.
8.1	28.8	2757.5	725.0	8.5	-12.5	217.9	16.0	9.8	12.7	309.0	315.2	2.0	21.0	6.4	27.
9.0	31.3	3046.2	700.0	6.2	-12.9	214.1	15.8	8.9	13.1	309.6	315.8	2.0	23.9	7.1	29.
9.9	34.0	3342.6	675.0	3.3	-15.3	211.6	16.4	8.6	14.0	309.5	314.9	1.7	24.1	8.0	29.
10.8	36.4	3647.3	650.0	0.9	-14.8	214.6	16.7	9.5	13.7	310.2	316.0	1.9	29.8	9.0	29.
11.9	39.2	3960.7	625.0	-2.1	-16.5	214.0	17.8	9.9	14.7	310.2	315.5	1.7	32.4	10.0	30.
12.9	41.9	4283.8	600.0	-4.3	-12.1	216.2	21.2	12.5	17.1	311.4	319.1	2.5	54.7	11.1	30.
14.0	44.8	4618.2	575.0	-6.7	-14.5	222.3	25.7	17.3	19.0	312.4	319.1	2.2	53.5	12.7	31.
15.2	47.8	4963.4	550.0	-9.9	-17.6	225.2	26.3	18.6	18.5	312.5	318.0	1.7	53.4	14.6	33.
16.3	50.6	5321.2	525.0	-11.7	-29.3	227.9	23.2	17.2	15.5	314.4	316.6	0.6	21.6	16.1	34.
17.6	53.3	5693.5	500.0	-13.6	-36.3	225.7	25.9	18.5	18.1	316.4	317.6	0.3	12.6	17.9	36.
18.9	56.9	6081.8	475.0	-15.6	-37.8	226.3	23.8	17.2	16.5	318.6	319.7	0.3	12.8	20.0	37.
20.7	60.1	6468.1	450.0	-17.6	-39.2	225.7	26.0	18.6	18.1	321.1	322.1	0.3	13.0	22.7	38.
22.4	63.7	6912.9	425.0	-21.4	-42.1	226.1	24.2	17.4	16.8	321.5	322.3	0.2	13.4	25.2	39.
24.1	67.2	7357.8	400.0	-23.9	-44.0	220.2	16.9	10.9	12.9	323.8	324.5	0.2	13.7	27.3	39.
25.8	70.8	7825.5	375.0	-27.6	-46.7	219.2	16.3	10.3	12.6	325.1	325.6	0.1	14.0	29.1	39.
27.7	74.7	8317.7	350.0	-31.5	-49.8	195.2	10.3	2.7	9.9	326.1	326.6	0.1	14.4	30.4	39.
29.8	79.0	8836.4	325.0	-36.7	-53.8	205.7	12.6	5.4	11.3	326.0	326.3	0.1	14.9	31.8	38.
32.0	83.0	9386.2	300.0	-40.9	99.9	218.2	10.2	6.3	8.0	327.7	999.9	99.9	999.9	33.4	37.
34.5	87.5	9974.3	275.0	-44.7	99.9	201.2	7.9	2.8	7.3	330.5	999.9	99.9	999.9	34.7	37.
36.9	92.4	10604.0	250.0	-50.2	99.9	219.8	6.6	4.2	5.1	331.4	999.9	99.9	999.9	35.8	37.
39.4	97.5	11283.1	225.0	-56.0	99.9	229.5	9.3	7.1	6.0	332.7	999.9	99.9	999.9	36.6	37.
42.2	103.0	12024.1	200.0	-60.5	99.9	219.3	18.6	11.8	14.4	337.0	999.9	99.9	999.9	38.9	38.
45.3	109.3	12955.3	175.0	-59.6	99.9	232.3	22.4	17.7	13.7	351.6	999.9	99.9	999.9	42.6	38.
49.1	116.0	13820.0	150.0	-60.0	99.9	222.6	17.2	11.7	12.7	366.8	999.9	99.9	999.9	46.9	40.
53.6	124.0	14957.5	125.0	-60.1	99.9	237.4	23.3	15.7	12.6	386.1	999.9	99.9	999.9	51.1	41.
58.8	132.7	16356.2	100.0	-57.0	99.9	252.7	18.1	17.3	5.4	417.6	999.9	99.9	999.9	57.7	44.
64.7	142.0	18165.2	75.0	-60.3	99.9	342.7	9.8	2.9	-9.4	446.5	999.9	99.9	999.9	59.6	47.
72.8	153.0	21693.2	50.0	-59.4	99.9	341.2	4.4	1.4	-4.2	503.4	999.9	99.9	999.9	59.2	49.
85.1	164.5	25106.7	25.0	-51.4	99.9	4.7	2.7	-0.2	-2.7	637.0	999.9	99.9	999.9	57.9	50.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 476
GRAND JUNCTION, COLO

6 MAY 1975
2315 GMT

143 13. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.1	15.5	1474.0	843.7	11.1	-6.7	250.0	9.3	8.7	3.2	258.8	306.7	2.7	28.0	1.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.5	21.1	1660.2	825.0	8.8	-8.3	255.5	10.9	10.6	2.7	298.2	315.4	2.5	28.9	0.3	79.
1.2	23.5	1913.3	800.0	5.4	-10.7	256.2	10.7	10.4	2.5	297.1	313.3	2.1	30.3	0.7	77.
2.3	25.8	2171.4	775.0	2.7	-11.5	258.8	9.9	9.7	1.9	297.0	312.9	2.0	34.0	1.4	76.
3.3	28.1	2435.4	750.0	0.2	-12.2	268.6	9.7	9.7	0.2	297.0	302.8	2.0	38.6	2.0	79.
4.3	30.7	2705.8	725.0	-2.6	-13.0	276.2	8.0	8.0	-0.9	296.9	302.5	1.9	44.5	2.5	82.
5.6	33.2	2982.9	700.0	-5.3	-13.9	277.0	10.3	10.2	-1.3	296.9	302.3	1.9	50.4	3.2	85.
6.9	35.7	3267.2	675.0	-7.9	-14.8	282.9	9.1	8.9	-2.0	297.0	302.3	1.8	57.4	3.9	87.
8.0	38.3	3559.3	650.0	-10.4	-18.2	279.5	9.0	8.9	-1.5	297.4	301.5	1.4	52.5	4.5	90.
9.1	40.9	3859.8	625.0	-12.9	-22.7	265.6	7.2	7.2	0.6	297.8	300.8	1.0	43.4	5.0	91.
10.0	43.7	4164.4	600.0	-15.9	-31.7	247.7	5.9	5.5	2.2	297.7	299.2	0.5	25.8	5.4	89.
11.1	46.6	4488.3	575.0	-18.8	-34.7	235.6	7.1	5.8	4.0	298.0	299.1	0.3	22.9	5.7	87.
12.1	49.6	4817.7	550.0	-21.6	-37.1	234.2	8.2	6.7	4.8	298.4	299.4	0.3	23.1	6.1	85.
13.2	52.4	5158.5	525.0	-24.3	-39.3	242.9	7.7	6.9	3.5	299.2	300.0	0.2	23.2	6.6	82.
14.3	55.3	5512.4	500.0	-27.1	-35.7	268.0	4.8	4.8	0.2	300.0	301.2	0.4	43.6	7.1	82.
15.5	58.4	5940.1	475.0	-30.1	-41.5	318.3	3.3	2.2	-2.4	300.7	301.4	0.2	31.5	7.2	83.
16.5	61.8	6262.6	450.0	-33.4	-44.5	302.3	1.9	1.6	-1.0	301.2	301.8	0.2	31.5	7.3	84.
17.8	65.2	6661.6	425.0	-36.3	-44.2	240.2	0.4	0.3	0.2	302.4	303.0	0.2	43.9	7.4	84.
19.2	68.6	7080.9	400.0	-38.2	-44.7	30.1	5.7	-2.9	-5.0	305.4	306.0	0.2	49.7	7.4	85.
20.8	72.1	7524.3	375.0	-39.0	-44.3	38.1	13.3	-8.2	-10.4	309.9	310.6	0.2	56.4	6.8	91.
22.2	75.9	7994.1	350.0	-42.0	99.9	30.0	16.8	-8.4	-14.6	312.1	999.9	99.9	999.9	6.1	101.
23.8	80.0	8492.0	325.0	-44.8	99.9	21.2	12.6	-4.6	-11.8	314.9	999.9	99.9	999.9	6.0	117.
25.5	84.0	9025.5	300.0	-45.1	99.9	264.7	4.2	4.2	0.4	321.8	999.9	99.9	999.9	6.2	121.
27.2	88.2	9610.9	275.0	-42.9	99.9	260.7	12.9	12.8	2.1	333.1	999.9	99.9	999.9	7.0	115.
29.2	93.0	10257.8	250.0	-41.1	99.9	246.1	15.7	14.4	6.4	344.5	999.9	99.9	999.9	8.3	109.
31.4	97.8	10972.6	225.0	-41.6	99.9	248.7	17.8	16.6	6.5	354.7	999.9	99.9	999.9	10.3	99.
33.9	103.2	11766.6	200.0	-44.8	99.9	236.6	18.7	15.6	10.3	361.8	999.9	99.9	999.9	12.3	92.
36.5	109.0	12655.3	175.0	-47.1	99.9	232.1	15.8	12.5	5.7	372.1	999.9	99.9	999.9	14.7	85.
39.6	115.2	13664.4	150.0	-51.3	99.9	231.7	15.1	11.9	9.4	381.8	999.9	99.9	999.9	17.5	80.
43.1	122.3	14843.2	125.0	-52.3	99.9	247.6	10.8	9.9	4.1	400.3	999.9	99.9	999.9	20.2	77.
47.2	130.0	16277.6	100.0	-52.7	99.9	221.3	13.9	9.1	10.4	425.5	999.9	99.9	999.9	22.7	73.
51.2	138.3	18140.2	75.0	-53.6	99.9	201.9	10.5	3.9	9.8	460.6	999.9	99.9	999.9	24.4	69.
56.4	147.3	20716.9	50.0	-55.5	99.9	248.4	4.7	4.3	1.7	512.8	999.9	99.9	999.9	25.9	64.
66.8	157.0	25123.7	25.0	-53.3	99.9	192.3	2.4	0.5	2.4	631.4	999.9	99.9	999.9	26.2	65.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 11001
MARSHALL SPACE FLIGHT CENTER

6 MAY 1975
2332 GMT

164 17. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCWF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	6.3	180.0	991.2	21.8	18.2	140.0	2.1	-1.3	1.6	297.5	332.7	13.4	80.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	7.8	324.1	975.0	22.7	18.6	145.6	5.6	-3.1	4.6	299.9	337.0	14.0	77.7	5.2	323.
1.5	10.0	549.0	950.0	18.6	14.5	150.1	4.7	-2.4	4.1	297.5	326.6	11.0	76.8	0.4	323.
2.4	12.0	777.9	925.0	17.2	13.4	159.5	4.8	-1.7	4.5	298.3	326.4	10.6	78.8	0.7	327.
3.4	14.5	1011.8	900.0	16.0	13.0	197.2	7.6	2.3	7.3	299.4	327.5	10.5	82.3	1.0	340.
4.3	16.6	1251.3	875.0	15.2	8.8	208.9	8.2	4.0	7.2	300.6	322.9	8.2	65.8	1.3	352.
5.2	19.1	1457.1	850.0	14.8	6.6	212.9	8.7	4.8	7.3	302.6	322.5	7.2	57.8	1.7	3.
6.2	21.2	1748.8	825.0	12.4	5.1	211.0	10.3	5.3	8.8	302.6	321.2	6.7	60.7	2.2	19.
7.2	23.7	2006.7	800.0	10.8	3.9	216.1	11.1	6.5	9.0	303.5	321.3	6.4	62.5	2.8	15.
8.3	26.3	2270.0	775.0	7.8	2.8	220.9	12.2	8.0	9.2	302.9	319.9	6.1	70.7	3.6	29.
9.6	28.7	2539.8	750.0	5.2	2.5	226.6	12.8	9.3	8.8	303.7	320.3	6.1	82.7	4.5	25.
10.8	31.2	2815.9	725.0	2.6	1.4	223.7	13.5	9.3	9.8	303.1	319.6	5.9	91.7	5.4	29.
11.9	33.9	3099.1	700.0	0.5	-0.2	218.0	11.7	7.2	9.2	303.7	319.0	5.4	94.9	6.2	31.
13.0	36.3	3391.0	675.0	-0.8	-1.7	209.4	9.2	4.5	8.1	305.4	319.8	5.0	94.1	6.9	31.
14.2	39.1	3692.1	650.0	-2.3	-3.4	200.8	7.2	2.6	6.7	306.9	320.3	4.6	92.3	7.5	30.
15.4	42.0	4002.5	625.0	-4.7	-5.5	201.5	8.0	2.9	7.4	307.5	319.4	4.1	94.1	8.0	30.
16.4	44.8	4323.4	600.0	-6.3	-8.2	211.4	8.0	4.2	6.8	309.3	319.5	3.4	85.9	8.5	29.
17.8	47.8	4656.0	575.0	-7.7	-18.0	246.3	10.2	9.3	4.1	311.1	316.2	1.6	43.4	9.2	31.
19.1	50.7	5001.0	550.0	-8.7	-22.1	276.4	11.7	11.6	-1.3	313.9	317.7	1.2	32.9	9.7	34.
20.4	53.9	5360.5	525.0	-10.1	-53.0	293.1	10.6	9.7	-4.1	316.3	316.6	0.1	3.0	10.1	40.
21.8	57.0	5735.5	500.0	-11.6	-57.3	295.5	12.4	11.2	-5.3	318.9	319.0	0.0	1.0	10.3	45.
23.2	60.3	6126.3	475.0	-14.4	-59.1	293.2	14.4	13.3	-5.7	320.0	320.2	0.0	1.0	10.8	51.
24.6	63.9	6533.4	450.0	-17.7	-61.2	289.5	15.3	14.4	-5.1	321.0	321.0	0.0	1.0	11.4	56.
26.1	67.2	6958.6	425.0	-20.6	-63.0	290.1	14.4	13.6	-5.0	322.5	322.6	0.0	1.0	12.3	61.
27.7	70.9	7403.5	400.0	-24.5	-65.6	290.8	15.6	14.6	-5.5	323.0	323.1	0.0	1.0	13.3	66.
29.5	74.8	7870.1	375.0	-28.0	-67.0	295.7	16.5	14.8	-7.1	324.4	324.5	0.0	1.2	14.5	71.
31.2	79.0	8361.5	350.0	-32.2	-52.3	297.0	14.5	12.9	-6.6	325.3	325.6	0.1	11.3	15.6	75.
33.1	83.2	8878.7	325.0	-37.4	-42.6	291.4	14.1	13.2	-5.2	325.0	326.0	0.3	57.9	16.9	78.
35.0	87.4	9427.1	300.0	-41.4	99.9	289.2	15.1	14.3	-5.0	327.0	999.9	99.9	999.9	18.3	81.
37.0	92.4	10011.0	275.0	-46.7	99.9	285.5	16.0	15.4	-4.3	327.6	999.9	99.9	999.9	19.9	83.
39.1	97.3	11635.6	250.0	-51.8	99.9	290.4	23.5	22.0	-8.2	329.1	999.9	99.9	999.9	22.5	80.
41.6	102.6	11310.7	225.0	-57.0	99.9	289.5	27.4	25.9	-9.2	331.1	999.9	99.9	999.9	25.9	90.
44.2	108.5	12045.8	200.0	-62.8	99.9	291.0	25.1	23.4	-9.0	333.4	999.9	99.9	999.9	29.7	93.
47.2	115.0	12859.9	175.0	-66.4	99.9	291.1	33.1	30.9	-11.9	340.4	999.9	99.9	999.9	34.6	95.
50.3	122.0	13797.3	150.0	-66.2	99.9	299.9	43.3	37.5	-21.6	356.1	999.9	99.9	999.9	41.8	96.
54.1	130.7	14897.7	125.0	-67.0	99.9	293.1	32.8	30.2	-12.9	373.6	999.9	99.9	999.9	49.3	100.
58.7	138.0	16247.6	100.0	-65.4	99.9	295.3	24.8	22.4	-10.6	401.5	999.9	99.9	999.9	56.3	102.
64.6	146.7	17999.3	75.0	-65.5	99.9	336.4	5.4	2.2	-4.9	435.6	999.9	99.9	999.9	61.2	105.
73.0	156.3	20484.2	50.0	-62.7	99.9	350.9	2.4	0.4	-2.3	495.8	999.9	99.9	999.9	62.1	106.
86.2	166.0	24858.8	25.0	-53.0	99.9	264.3	2.9	2.9	0.3	632.4	999.9	99.9	999.9	60.8	107.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 22002
FT. SILL, OKLA

6 MAY 1975
2305 GMT

156 24. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.2	8.9	362.0	962.0	27.5	1.1	240.0	4.1	3.6	2.1	304.6	317.0	4.3	18.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.4	9.9	472.6	950.0	26.4	1.3	247.4	7.1	6.5	2.7	304.6	317.3	4.4	19.6	0.2	55.
1.5	12.0	706.0	925.0	23.8	-0.7	240.0	8.1	7.0	4.1	304.2	315.5	3.9	19.7	0.7	62.
2.5	14.4	944.0	900.0	21.4	-1.6	228.7	8.3	6.2	5.5	304.1	315.1	3.8	21.4	1.1	58.
3.8	16.5	1186.6	875.0	19.1	-3.4	229.1	9.7	7.3	6.4	304.1	314.0	3.4	21.5	1.8	54.
4.9	18.9	1434.1	850.0	16.6	-4.1	231.1	8.9	6.9	5.6	304.0	313.7	3.3	23.8	2.5	53.
6.1	21.1	1686.9	825.0	14.2	-5.5	235.1	11.1	9.1	6.4	304.0	313.0	3.1	25.0	3.2	52.
7.3	23.7	1945.4	800.0	12.1	-7.3	243.5	12.7	11.4	5.7	304.4	312.6	2.8	25.1	4.0	54.
8.4	25.9	2210.0	775.0	9.7	-9.3	248.8	15.2	14.2	5.5	304.6	311.9	2.4	25.1	4.9	57.
9.7	28.6	2481.3	750.0	8.2	-9.6	243.3	18.1	16.1	8.1	305.8	313.1	2.5	27.1	6.1	59.
11.0	31.2	2760.9	725.0	7.5	-9.9	233.4	20.5	16.5	12.2	308.0	315.5	2.5	27.7	7.7	59.
12.3	34.0	3048.6	700.0	5.4	-11.4	224.1	21.4	14.9	15.4	308.7	315.7	2.3	28.6	9.3	57.
13.5	36.4	3344.8	675.0	3.6	-13.0	216.0	21.2	12.5	17.2	309.9	316.3	2.1	28.5	10.8	55.
14.6	39.3	3649.8	650.0	0.9	-16.4	215.2	22.1	12.7	18.1	310.2	315.3	1.6	26.0	12.1	52.
15.7	42.0	3963.4	625.0	-1.0	-23.5	216.3	25.7	15.2	20.7	311.4	314.4	0.9	16.1	13.6	50.
16.8	45.0	4288.6	600.0	-1.9	-27.1	219.1	28.7	18.1	22.3	313.9	316.2	0.7	12.4	15.4	49.
18.0	48.0	4625.1	575.0	-4.2	-27.9	222.0	27.1	18.2	20.1	315.1	317.3	0.7	13.7	17.5	48.
19.5	51.0	4973.8	550.0	-6.4	-30.3	223.4	26.8	18.4	19.5	316.6	318.5	0.6	12.8	20.0	47.
21.0	54.3	5335.9	525.0	-9.0	-31.9	231.7	26.2	20.5	16.2	317.6	319.3	0.5	13.6	22.3	47.
22.5	57.4	5711.3	500.0	-12.1	-34.2	235.4	25.2	20.7	14.3	318.3	319.8	0.4	13.8	24.5	48.
24.0	61.0	6100.7	475.0	-15.5	-34.8	234.4	25.0	20.3	14.6	318.8	320.2	0.4	17.2	26.9	49.
25.7	64.6	6506.0	450.0	-19.2	-36.7	235.0	25.5	20.9	14.6	319.1	320.4	0.4	19.3	29.4	49.
27.5	68.1	6929.6	425.0	-21.5	-39.5	234.8	23.7	19.4	13.7	321.4	322.5	0.3	17.6	31.9	49.
29.2	71.7	7373.7	400.0	-24.8	-42.2	237.0	24.9	20.9	13.6	322.7	323.5	0.2	17.9	34.5	50.
30.9	75.9	7840.3	375.0	-27.8	-45.9	239.0	29.6	25.4	15.2	324.8	325.4	0.2	15.6	37.2	51.
32.6	80.0	8332.5	350.0	-31.3	-49.3	236.7	35.3	30.5	17.8	326.4	326.9	0.1	14.9	40.3	51.
34.4	84.2	8853.3	325.0	-35.4	-52.8	237.1	39.3	33.0	21.3	327.8	328.2	0.1	14.7	44.6	52.
36.2	88.6	9405.4	300.0	-39.9	99.9	238.7	39.2	33.5	20.4	329.1	999.9	99.9	999.9	48.7	53.
38.2	93.5	9993.6	275.0	-44.6	99.9	240.5	40.8*	35.5	20.1	330.6	999.9	99.9	999.9	53.8	53.
40.3	98.5	10625.4	250.0	-49.2	99.9	241.2	49.2*	43.1	23.7	333.0	999.9	99.9	999.9	58.7	54.
42.6	104.0	11309.3	225.0	-53.4	99.9	239.1	30.3*	26.0	15.5	336.7	999.9	99.9	999.9	64.1	55.
45.1	110.0	12060.5	200.0	-56.3	99.9	239.4	45.1*	38.8	23.0	343.6	999.9	99.9	999.9	69.9	55.
47.8	116.0	12963.3	175.0	-58.9	99.9	245.1	33.5*	30.3	14.1	352.7	999.9	99.9	999.9	76.3	55.
50.7	123.0	13863.6	150.0	-60.9	99.9	245.9	32.5*	29.7	13.3	365.2	999.9	99.9	999.9	81.7	56.
54.2	130.3	15000.4	125.0	-60.1	99.9	249.8	31.6*	29.7	10.9	386.2	999.9	99.9	999.9	89.3	57.
58.2	138.0	16392.2	100.0	-61.6	99.9	246.5	34.7*	31.8	13.8	408.6	999.9	99.9	999.9	97.2	58.
63.0	145.7	18150.0	75.0	-65.4	99.9	263.9	10.0*	9.9	1.1	435.8	999.9	99.9	999.9	104.2	59.
69.5	154.0	20648.4	50.0	-63.0	99.9	78.9	8.4	-8.2	-1.6	495.1	999.9	99.9	999.9	101.7	58.
80.6	162.7	25082.1	25.0	-50.4	99.9	999.9	99.9	99.9	99.9	640.2	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

134

Sounding Data

7 May 1975

0300 GMT

131 - 152
~~152~~ - 153

131

STATION NO. 232
BOOTHVILLE, LA

7 MAY 1975
215 GMT

159 17. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MH	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.3	1.0	1010.7	23.9	23.0	140.0	4.2	-2.7	3.2	298.6	345.1	17.9	95.0	0.0	0.
0.1	6.2	94.7	1000.0	23.7	23.4	168.2	11.1	-2.3	10.8	299.3	347.4	18.4	98.0	0.4	335.
0.7	8.5	317.0	975.0	23.1	22.7	169.1	11.2	-2.1	11.0	300.8	348.5	18.2	97.9	0.5	339.
1.5	10.7	544.1	950.0	21.3	20.8	172.2	12.6	-1.7	12.5	301.0	344.7	16.6	97.2	1.1	345.
2.3	13.0	775.6	925.0	20.2	16.6	173.0	12.6	-1.5	12.6	301.7	336.4	13.0	79.5	1.7	348.
3.1	15.3	1012.6	900.0	20.1	12.2	173.8	9.6	-1.0	9.0	303.6	331.2	10.1	61.1	2.2	349.
3.9	17.5	1256.1	875.0	20.1	10.2	193.6	5.9	1.4	5.7	305.9	331.0	9.1	53.4	2.5	350.
4.7	20.2	1505.9	850.0	18.8	9.0	209.7	6.7	3.3	5.8	307.0	330.8	8.5	52.8	2.8	354.
5.5	22.4	1761.7	825.0	16.7	9.6	216.2	6.2	3.7	5.0	307.4	333.0	9.2	63.3	3.0	358.
6.4	25.0	2023.1	800.0	13.9	10.8	209.7	5.6	2.8	4.9	307.4	335.9	10.3	81.5	3.2	1.
7.2	27.4	2291.1	775.0	13.8	-5.9	215.8	6.4	3.8	5.2	309.1	318.6	3.2	25.2	3.5	3.
8.1	30.1	2567.2	750.0	13.1	-4.0	234.2	5.9	4.8	3.5	311.3	322.6	3.8	30.1	3.8	7.
9.0	32.8	2851.2	725.0	11.3	-14.2	254.2	5.1	4.9	1.4	312.1	317.8	1.9	16.0	4.0	10.
10.0	35.5	3143.1	700.0	9.6	-27.4	268.8	5.6	5.6	0.1	313.1	315.1	0.6	5.4	4.1	14.
10.8	38.1	3443.4	675.0	8.0	-27.3	278.7	6.7	6.7	-1.0	314.6	316.7	0.6	6.2	4.1	18.
11.8	40.8	3753.3	650.0	5.9	-21.0	278.8	9.2	9.1	-1.4	315.8	319.4	1.1	12.3	4.2	24.
12.8	43.7	4072.7	625.0	3.4	-16.4	269.1	12.3	12.3	0.2	316.5	321.9	1.7	22.0	4.4	32.
13.8	46.7	4402.9	600.0	1.7	-0.2	267.5	16.6	16.6	0.7	318.5	328.3	3.2	44.0	5.0	40.
14.3	49.8	4744.6	575.0	-0.8	-8.8	267.6	19.5	19.5	0.8	319.5	330.1	3.4	54.4	5.8	49.
15.9	52.6	5098.1	550.0	-3.4	-12.8	267.8	20.6	20.6	0.8	320.4	328.6	2.6	48.0	6.9	55.
17.0	55.7	5463.8	525.0	-6.9	-14.5	272.7	20.3	20.3	-1.0	320.4	327.9	2.4	54.9	8.1	61.
18.2	58.9	5842.3	500.0	-9.8	-17.5	275.8	18.8	18.7	-1.9	321.3	327.6	1.9	53.2	9.2	65.
19.3	62.3	6237.8	475.0	-10.8	-38.5	282.3	18.6	18.1	-3.9	324.5	325.6	0.3	8.1	10.3	69.
20.7	65.7	6651.6	450.0	-13.3	-39.8	287.9	18.8	18.3	-4.2	326.5	327.5	0.3	8.6	11.6	74.
22.0	69.2	7083.9	425.0	-16.6	-41.7	282.3	18.2	17.7	-3.9	327.7	328.5	0.2	9.2	12.9	77.
23.4	72.7	7536.2	400.0	-20.4	-39.0	279.5	18.6	18.3	-3.1	328.4	329.7	0.3	18.1	14.3	79.
24.8	76.5	8010.2	375.0	-24.6	-36.7	279.8	18.2	17.9	-3.1	329.0	330.5	0.4	31.5	15.9	81.
26.4	80.5	8507.8	350.0	-29.2	-34.1	280.2	19.6	19.3	-3.5	329.3	331.5	0.6	62.7	17.4	83.
27.9	84.5	9075.0	325.0	-32.2	-36.1	278.3	24.3	24.0	-3.5	332.3	334.2	0.5	67.6	19.4	85.
29.7	88.7	9593.8	300.0	-37.6	-41.6	276.3	32.2	32.0	-3.5	332.3	333.5	0.3	65.5	22.3	86.
31.7	93.4	10188.0	275.0	-42.7	-49.0	278.5	35.0	34.6	-5.3	333.4	999.9	99.9	999.9	26.2	88.
33.9	98.1	10823.6	250.0	-48.3	-59.9	280.3	32.7	32.2	-5.9	334.3	999.9	99.9	999.9	31.0	90.
36.7	103.0	11509.3	225.0	-54.1	-69.9	279.6	35.2	34.7	-5.9	335.6	999.9	99.9	999.9	36.5	91.
39.4	108.5	12254.7	200.0	-59.8	-69.9	284.2	36.7	35.6	-9.0	338.0	999.9	99.9	999.9	42.4	93.
42.8	114.5	13083.3	175.0	-63.0	-69.9	286.2	42.2	40.5	-11.8	345.9	999.9	99.9	999.9	50.8	95.
46.1	120.7	14021.9	150.0	-67.3	-69.9	281.5	42.6	41.8	-8.5	354.2	999.9	99.9	999.9	58.9	96.
50.1	127.7	15125.9	125.0	-67.0	-69.9	297.2	40.8	36.3	-18.7	373.7	999.9	99.9	999.9	68.7	98.
54.8	135.5	16456.8	100.0	-71.8	-69.9	290.8	26.3	24.6	-9.3	389.0	999.9	99.9	999.9	77.1	100.
60.8	143.0	18148.4	75.0	-75.0	-69.9	317.5	10.5	7.1	-7.7	415.7	999.9	99.9	999.9	82.6	101.
69.8	151.3	20584.2	50.0	-63.1	-69.9	4.5	5.7	-0.4	-5.6	495.0	999.9	99.9	999.9	84.4	102.
84.5	160.3	24987.8	25.0	-50.7	-69.9	100.5	3.7	-3.6	0.7	639.5	999.9	99.9	999.9	82.9	103.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 235
JACKSON, MISS

7 MAY 1975
215 GMT

162 27. C

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTD GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.8	100.0	998.0	23.9	22.2	140.0	2.6	-1.7	2.0	249.5	344.4	17.1	90.0	0.0	0.
99.9	99.9	99.9	1010.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.6	6.0	303.8	975.0	23.1	19.4	158.1	9.0	-3.4	8.3	300.4	339.3	14.7	79.4	0.4	323.
1.4	10.5	530.4	950.0	21.1	18.6	168.5	11.2	-2.2	10.9	300.5	338.6	14.4	85.5	0.8	334.
2.2	12.9	761.4	925.0	19.6	16.7	181.2	12.5	0.3	12.5	301.1	336.0	13.1	83.2	1.3	342.
3.0	15.4	998.0	900.0	18.7	16.1	166.8	11.7	3.4	11.2	302.5	337.1	12.9	84.7	1.9	350.
3.8	17.9	1239.9	875.0	17.1	15.5	211.6	10.3	5.4	8.8	303.3	337.9	12.0	90.4	2.3	357.
4.6	20.5	1487.5	850.0	15.5	14.1	220.9	10.9	7.2	8.3	304.0	336.7	12.0	91.2	2.7	4.
5.3	23.1	1740.9	825.0	13.6	12.6	232.1	8.6	6.8	5.3	304.5	335.0	11.2	93.3	3.1	10.
6.1	25.9	2000.3	800.0	11.7	10.9	228.4	7.9	5.9	5.3	305.0	333.4	10.4	95.1	3.4	14.
7.0	28.6	2265.9	775.0	9.9	9.1	231.6	8.0	6.3	5.0	305.7	331.8	9.4	94.3	3.7	17.
7.7	31.4	2538.6	750.0	9.1	3.6	239.4	8.3	7.2	4.2	307.3	326.2	6.7	68.7	4.0	21.
8.6	34.3	2819.3	725.0	7.9	-0.0	251.6	8.3	7.8	2.6	308.9	324.1	5.3	57.0	4.4	25.
9.4	37.0	3108.8	700.0	7.5	-3.7	264.6	8.8	8.7	0.8	311.4	323.7	4.2	44.7	4.6	29.
10.4	40.0	3407.6	675.0	6.5	-15.3	273.4	10.5	10.4	-0.6	313.1	318.5	1.7	19.2	4.9	35.
11.6	42.9	3716.1	650.0	5.1	-26.9	275.0	12.8	12.7	-1.1	314.8	316.9	0.6	7.6	5.3	42.
12.6	46.0	4034.7	625.0	2.9	-28.3	276.3	13.9	13.8	-1.5	315.8	317.8	0.6	7.9	5.9	49.
13.6	49.3	4363.3	600.0	0.0	-30.1	279.3	15.0	14.6	-2.4	316.2	318.0	0.5	8.1	6.5	55.
14.8	52.3	4702.3	575.0	-2.6	-31.8	281.2	17.3	17.0	-3.3	317.0	318.6	0.5	8.4	7.4	61.
15.9	55.6	5052.7	550.0	-5.6	-33.8	281.2	19.5	19.1	-3.8	317.5	318.8	0.4	8.7	8.3	67.
17.0	58.9	5415.8	525.0	-7.9	-35.3	280.8	19.2	18.8	-3.6	319.0	320.2	0.4	8.9	9.5	71.
18.3	62.4	5792.9	500.0	-10.9	-37.3	279.4	20.0	19.7	-3.2	319.7	320.8	0.3	9.2	10.8	75.
19.7	65.9	6186.1	475.0	-11.9	-39.8	268.3	20.9	20.9	0.6	323.2	324.2	0.2	7.6	12.3	78.
21.0	69.7	6598.6	450.0	-14.0	-38.4	256.6	18.1	17.6	4.2	325.7	326.8	0.3	10.8	14.0	78.
22.3	73.3	7029.5	425.0	-17.6	-39.5	261.0	18.3	18.1	2.9	326.4	327.4	0.3	12.6	15.3	78.
23.7	77.3	7480.7	400.0	-21.1	-41.7	272.4	20.3	20.3	-0.8	327.5	328.4	0.2	13.7	16.9	79.
25.1	81.3	7953.0	375.0	-25.1	-43.9	281.3	21.3	20.8	-4.2	329.3	329.0	0.2	15.4	18.6	80.
26.5	85.6	8449.4	350.0	-30.0	-47.1	293.8	21.1	19.3	-8.5	328.3	328.9	0.2	16.9	20.1	83.
28.2	90.3	8971.9	325.0	-34.9	-45.8	296.1	27.1	24.3	-11.9	328.5	329.2	0.2	31.5	22.1	86.
30.0	94.8	9525.7	300.0	-38.4	-43.6	286.7	29.2	28.0	-8.4	331.1	332.1	0.3	57.9	25.1	89.
31.8	99.6	10119.5	275.0	-42.4	99.9	270.0	31.0	31.0	0.0	333.8	999.9	99.9	999.9	28.0	90.
33.7	104.8	10755.8	250.0	-48.4	99.9	269.8	35.4	35.4	0.1	334.2	999.9	99.9	999.9	32.0	90.
36.0	110.4	11441.6	225.0	-53.1	99.9	280.5	32.7	32.2	-5.9	337.1	999.9	99.9	999.9	36.9	91.
38.3	116.0	12198.8	200.0	-59.7	99.9	283.3	30.0	29.2	-6.0	338.2	999.9	99.9	999.9	41.2	92.
41.4	122.5	13014.3	175.0	-64.4	99.9	275.4	39.0	38.8	-3.6	343.7	999.9	99.9	999.9	47.5	93.
44.8	129.3	13981.4	150.0	-67.0	99.9	277.8	40.0	39.7	-5.5	354.6	999.9	99.9	999.9	55.7	93.
49.1	136.5	15052.0	125.0	-67.6	99.9	289.3	46.3	43.7	-15.3	372.6	999.9	99.9	999.9	66.2	95.
54.1	143.5	16394.6	100.0	-66.9	99.9	289.3	27.9	26.4	-9.2	398.6	999.9	99.9	999.9	76.9	97.
60.8	151.0	18129.0	75.0	-68.2	99.9	294.1	22.1	20.2	-9.0	429.9	999.9	99.9	999.9	81.5	98.
70.2	158.7	20638.8	50.0	-63.8	99.9	75.9	6.7	-6.5	-1.6	493.3	999.9	99.9	999.9	80.3	100.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 240
LAKE CHARLES, LA

7 MAY 1975
215 GMT

165 23. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.5	5.0	1006.4	25.0	23.2	999.9	99.9	99.9	99.9	300.1	347.7	18.2	90.0	999.9	999.9
0.2	5.3	61.6	1000.0	24.6	23.4	999.9	99.9	99.9	99.9	300.3	348.8	18.5	93.6	999.9	999.9
0.9	6.9	284.1	975.0	23.2	23.2	999.9	99.9	99.9	99.9	301.0	350.2	18.7	101.3	999.9	999.9
1.8	9.2	511.7	950.0	22.1	21.7	999.9	99.9	99.9	99.9	302.3	348.4	17.5	97.8	999.9	999.9
2.6	11.3	744.3	925.0	21.3	20.3	999.9	99.9	99.9	99.9	303.3	347.3	16.5	94.2	999.9	999.9
3.4	13.5	982.7	900.0	20.3	15.2	999.9	99.9	99.9	99.9	304.1	337.8	12.5	75.2	999.9	999.9
4.2	15.8	1226.4	875.0	21.0	14.9	999.9	99.9	99.9	99.9	307.3	341.2	12.3	68.0	999.9	999.9
5.0	18.1	1477.1	850.0	19.0	14.1	999.9	99.9	99.9	99.9	307.7	340.8	12.7	73.2	999.9	999.9
5.9	27.4	1734.1	825.0	17.6	13.9	999.9	99.9	99.9	99.9	308.8	342.7	12.2	79.0	999.9	999.9
6.8	22.7	1597.4	800.0	16.8	8.3	999.9	99.9	99.9	99.9	310.2	335.5	9.1	59.5	999.9	999.9
7.7	25.2	2268.0	775.0	17.1	-12.0	999.9	99.9	99.9	99.9	312.4	318.9	2.1	13.2	999.9	999.9
8.7	27.6	2546.0	750.0	14.9	-23.5	999.9	99.9	99.9	99.9	312.9	315.4	0.8	5.4	999.9	999.9
9.6	30.1	2831.2	725.0	12.8	-24.6	999.9	99.9	99.9	99.9	313.6	315.9	0.7	5.6	999.9	999.9
10.7	32.8	3124.1	700.0	10.7	-17.8	999.9	99.9	99.9	99.9	314.5	319.0	1.4	12.4	999.9	999.9
11.8	35.5	3425.5	675.0	8.4	-11.8	999.9	99.9	99.9	99.9	315.3	322.5	2.3	22.5	999.9	999.9
12.8	38.1	3736.0	650.0	6.2	-10.2	999.9	99.9	99.9	99.9	316.4	324.8	2.7	29.6	999.9	999.9
13.9	40.8	4056.2	625.0	4.0	-4.9	999.9	99.9	99.9	99.9	317.6	330.5	4.3	52.1	999.9	999.9
15.7	43.7	4336.8	600.0	0.8	-3.5	999.9	99.9	99.9	99.9	317.7	332.7	5.0	72.6	999.9	999.9
16.1	46.7	4727.5	575.0	-1.4	-15.1	999.9	99.9	99.9	99.9	318.5	325.1	2.1	34.3	999.9	999.9
17.3	49.8	5080.0	550.0	-3.9	-16.8	999.9	99.9	99.9	99.9	319.7	325.7	1.9	35.7	999.9	999.9
18.5	52.7	5445.0	525.0	-7.3	-23.8	999.9	99.9	99.9	99.9	319.7	323.2	1.1	25.2	999.9	999.9
19.8	55.8	5822.9	500.0	-10.1	-51.1	999.9	99.9	99.9	99.9	320.7	321.2	0.1	3.8	999.9	999.9
21.2	59.1	6217.2	475.0	-11.6	-57.3	999.9	99.9	99.9	99.9	323.5	323.7	0.7	1.0	999.9	999.9
22.6	62.6	6628.9	450.0	-14.7	-59.3	999.9	99.9	99.9	99.9	324.7	324.8	0.0	1.0	999.9	999.9
24.1	66.0	7059.3	425.0	-17.1	-60.8	999.9	99.9	99.9	99.9	327.0	327.1	0.0	1.0	999.9	999.9
25.6	69.7	7511.4	400.0	-20.5	-46.2	999.9	99.9	99.9	99.9	328.3	328.8	0.1	7.9	999.9	999.9
27.1	73.4	7984.7	375.0	-25.1	-46.1	999.9	99.9	99.9	99.9	328.3	328.9	0.2	13.0	999.9	999.9
28.7	77.5	8491.5	350.0	-29.7	-38.3	999.9	99.9	99.9	99.9	328.7	330.2	0.4	44.1	999.9	999.9
30.4	81.5	9006.9	325.0	-32.7	-36.3	999.9	99.9	99.9	99.9	331.5	333.4	0.5	70.1	999.9	999.9
32.3	85.8	9565.2	300.0	-37.3	-41.3	999.9	99.9	99.9	99.9	332.8	334.0	0.3	65.4	999.9	999.9
34.4	90.5	10159.7	275.0	-42.8	99.9	999.9	99.9	99.9	99.9	333.3	999.9	99.9	999.9	999.9	999.9
36.8	95.4	10796.1	250.0	-47.7	99.9	999.9	99.9	99.9	99.9	335.2	999.9	99.9	999.9	999.9	999.9
39.5	100.5	11482.6	225.0	-53.9	99.9	999.9	99.9	99.9	99.9	336.0	999.9	99.9	999.9	999.9	999.9
42.5	106.3	12230.1	200.0	-58.1	99.9	999.9	99.9	99.9	99.9	340.8	999.9	99.9	999.9	999.9	999.9
45.7	112.5	13063.3	175.0	-62.8	99.9	999.9	99.9	99.9	99.9	346.3	999.9	99.9	999.9	999.9	999.9
49.4	115.5	14010.7	150.0	-63.9	99.9	999.9	99.9	99.9	99.9	360.0	999.9	99.9	999.9	999.9	999.9
53.7	127.3	15117.2	125.0	-67.8	99.9	999.9	99.9	99.9	99.9	372.3	999.9	99.9	999.9	999.9	999.9
58.5	136.0	16454.4	100.0	-70.4	99.9	999.9	99.9	99.9	99.9	391.8	999.9	99.9	999.9	999.9	999.9
64.3	145.5	18152.8	75.0	-72.1	99.9	999.9	99.9	99.9	99.9	421.7	999.9	99.9	999.9	999.9	999.9
72.8	156.5	21000.6	50.0	-61.8	99.9	999.9	99.9	99.9	99.9	498.0	999.9	99.9	999.9	999.9	999.9
86.7	168.0	25019.4	25.0	-49.1	99.9	999.9	99.9	99.9	99.9	643.4	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 248
SHREVEPORT, LA

7 MAY 1975
248 GMT

164 12. C

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SFC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.1	79.0	997.3	24.4	22.8	140.0	2.6	-1.7	2.0	300.2	347.1	17.9	91.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.7	6.6	278.5	975.0	24.5	22.5	181.9	10.3	0.3	10.3	302.2	349.7	17.9	88.7	0.3	351.
1.7	8.7	507.1	950.0	23.8	21.8	194.7	9.1	2.3	8.8	303.7	350.8	17.7	88.9	0.9	2.
2.6	10.6	740.9	925.0	22.2	20.8	201.1	8.2	3.0	7.7	304.4	350.0	17.0	91.8	1.4	8.
3.6	12.6	979.7	900.0	20.9	19.4	201.9	7.1	2.6	6.6	305.2	348.4	16.0	91.5	1.8	12.
4.5	14.7	1223.7	875.0	18.7	17.5	207.5	7.7	3.6	6.9	305.2	344.6	14.6	92.6	2.2	14.
5.3	16.6	1473.0	850.0	17.0	15.8	215.3	7.1	4.1	5.8	305.8	342.4	13.5	92.6	2.6	17.
6.3	18.9	1727.8	825.0	15.3	14.1	210.4	5.3	2.7	4.5	306.4	340.3	12.4	92.8	2.9	19.
7.2	20.8	1990.0	800.0	14.7	9.3	197.6	7.2	2.2	6.9	308.0	334.0	9.3	70.3	3.2	19.
8.3	23.1	2257.9	775.0	15.9	-13.0	190.4	8.6	1.6	8.4	311.1	316.7	1.8	12.5	3.8	19.
9.5	25.4	2535.1	750.0	14.0	-20.1	189.8	8.9	1.5	8.7	311.9	315.2	1.0	7.8	4.3	17.
10.6	27.5	2819.2	725.0	11.9	-19.7	197.6	9.2	2.8	8.8	312.6	316.2	1.1	9.2	5.0	16.
11.9	30.0	3111.0	700.0	9.4	-12.7	215.9	8.5	5.0	6.9	313.2	319.6	2.1	19.5	5.7	17.
13.3	32.5	3411.0	675.0	6.8	-15.6	221.6	10.1	6.7	7.6	313.5	318.8	1.7	18.3	6.3	20.
14.5	35.0	3719.4	650.0	4.7	-17.3	221.2	10.8	7.1	8.1	314.4	319.2	1.5	18.5	7.1	22.
15.9	37.4	4037.8	625.0	2.3	-16.0	225.5	13.7	9.8	9.6	315.3	320.9	1.8	24.4	8.0	25.
17.3	40.1	4365.9	600.0	-0.4	-13.1	230.2	19.4	14.9	12.4	315.9	323.2	2.3	37.4	9.3	28.
18.5	42.6	4705.0	575.0	-2.9	-10.6	237.6	22.8	19.3	12.2	317.0	326.2	3.0	55.2	10.7	32.
20.0	45.4	5055.9	550.0	-5.2	-12.7	242.6	26.3	23.4	12.1	318.2	326.4	2.6	55.5	12.7	37.
21.4	48.4	5420.0	525.0	-7.1	-22.1	244.9	25.8	23.4	11.0	320.0	324.1	1.2	29.2	14.8	41.
22.8	51.1	5799.2	500.0	-10.0	-35.2	252.4	22.7	21.6	6.9	320.9	322.2	0.4	10.5	16.6	44.
24.4	54.3	6192.0	475.0	-11.7	-57.3	266.7	19.8	19.8	1.2	323.4	323.6	0.0	1.0	18.2	47.
26.0	57.3	6603.9	450.0	-14.7	-59.2	268.7	20.4	20.4	0.5	324.7	324.9	0.0	1.0	19.7	51.
27.9	60.6	7033.8	425.0	-18.1	-61.4	265.1	24.0	23.9	2.0	325.8	325.8	0.0	1.0	21.8	55.
29.7	64.1	7483.6	400.0	-21.7	-63.8	267.7	23.7	23.7	1.0	326.7	326.7	0.0	1.0	24.0	58.
31.5	67.6	7954.9	375.0	-26.0	-66.0	271.6	21.5	21.5	-0.6	327.2	327.2	0.0	1.1	26.2	61.
33.5	71.1	8450.3	350.0	-30.0	-51.8	271.7	29.9	29.9	-0.9	328.3	328.6	0.1	10.0	28.9	64.
35.5	75.2	8973.6	325.0	-33.7	-46.2	264.9	36.6	36.5	3.3	330.2	330.9	0.2	26.8	32.3	67.
37.8	79.3	9531.4	300.0	-37.0	-48.3	258.7	40.9	40.1	8.0	333.2	333.8	0.2	29.4	37.5	69.
40.3	83.6	10126.9	275.0	-42.0	99.9	255.0	34.8	33.6	9.0	334.4	999.9	99.9	999.9	43.5	70.
42.9	88.2	10764.3	250.0	-47.4	99.9	256.1	37.8	36.7	9.1	335.6	999.9	99.9	999.9	49.1	71.
45.4	93.3	11451.5	225.0	-53.4	99.9	264.5	32.0	31.8	3.1	336.8	999.9	99.9	999.9	54.2	72.
48.6	98.8	12202.0	200.0	-58.4	99.9	273.1	29.0	29.0	-1.5	340.3	999.9	99.9	999.9	60.8	73.
51.8	104.5	13029.8	175.0	-63.6	99.9	269.7	41.4	41.4	0.2	344.9	999.9	99.9	999.9	67.5	75.
55.6	111.7	13971.6	150.0	-65.0	99.9	264.0	43.0*	42.8	4.5	358.1	999.9	99.9	999.9	75.4	76.
60.2	118.7	15082.1	125.0	-66.0	99.9	272.3	47.5*	47.5	-1.9	375.5	999.9	99.9	999.9	85.5	78.
65.3	127.5	16430.0	100.0	-68.3	99.9	266.1	31.1*	31.1	2.1	395.8	999.9	99.9	999.9	97.3	80.
71.9	137.7	18169.0	75.0	-68.3	99.9	88.8	11.3*	-11.3	-0.2	429.7	999.9	99.9	999.9	101.7	81.
81.6	145.0	20634.2	50.0	-63.1	99.9	91.4	14.6	-14.6	0.4	494.9	999.9	99.9	999.9	100.1	80.
97.4	161.5	25033.1	25.0	-50.0	99.9	81.6	4.5	-4.4	-0.7	641.2	999.9	99.9	999.9	96.9	82.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 250
BROWNSVILLE, TEX

7 MAY 1975
300 GMT

159 15. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.7	7.0	1002.2	26.7	24.2	135.0	5.2	-3.7	3.7	302.3	353.3	19.3	86.0	0.0	0.
0.1	4.9	26.5	1000.0	26.6	24.8	139.3	10.7	-7.0	8.1	302.5	355.8	20.2	90.0	0.1	336.
0.7	6.6	250.8	975.0	24.7	23.5	138.4	13.6	-9.0	10.2	302.6	353.1	19.1	93.0	0.5	316.
1.6	8.7	490.3	950.0	25.5	21.9	110.0	7.2	-6.7	2.4	305.5	353.0	17.7	80.3	0.9	313.
2.4	10.6	715.9	925.0	25.4	19.7	61.9	6.9	-6.1	-3.2	307.5	350.6	15.8	70.6	1.2	302.
3.2	12.6	958.0	900.0	26.9	14.5	38.4	7.1	-4.4	-5.6	310.8	343.7	11.8	47.3	1.3	285.
4.1	14.8	1237.0	875.0	25.9	11.8	26.9	5.4	-2.4	-4.8	312.1	340.5	10.0	41.5	1.5	273.
5.0	16.7	1461.6	850.0	24.0	10.1	14.8	5.2	-1.3	-5.0	312.6	338.8	9.2	41.4	1.6	265.
5.9	18.9	1721.9	825.0	21.9	8.3	6.3	4.9	-0.5	-4.8	312.9	337.0	8.4	41.7	1.7	255.
6.7	20.9	1988.4	800.0	20.8	1.4	347.4	2.6	0.6	-2.6	314.0	329.7	5.3	27.7	1.7	249.
7.6	23.2	2262.0	775.0	19.0	-0.5	279.9	1.6	1.6	-0.3	314.5	329.1	4.8	26.7	1.7	247.
8.6	25.4	2542.5	750.0	17.1	-1.2	242.6	5.1	4.6	2.4	315.8	329.8	4.7	28.7	1.5	245.
9.7	27.6	2831.4	725.0	16.9	-2.0	227.9	10.1	7.5	6.8	318.6	332.5	4.6	27.4	1.1	250.
10.6	30.1	3129.2	700.0	14.9	-3.5	222.3	15.9	10.7	11.8	319.6	332.5	4.2	27.7	0.6	290.
11.7	32.6	3435.9	675.0	12.7	-5.0	217.8	16.4	10.0	12.9	320.4	332.5	3.9	28.8	1.2	15.
12.8	35.1	3750.7	650.0	9.6	-5.1	216.2	15.5	9.1	12.5	320.4	332.8	4.0	34.8	2.1	25.
13.9	37.4	4074.6	625.0	6.5	-8.3	214.5	15.9	9.0	13.1	320.3	330.5	3.3	33.7	3.1	28.
15.0	40.1	4407.5	600.0	3.3	-9.2	215.7	16.3	9.5	13.2	320.3	335.2	3.2	39.3	4.2	30.
16.2	42.7	4751.1	575.0	0.3	-11.0	217.7	17.0	10.4	13.4	320.7	329.8	2.9	42.1	5.3	32.
17.2	45.4	5105.5	550.0	-3.1	-13.8	221.4	17.2	11.4	12.9	320.7	328.3	2.4	43.2	6.3	32.
18.2	48.4	5471.8	525.0	-6.2	-16.1	230.1	18.0	13.8	11.6	321.2	327.8	2.1	45.5	7.4	34.
19.5	51.1	5851.8	500.0	-8.4	-23.3	242.4	18.0	15.9	8.3	322.9	326.8	1.2	28.9	8.8	38.
20.8	54.1	6248.5	475.0	-10.6	-29.0	249.3	15.5	14.5	5.5	324.9	327.4	0.7	20.2	10.0	42.
22.2	57.1	6661.8	450.0	-14.4	-30.1	248.0	14.9	13.8	5.6	325.1	327.5	0.7	24.9	11.0	45.
23.4	60.4	7092.4	425.0	-17.7	-30.3	238.8	16.7	14.3	8.7	326.3	328.8	0.7	32.2	12.1	46.
24.8	63.9	7543.5	400.0	-20.4	-34.8	239.3	19.5	16.8	10.0	328.5	330.2	0.5	26.2	13.6	48.
26.5	67.3	8017.5	375.0	-24.7	-38.5	238.8	21.6	18.4	11.2	328.9	330.2	0.4	26.1	15.7	49.
28.3	70.8	8515.4	350.0	-28.8	-41.1	237.9	23.8	20.1	12.6	329.8	330.9	0.3	29.3	18.1	50.
31.3	74.5	9042.0	325.0	-32.5	-42.8	239.8	24.3	21.0	12.2	331.8	332.8	0.3	34.8	20.9	52.
32.0	78.6	9601.0	300.0	-36.8	-44.7	243.2	27.4	24.4	12.4	333.4	334.3	0.2	43.1	23.5	53.
33.9	82.6	10196.7	275.0	-42.1	-49.9	253.2	29.2	28.0	8.4	334.2	999.9	99.9	999.9	26.6	54.
36.0	87.0	10833.9	250.0	-47.4	-59.9	251.0	31.7	29.9	10.3	335.5	999.9	99.9	999.9	30.5	57.
38.4	92.0	11520.8	225.0	-52.9	-69.9	256.8	38.1	37.1	8.7	337.4	999.9	99.9	999.9	34.9	59.
41.5	97.0	12276.6	200.0	-55.9	-79.9	256.2	44.1	42.8	10.5	344.2	999.9	99.9	999.9	42.8	62.
44.7	102.8	13114.9	175.0	-62.0	-89.9	255.1	45.5	44.0	11.7	347.6	999.9	99.9	999.9	51.1	64.
48.4	109.0	14063.4	150.0	-63.3	-99.9	251.8	42.0	39.9	13.1	361.0	999.9	99.9	999.9	60.4	66.
52.4	116.0	15172.4	125.0	-66.6	-99.9	263.4	25.3	25.2	2.9	374.4	999.9	99.9	999.9	68.8	67.
56.5	124.7	16510.1	100.0	-71.5	-99.9	181.0	6.0	0.1	6.0	389.7	999.9	99.9	999.9	72.4	67.
61.9	134.5	18167.7	75.0	-76.7	-99.9	77.9	1.2	-1.1	-0.2	412.2	999.9	99.9	999.9	72.6	67.
70.9	145.3	20594.5	50.0	-83.6	-99.9	296.2	1.8	1.6	-0.8	493.6	999.9	99.9	999.9	71.4	66.
85.6	157.0	24980.8	25.0	-80.7	-99.9	210.6	2.5	1.3	2.2	639.0	999.9	99.9	999.9	68.7	67.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 255
VICTORIA, TEX

7 MAY 1975
215 GMT

133 72. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MD	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GH/KG	RH PCT	RANGE KM	AZ DG
0.0	4.8	33.2	1001.3	25.2	23.8	120.7	2.6	-2.3	1.3	300.8	350.4	18.9	92.0	0.0	0.
0.2	4.9	44.5	1000.0	25.2	24.2	123.2	4.1	-3.9	2.5	301.0	352.0	19.4	94.0	0.1	337.
0.8	6.5	269.1	975.0	24.0	23.5	128.6	6.9	-5.4	4.3	301.9	352.1	19.0	96.9	0.3	303.
1.5	8.5	496.2	950.0	22.7	22.2	132.7	5.9	-4.3	4.0	302.7	350.5	18.0	96.7	0.6	309.
2.3	10.5	729.3	925.0	21.4	20.8	116.5	5.2	-4.6	2.3	303.5	348.8	17.0	96.1	0.8	308.
3.1	12.5	967.3	900.0	19.9	18.5	115.6	3.6	-3.3	1.6	304.1	344.7	15.1	91.8	1.0	305.
3.8	14.6	1211.8	875.0	18.9	16.6	116.0	2.6	-2.4	1.2	305.2	342.5	13.8	86.7	1.2	304.
4.7	16.5	1460.2	850.0	17.6	15.6	123.9	2.7	-2.3	1.3	306.4	342.6	13.3	87.9	1.3	303.
5.6	18.7	1715.7	825.0	15.7	14.7	152.2	2.4	-1.1	2.1	306.9	342.3	12.9	94.0	1.4	314.
6.6	20.8	1978.7	800.0	17.4	6.6	253.8	4.6	4.4	1.3	310.8	333.3	7.9	50.7	1.4	310.
7.5	23.3	2249.7	775.0	16.9	-1.7	241.1	6.3	5.5	3.0	312.6	325.6	4.4	28.0	1.2	322.
8.4	25.3	2528.4	750.0	14.7	5.0	221.6	8.7	5.8	6.5	313.5	334.8	7.4	52.4	1.3	339.
9.4	27.5	2814.2	725.0	12.2	3.9	216.6	11.5	6.8	9.2	313.8	334.5	7.1	57.6	1.7	356.
10.4	29.9	3107.3	700.0	10.3	-13.0	219.0	13.3	8.4	10.4	314.1	320.4	2.0	18.0	2.3	8.
11.4	32.4	3408.6	675.0	9.0	-34.7	221.3	16.4	10.9	12.3	315.7	316.7	0.3	2.8	3.1	17.
12.3	34.9	3719.4	650.0	7.1	-35.3	224.7	17.9	12.6	12.7	317.0	318.1	0.3	3.0	4.0	22.
13.3	37.3	4040.1	625.0	4.7	-36.1	229.9	18.4	14.1	11.9	317.8	318.8	0.3	3.2	5.1	28.
14.4	40.3	4370.9	600.0	2.8	-36.8	229.4	18.1	13.2	11.8	319.3	320.3	0.3	3.4	6.2	33.
15.4	42.4	4713.4	575.0	-0.0	-38.0	234.4	16.5	13.4	9.6	320.0	320.8	0.2	3.7	7.2	35.
16.5	45.3	5067.1	550.0	-2.5	-39.1	247.0	17.0	15.7	6.7	321.1	321.9	0.2	4.0	8.2	38.
17.7	48.2	5434.4	525.0	-5.0	-40.3	244.9	18.5	16.7	7.9	322.4	323.2	0.2	4.2	9.3	42.
18.8	51.0	5815.6	500.0	-8.0	-41.8	244.2	18.2	16.4	7.9	323.3	324.0	0.2	4.6	10.4	45.
20.0	54.3	6211.2	475.0	-11.4	-43.6	246.8	20.4	18.7	8.0	323.8	324.4	0.2	4.9	11.8	47.
21.4	57.0	6623.0	450.0	-14.7	-45.4	249.0	19.7	18.4	7.1	324.7	325.3	0.1	5.3	13.4	50.
22.8	60.3	7053.2	425.0	-17.8	-47.2	248.4	22.8	21.2	8.4	326.0	326.5	0.1	5.6	15.1	52.
24.2	63.7	7504.1	400.0	-20.6	-44.9	251.5	26.4	25.0	8.4	328.2	328.8	0.2	5.2	16.8	54.
25.8	67.1	7977.8	375.0	-24.7	-46.5	251.4	26.3	25.0	8.4	328.8	329.4	0.2	11.1	19.4	56.
27.4	70.9	8475.2	350.0	-29.5	-45.0	252.5	27.9	26.6	8.4	329.0	329.7	0.2	20.4	22.0	58.
29.2	74.5	8994.0	325.0	-34.1	-37.8	252.4	33.9	32.3	10.2	329.7	331.3	0.4	68.5	24.8	60.
31.0	78.7	9556.0	300.0	-37.6	-41.3	244.9	35.3	32.0	15.0	332.3	333.6	0.3	67.6	28.7	61.
32.9	82.8	10149.6	275.0	-42.9	99.9	246.0	36.6	33.4	14.9	333.1	999.9	99.9	999.9	33.1	61.
35.1	87.2	10785.1	250.0	-46.3	99.9	246.6	33.7	31.0	13.4	334.3	999.9	99.9	999.9	37.6	62.
37.5	92.3	11469.3	225.0	-54.3	99.9	250.1	41.4	38.9	14.1	335.3	999.9	99.9	999.9	43.3	63.
40.6	97.3	12218.8	200.0	-57.6	99.9	255.3	42.9	41.5	10.9	341.5	999.9	99.9	999.9	53.6	65.
44.3	103.0	13057.3	175.0	-59.6	99.9	257.6	46.0	45.0	9.9	351.5	999.9	99.9	999.9	59.9	67.
47.9	109.5	14020.6	150.0	-62.2	99.9	252.1	39.9	37.0	12.0	363.0	999.9	99.9	999.9	68.3	68.
52.6	116.3	15135.7	125.0	-65.8	99.9	277.4	28.8	28.6	-3.7	375.8	999.9	99.9	999.9	78.0	69.
57.5	125.0	16473.5	100.0	-71.9	99.9	270.0	18.1	18.1	0.0	388.9	999.9	99.9	999.9	85.4	71.
63.7	135.0	18155.4	75.0	-75.1	99.9	999.9	99.9	99.9	99.9	415.5	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 260
STEPHENVILLE, TEX

7 MAY 1975
215 GMT

161 15. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	9.4	399.0	960.0	21.0	8.9	200.0	2.1	0.7	2.0	298.6	319.0	7.5	46.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.2	10.2	490.7	950.0	25.2	11.4	999.9	99.9	99.9	99.9	304.0	329.1	9.1	42.6	999.9	999.
1.0	12.5	724.2	925.0	23.6	5.4	999.9	99.9	99.9	99.9	304.3	321.4	6.1	30.8	999.9	999.
1.9	14.9	962.2	900.0	21.3	3.9	107.4	1.3	-1.3	0.4	304.2	320.1	5.6	31.9	0.1	231.
2.6	17.0	1205.2	875.0	19.2	3.2	129.0	2.5	-1.9	1.5	304.5	320.2	5.5	34.6	0.2	255.
3.5	19.5	1453.4	850.0	16.9	3.1	144.2	3.0	-1.8	2.5	304.6	320.7	5.7	39.9	0.3	286.
4.4	21.8	1797.1	825.0	15.8	-5.7	121.0	2.9	-2.5	1.5	305.7	314.7	3.0	22.4	0.4	295.
5.3	24.3	1967.3	800.0	14.2	-4.2	191.1	3.5	0.7	3.4	306.7	317.1	3.5	27.8	0.6	301.
6.3	26.7	2234.6	775.0	12.4	0.6	234.9	7.3	6.0	4.2	307.8	322.7	5.2	44.2	0.6	334.
7.2	29.3	2508.8	750.0	11.0	-4.3	238.7	10.2	8.7	5.3	309.0	320.0	3.7	34.1	0.8	11.
8.0	32.1	2790.7	725.0	9.2	-8.8	235.9	12.8	10.6	7.2	309.9	318.1	2.7	27.1	1.3	31.
8.8	34.9	3080.5	700.0	8.1	-17.0	234.2	16.1	13.1	9.4	311.6	316.1	1.4	15.0	1.9	39.
9.8	37.4	3379.6	675.0	6.4	-16.0	230.6	18.1	14.0	11.5	313.0	318.2	1.6	18.4	2.9	44.
10.7	40.3	3668.0	650.0	4.5	-20.9	228.9	17.4	13.1	11.5	314.2	317.8	1.1	13.7	3.9	45.
11.9	43.0	4005.1	625.0	1.7	-23.0	234.9	17.8	14.6	10.3	314.4	317.6	1.0	14.0	5.1	46.
12.9	46.1	4332.1	600.0	-0.9	-24.9	237.6	19.4	16.4	10.4	315.1	317.9	0.8	14.2	6.3	48.
13.9	49.1	4670.9	575.0	-2.5	-26.0	232.3	20.3	16.1	12.4	317.2	319.8	0.8	14.3	7.5	50.
15.0	52.1	5021.6	550.0	-5.5	-28.3	232.9	22.2	17.7	13.4	317.6	319.8	0.7	14.6	8.9	50.
16.2	55.3	5384.5	525.0	-8.5	-30.6	236.4	22.7	18.9	12.6	318.2	320.1	0.6	14.8	10.4	51.
17.3	58.6	5760.0	500.0	-12.4	-33.5	235.6	22.8	18.8	12.9	318.0	319.5	0.4	15.2	12.0	51.
18.6	62.0	6149.8	475.0	-15.1	-35.6	233.1	25.4	20.3	15.2	319.3	320.6	0.4	15.4	13.7	52.
19.9	65.4	6556.6	450.0	-17.8	-37.7	230.1	27.5	21.1	17.7	320.8	322.0	0.3	15.6	15.7	52.
21.1	69.0	6981.9	425.0	-20.3	-39.6	230.1	28.2	21.6	18.1	323.0	324.0	0.3	15.8	17.9	51.
22.7	72.7	7428.0	400.0	-23.7	-42.2	238.0	28.8	24.4	15.2	324.2	325.0	0.2	16.1	20.5	52.
24.1	76.7	7895.9	375.0	-27.4	-45.1	246.5	34.4	31.5	13.7	325.3	325.9	0.2	16.5	23.1	53.
25.6	80.6	8390.1	350.0	-30.2	-47.4	248.5	42.2	39.2	15.5	327.9	328.5	0.1	16.7	26.6	55.
27.4	85.0	8912.0	325.0	-34.8	-50.0	246.8	40.9	37.6	16.1	328.6	329.1	0.1	19.4	30.7	57.
29.0	89.2	9466.2	300.0	-38.8	-53.3	241.6	44.9	39.5	21.4	330.5	330.9	0.1	19.7	34.9	58.
30.8	94.0	10057.7	275.0	-42.9	-57.9	238.1	44.6	37.9	23.5	333.1	999.9	99.9	999.9	39.9	58.
33.1	98.8	10593.1	250.0	-47.8	-59.9	238.8	47.9	41.0	24.8	335.0	999.9	99.9	999.9	46.8	58.
35.9	104.1	11330.5	225.0	-52.8	-59.9	242.7	51.0	45.3	23.4	337.6	999.9	99.9	999.9	54.5	58.
38.8	109.8	12133.0	200.0	-57.2	-59.9	243.4	48.3*	43.2	21.6	342.2	999.9	99.9	999.9	63.2	59.
42.1	115.8	12975.1	175.0	-57.0	-59.9	246.3	38.8*	35.6	15.6	355.9	999.9	99.9	999.9	72.6	60.
45.4	122.7	13947.3	150.0	-59.5	-59.9	246.9	51.6*	47.5	20.2	367.7	999.9	99.9	999.9	79.6	61.
49.7	130.3	15087.6	125.0	-61.6	-59.9	258.3	41.4*	40.6	8.4	383.5	999.9	99.9	999.9	91.7	62.
54.5	138.1	16450.4	100.0	-65.8	-59.9	252.1	31.6*	30.0	9.7	400.6	999.9	99.9	999.9	100.6	63.
60.2	146.3	18179.7	75.0	-69.8	-59.9	161.0	3.0*	-1.0	2.8	426.7	999.9	99.9	999.9	106.8	64.
68.1	155.5	20645.1	50.0	-61.4	-59.9	68.2	16.6*	-15.4	-6.2	498.9	999.9	99.9	999.9	105.8	63.
80.6	165.0	25048.4	25.0	-52.4	-59.9	34.6	8.2	-4.6	-6.7	634.2	999.9	99.9	999.9	103.2	63.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 261
DEL RIO, TX

7 MAY 1975
215 GMT

157 10. 0

TIME MIN	CATCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH. PCT	RANGE KM	AZ DG
0.0	8.5	314.0	968.3	27.2	2.3	100.0	5.2	-5.1	0.9	303.8	317.1	4.7	20.0	0.0	0.
99.9	99.9	99.9	1300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.6	10.1	483.5	950.0	29.5	9.4	97.9	10.0	-9.9	1.4	308.2	331.3	7.9	28.8	0.4	266.
1.6	12.1	720.2	925.0	27.7	7.1	89.1	8.6	-8.6	-0.1	308.6	328.2	6.9	27.2	0.9	270.
2.5	14.4	961.9	900.0	25.5	5.3	85.7	6.9	-6.9	-0.5	308.7	326.5	6.2	27.2	1.3	269.
3.4	16.5	1208.3	875.0	23.2	3.3	75.7	6.2	-6.0	-1.5	308.6	324.7	5.6	27.3	1.7	268.
4.4	18.7	1459.9	850.0	21.2	1.7	58.1	5.7	-4.8	-3.0	309.1	323.9	5.1	27.4	2.0	264.
5.4	20.9	1717.0	825.0	18.6	-0.5	61.5	4.6	-4.0	-2.2	308.9	322.0	4.5	27.5	2.2	261.
6.3	23.3	1979.9	800.0	16.6	-0.9	64.2	4.1	-3.7	-1.8	309.4	322.6	4.5	30.4	2.5	259.
7.3	25.6	2248.9	775.0	14.2	-2.9	128.5	1.5	-1.1	0.9	309.6	321.3	4.0	30.4	2.7	259.
8.3	28.0	2524.4	750.0	12.2	-4.6	214.0	3.8	2.1	3.1	310.3	321.1	3.6	30.4	2.6	262.
9.3	30.6	2807.6	725.0	10.7	-5.7	238.7	7.6	6.5	4.0	311.6	322.0	3.5	31.1	2.4	266.
10.4	33.2	3098.9	700.0	8.8	-6.4	245.6	11.6	10.6	4.8	312.7	322.9	3.4	33.3	1.7	275.
11.6	35.7	3398.4	675.0	5.9	-8.9	244.0	13.8	12.4	6.0	312.6	321.4	2.9	33.6	1.1	299.
12.8	38.3	3705.9	650.0	3.4	-10.1	251.3	16.7	15.9	5.4	313.2	321.5	2.7	36.3	1.0	9.
14.0	40.9	4022.5	625.0	0.4	-11.8	251.3	16.4	15.5	5.3	313.2	320.9	2.5	39.4	1.8	44.
15.3	43.8	4348.3	600.0	-2.5	-13.9	246.0	18.4	16.8	7.5	313.5	320.2	2.2	40.9	3.1	54.
16.5	46.8	4686.2	575.0	-3.0	-21.6	247.6	21.1	19.5	8.1	316.6	320.4	1.2	22.1	4.5	58.
17.6	49.8	5036.8	550.0	-4.6	-24.7	244.3	23.6	21.3	10.2	318.8	321.9	0.9	18.8	5.9	60.
18.8	52.6	5401.5	525.0	-7.2	-31.4	240.0	26.1	22.6	13.0	319.8	321.6	0.5	12.3	7.8	60.
20.1	55.7	5779.5	500.0	-10.0	-33.5	239.6	27.2	23.5	13.8	320.8	322.4	0.4	12.6	9.9	60.
21.6	58.9	6172.9	475.0	-12.7	-35.4	240.1	28.8	24.9	14.4	322.3	323.7	0.4	12.8	12.4	60.
23.0	62.3	6584.0	450.0	-14.7	-36.9	249.5	29.8	27.9	10.4	324.7	326.0	0.4	13.0	14.9	61.
24.7	65.7	7015.0	425.0	-17.1	-36.5	250.7	31.4	29.6	10.3	327.0	328.4	0.4	16.6	19.7	63.
26.5	69.3	7466.0	400.0	-21.2	-38.0	249.6	33.4	31.3	11.6	327.5	329.8	0.4	20.0	21.4	64.
28.2	72.8	7939.0	375.0	-25.0	-39.6	249.5	38.1	35.7	13.3	328.4	329.6	0.3	24.0	25.0	65.
29.9	76.7	8436.8	350.0	-28.9	-40.1	246.6	39.1	35.9	15.6	329.7	330.9	0.3	32.7	28.8	65.
31.6	80.7	8963.2	325.0	-32.7	-41.3	240.9	42.3	37.0	20.6	331.6	332.7	0.3	41.4	33.1	65.
33.3	85.0	9521.9	300.0	-37.4	-45.9	233.7	42.2	34.0	24.9	332.6	333.4	0.2	40.3	37.4	64.
35.2	89.4	10116.1	275.0	-42.7	99.9	231.6	40.9	32.0	25.4	333.3	999.9	99.9	999.9	41.9	63.
37.0	94.2	10751.5	250.0	-48.3	99.9	235.6	41.5	34.2	23.5	334.3	999.9	99.9	999.9	46.2	62.
39.3	99.2	11438.8	225.0	-52.4	99.9	242.7	41.6	37.0	19.1	338.2	999.9	99.9	999.9	51.7	62.
42.3	104.8	12190.2	200.0	-57.7	99.9	240.1	50.0	43.4	24.9	341.4	999.9	99.9	999.9	59.1	62.
45.1	110.6	13033.1	175.0	-58.6	99.9	242.9	40.4	35.9	18.4	353.3	999.9	99.9	999.9	67.2	62.
48.4	117.0	13997.0	150.0	-59.0	99.9	239.2	43.6*	37.4	22.3	368.5	999.9	99.9	999.9	75.5	62.
52.3	124.7	15126.1	125.0	-63.0	99.9	254.8	36.2*	34.9	9.5	380.9	999.9	99.9	999.9	84.9	62.
56.8	132.5	16484.4	100.0	-68.8	99.9	231.8	19.3*	15.2	11.9	394.8	999.9	99.9	999.9	91.5	62.
61.9	140.7	18186.5	75.0	-73.0	99.9	207.5	5.3*	2.4	4.7	419.8	999.9	99.9	999.9	95.7	62.
69.8	149.5	20654.0	50.0	-61.0	99.9	31.1	4.7	-2.4	-4.0	499.8	999.9	99.9	999.9	95.6	61.
83.0	158.7	25087.3	25.0	-49.7	99.9	20.0	4.1	-1.4	-3.8	642.1	999.9	99.9	999.9	94.1	62.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 265
MIDLAND, TEX

7 MAY 1975
245 GMT

151 13. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	12.0	873.0	908.6	18.3	0.9	140.0	2.1	-1.3	1.6	300.2	312.8	4.5	31.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	12.7	955.2	900.0	21.5	6.6	172.1	3.9	-0.5	3.9	304.7	324.3	7.0	38.1	0.1	341.
1.2	14.9	1199.8	875.0	21.6	7.7	198.9	4.2	1.4	4.0	307.3	328.5	7.6	40.6	0.3	349.
2.0	16.8	1450.4	850.0	19.7	6.2	233.0	5.8	4.6	3.5	307.8	327.7	7.0	41.2	0.5	12.
2.9	19.1	1706.4	825.0	17.4	4.1	250.3	6.6	6.5	1.2	307.8	325.7	6.3	41.2	0.8	33.
3.8	21.1	1968.2	800.0	14.9	1.9	267.2	7.6	7.6	0.4	307.8	323.6	5.5	41.2	1.0	49.
4.6	23.4	2235.9	775.0	12.6	0.1	273.0	8.3	8.3	-0.4	308.0	322.4	5.0	42.1	1.4	69.
5.6	25.6	2509.9	750.0	10.1	-2.2	266.7	9.6	9.6	0.6	308.1	320.8	4.4	42.3	1.8	69.
6.7	27.9	2790.4	725.0	7.6	-4.0	252.5	12.2	11.6	3.7	308.3	319.9	3.9	43.6	2.5	72.
7.7	30.4	3078.7	700.0	5.8	-5.2	238.4	16.1	13.7	8.4	309.4	320.5	3.7	45.3	3.3	79.
8.6	32.9	3375.5	675.0	4.1	-6.2	229.6	19.7	15.0	12.8	310.7	321.4	3.6	47.0	4.4	66.
9.8	35.5	3681.4	650.0	1.7	-7.5	230.8	21.7	16.8	13.7	311.3	321.4	3.4	50.4	5.8	61.
11.0	38.0	3995.8	625.0	-1.3	-10.1	237.0	23.8	20.0	13.7	311.3	319.9	2.8	50.9	7.3	60.
12.1	40.6	4320.1	600.0	-3.8	-12.7	244.2	25.7	23.1	11.2	312.0	319.4	2.4	49.7	9.1	60.
13.4	43.3	4654.6	575.0	-6.4	-16.8	249.9	27.1	25.5	9.3	312.7	318.3	1.8	43.1	11.1	61.
14.7	46.2	5007.3	550.0	-9.4	-21.7	253.6	27.3	26.2	7.7	313.0	316.9	1.2	36.0	13.1	63.
15.7	49.1	5358.6	525.0	-11.3	-24.0	253.0	25.0	23.9	7.3	314.9	318.3	1.0	33.9	14.8	64.
17.0	52.0	5731.0	500.0	-14.3	-26.1	253.3	24.0	23.0	6.9	315.7	318.7	0.9	35.9	16.6	65.
18.5	55.1	6118.0	475.0	-16.9	-28.0	248.4	25.8	24.0	9.5	317.1	319.8	0.8	37.1	18.8	66.
19.9	58.1	6522.3	450.0	-19.1	-30.1	248.2	28.1	26.1	10.4	319.2	321.6	0.7	37.1	21.1	66.
21.3	61.6	6945.7	425.0	-22.2	-32.9	246.2	27.2	24.9	11.0	320.6	322.5	0.6	37.0	23.4	66.
22.4	65.0	7388.0	400.0	-25.8	-36.4	243.1	28.3	25.2	12.8	321.5	323.0	0.4	35.9	26.0	66.
24.4	68.4	7852.0	375.0	-29.8	-40.3	242.4	30.5	27.0	14.1	322.1	323.2	0.3	35.0	28.7	66.
26.1	72.0	8340.0	350.0	-33.2	-43.3	244.3	32.2	29.0	14.0	324.0	324.8	0.2	34.9	32.0	65.
28.0	76.0	8857.4	325.0	-36.6	-46.4	248.3	35.9	33.4	13.3	326.1	326.8	0.2	35.3	35.8	66.
30.7	80.3	9407.2	300.0	-40.9	-49.9	247.8	42.4	39.3	16.0	327.8	999.9	99.9	999.9	40.6	66.
32.1	84.5	9992.5	275.0	-45.8	-54.9	245.3	45.9	41.7	19.2	328.9	999.9	99.9	999.9	46.2	66.
34.7	89.0	10620.1	250.0	-50.5	-59.9	242.6	44.0*	39.1	20.2	331.1	999.9	99.9	999.9	53.1	66.
37.9	94.2	11332.3	225.0	-53.7	-64.9	242.0	53.2*	47.0	24.9	336.3	999.9	99.9	999.9	62.4	65.
40.9	99.5	12054.4	200.0	-58.6	-69.9	236.1	48.5*	40.3	27.1	343.2	999.9	99.9	999.9	71.3	64.
44.2	105.3	12903.5	175.0	-56.1	-69.9	243.1	45.3*	40.4	20.5	357.3	999.9	99.9	999.9	81.8	64.
47.8	111.7	13881.8	150.0	-56.4	-69.9	239.1	45.4*	38.9	23.3	373.0	999.9	99.9	999.9	91.2	63.
52.1	119.0	15029.9	125.0	-60.4	-69.9	243.2	37.2*	33.2	16.7	385.5	999.9	99.9	999.9	102.4	63.
57.3	127.3	16403.0	100.0	-66.1	-69.9	239.8	29.1*	25.2	14.6	400.1	999.9	99.9	999.9	111.7	63.
62.9	136.7	18140.0	75.0	-68.4	-69.9	198.8	64.6*	2.1	6.3	429.6	999.9	99.9	999.9	115.8	63.
72.5	146.3	21631.5	50.0	-59.7	-69.9	65.8	3.0*	-2.7	-1.2	502.9	999.9	99.9	999.9	117.0	62.
88.6	157.0	25049.7	25.0	-50.8	-69.9	58.3	10.7	-9.1	-5.6	638.7	999.9	99.9	999.9	113.2	63.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 270
EL PASO, TEX

7 MAY 1975
300 GMT

104 159. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	16.3	1193.0	875.6	16.8	-16.2	340.0	3.1	1.1	-2.9	301.3	305.1	1.2	9.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.0	16.7	1198.9	875.0	16.8	-15.7	344.4	3.3	0.9	-3.2	301.4	305.4	1.3	9.5	0.0	352.
0.7	18.1	1443.3	850.0	16.1	-7.0	999.9	99.9	99.9	99.9	303.3	311.2	2.7	19.8	999.9	999.
1.7	20.4	1697.5	825.0	13.2	-9.2	999.9	99.9	99.9	99.9	302.9	309.7	2.3	20.0	999.9	999.
2.5	22.5	1954.9	800.0	11.5	-10.6	999.9	99.9	99.9	99.9	303.7	310.0	2.1	20.1	999.9	999.
3.4	24.9	2219.0	775.0	9.7	-12.0	329.4	7.0	3.5	-6.0	304.5	310.4	2.0	20.2	0.8	164.
4.3	27.1	2489.9	750.0	7.5	-13.6	999.9	99.9	99.9	99.9	305.0	310.4	1.8	20.5	999.9	999.
5.2	29.5	2707.7	725.0	5.0	-14.4	999.9	99.9	99.9	99.9	305.2	310.5	1.7	22.9	999.9	999.
6.1	32.0	3052.7	700.0	2.8	-14.8	999.9	99.9	99.9	99.9	305.8	311.1	1.7	25.8	999.9	999.
7.0	34.5	3343.6	675.0	0.2	-15.8	999.9	99.9	99.9	99.9	306.0	311.1	1.6	28.8	999.9	999.
8.1	36.9	3646.4	650.0	-2.5	-17.8	234.9	20.6	16.8	11.8	306.3	310.7	1.4	29.6	5.2	79.
9.1	39.5	3956.5	625.0	-4.7	-17.1	232.3	22.6	17.9	13.8	307.3	312.2	1.6	37.2	6.5	74.
10.2	41.9	4276.5	600.0	-6.5	-26.8	237.4	22.4	18.9	12.1	308.7	311.0	0.7	18.4	8.0	70.
11.5	44.7	4608.0	575.0	-8.3	-29.0	246.7	21.4	19.6	8.4	310.3	312.3	0.6	17.0	9.6	68.
12.7	47.4	4951.7	550.0	-10.5	-30.6	252.7	22.9	21.8	6.8	311.7	313.5	0.5	17.1	11.2	69.
14.0	50.3	5307.8	525.0	-13.5	-33.2	254.0	24.4	23.5	6.7	312.2	313.7	0.4	17.1	13.0	69.
15.2	53.0	5676.7	500.0	-16.4	-36.0	253.0	25.1	24.0	7.3	313.0	314.2	0.3	16.5	14.9	70.
16.4	55.8	6060.8	475.0	-19.0	-38.0	254.4	26.8	25.8	7.2	314.4	315.5	0.3	16.7	16.6	70.
17.6	58.9	6460.9	450.0	-21.7	-37.6	254.1	29.0	27.9	7.9	315.9	317.1	0.3	22.0	18.7	71.
18.8	62.1	6879.7	425.0	-24.5	-38.3	253.2	29.8	29.5	8.6	317.6	318.8	0.3	26.2	21.8	71.
20.2	65.3	7318.5	400.0	-28.2	-40.9	254.1	31.5	30.3	8.6	318.3	319.2	0.3	28.2	23.3	71.
21.9	68.7	7777.6	375.0	-32.1	-44.3	247.3	33.9	31.3	13.1	319.1	319.8	0.2	28.3	26.6	71.
23.7	72.1	8260.9	350.0	-35.8	-47.6	246.3	35.5	32.5	14.3	320.3	320.9	0.1	28.4	30.4	71.
25.4	75.8	8771.8	325.0	-39.8	99.9	243.1	36.5	32.5	16.5	321.8	999.9	99.9	999.9	34.2	70.
27.3	79.7	9314.3	300.0	-44.3	99.9	243.7	41.4	37.1	18.3	322.9	999.9	99.9	999.9	38.4	66.
29.4	83.7	9893.4	275.0	-47.8	99.9	244.1	53.3	48.0	23.3	326.0	999.9	99.9	999.9	44.5	69.
31.4	87.8	10516.5	250.0	-51.8	99.9	240.4	53.1*	46.2	26.3	329.1	999.9	99.9	999.9	51.0	68.
33.7	92.4	11194.6	225.0	-55.3	99.9	236.6	52.9*	44.1	29.1	333.7	999.9	99.9	999.9	58.0	67.
36.4	97.2	11942.8	200.0	-56.2	99.9	239.9	53.2*	46.0	26.7	343.8	999.9	99.9	999.9	66.2	66.
39.4	102.4	12788.2	175.0	-56.8	99.9	238.0	47.9*	40.7	25.4	350.2	999.9	99.9	999.9	75.5	65.
42.8	108.3	13764.8	150.0	-56.1	99.9	241.8	41.4*	36.5	19.6	373.4	999.9	99.9	999.9	84.8	64.
47.4	114.7	14918.5	125.0	-56.7	99.9	238.7	39.6*	33.9	20.6	392.4	999.9	99.9	999.9	94.4	64.
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 327
NASHVILLE, TENN

7 MAY 1975
215 GMT

161 13. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.3	180.0	991.6	17.8	17.3	120.0	1.5	-1.3	0.7	293.3	326.1	12.7	97.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
0.5	7.7	325.9	975.0	19.3	18.4	999.9	99.9	99.9	99.9	296.5	332.5	13.8	94.2	999.9	999.9
1.4	5.7	550.0	950.0	18.6	17.3	999.9	99.9	99.9	99.9	297.8	332.6	13.3	92.5	999.9	999.9
2.1	11.5	775.5	925.0	18.7	15.5	215.7	7.8	4.6	6.4	300.0	332.3	12.1	82.1	0.6	6.
3.0	13.6	1015.3	900.0	18.4	11.8	226.0	6.6	4.8	4.6	301.8	328.1	9.7	65.4	0.9	20.
3.8	15.6	1256.5	875.0	16.5	9.8	224.9	7.1	5.0	5.0	302.1	326.0	8.7	64.6	1.2	26.
4.6	17.8	1502.6	850.0	14.4	8.1	225.0	7.6	5.7	5.0	302.3	324.3	8.0	66.0	1.6	32.
5.4	20.1	1754.4	825.0	12.6	6.8	235.2	8.9	7.3	5.1	302.9	323.8	7.6	67.8	2.0	35.
6.2	22.1	2012.1	800.0	10.7	5.8	234.8	10.3	8.4	5.9	303.5	323.7	7.3	71.5	2.4	40.
7.2	24.5	2276.3	775.0	8.4	4.8	229.5	10.3	7.9	6.7	303.8	323.4	7.0	78.1	3.0	42.
8.2	26.6	2546.7	750.0	6.0	4.7	221.0	9.9	6.5	7.5	304.0	324.0	7.2	91.5	3.6	43.
9.2	29.1	2824.1	725.0	4.3	3.4	212.0	9.2	4.8	7.8	305.0	324.1	6.8	94.3	4.2	42.
10.3	31.7	3119.5	700.0	2.4	1.4	209.4	8.0	3.9	6.9	306.0	323.2	6.1	92.7	4.7	40.
11.3	34.2	3403.8	675.0	2.3	-3.1	215.6	8.3	4.8	6.8	308.7	321.9	4.5	67.5	5.2	39.
12.4	36.7	3708.4	650.0	0.6	-2.5	232.1	8.2	6.5	5.0	310.3	324.6	4.9	79.7	5.8	40.
13.4	39.4	4022.7	625.0	-1.5	-4.1	252.4	8.0	7.6	2.4	311.3	324.6	4.5	82.3	6.2	41.
14.5	42.0	4346.5	600.0	-4.2	-8.0	266.3	8.3	8.3	0.5	311.7	322.2	3.5	75.0	6.6	44.
15.8	45.0	4680.5	575.0	-7.2	-9.3	271.4	10.2	10.2	-0.2	311.9	321.8	3.3	84.7	7.1	48.
16.9	48.0	5026.7	550.0	-8.4	-14.9	269.9	11.7	11.7	0.0	314.4	321.1	2.2	59.1	7.7	52.
18.1	50.9	5386.3	525.0	-10.7	-21.9	271.7	12.7	12.7	-0.4	315.7	319.8	1.3	38.9	8.4	56.
19.5	54.1	5760.4	500.0	-12.4	-30.5	276.4	13.0	12.9	-1.4	317.9	320.0	0.6	20.4	9.3	60.
20.9	57.3	6150.3	475.0	-14.9	-34.2	277.6	15.9	15.8	-2.1	319.6	321.2	0.5	18.8	10.3	64.
22.3	60.9	6557.1	450.0	-18.1	-43.9	281.4	17.9	17.5	-3.5	320.5	321.1	0.2	8.2	11.5	68.
23.8	64.4	6982.5	425.0	-20.5	-43.4	282.3	17.6	17.2	-3.7	322.6	323.3	0.2	10.8	12.9	72.
25.4	68.0	7427.9	400.0	-23.9	-29.4	276.4	14.1	14.1	-1.6	324.0	326.8	0.8	60.1	14.1	75.
27.1	71.8	7895.4	375.0	-27.8	-43.2	275.2	15.6	15.5	-1.4	324.8	325.6	0.2	21.1	15.6	77.
28.9	76.0	8387.5	350.0	-31.2	-39.9	276.5	18.9	18.8	-2.1	326.6	327.8	0.3	41.6	17.3	79.
30.7	80.3	8908.8	325.0	-34.9	-55.4	278.5	18.6	18.4	-2.8	328.4	328.7	0.1	10.3	19.3	81.
32.9	84.8	9461.9	300.0	-39.2	-50.3	276.7	16.5	16.4	-1.9	330.1	330.6	0.1	29.3	21.7	83.
35.2	89.6	10051.4	275.0	-44.7	99.9	279.1	17.1	16.9	-2.7	330.5	999.9	99.9	999.9	23.7	84.
37.5	94.8	10681.9	250.0	-49.8	99.9	277.9	17.9	17.8	-2.5	332.0	999.9	99.9	999.9	26.1	85.
40.0	100.2	11362.2	225.0	-55.9	99.9	274.9	18.6	18.6	-1.6	332.9	999.9	99.9	999.9	28.8	86.
42.9	106.0	12101.4	200.0	-61.3	99.9	275.6	25.9	25.7	-2.5	335.7	999.9	99.9	999.9	32.4	87.
46.1	112.3	12921.8	175.0	-65.7	99.9	285.8	36.8	35.4	-10.0	341.6	999.9	99.9	999.9	38.5	89.
49.4	119.3	13861.4	150.0	-65.6	99.9	308.2	35.2	27.7	-21.8	357.1	999.9	99.9	999.9	45.2	94.
53.9	127.0	14972.0	125.0	-62.7	99.9	297.5	25.6	22.7	-11.8	381.4	999.9	99.9	999.9	53.0	98.
59.2	135.3	16345.5	100.0	-61.3	99.9	308.6	19.8	15.5	-12.3	409.2	999.9	99.9	999.9	59.9	100.
65.5	143.3	18119.3	75.0	-62.6	99.9	311.8	6.4	4.7	-4.2	441.8	999.9	99.9	999.9	64.4	102.
75.1	152.3	20630.3	50.0	-60.5	99.9	327.3	2.9	1.6	-2.4	501.0	999.9	99.9	999.9	66.1	104.
90.4	161.3	25046.8	25.0	-50.9	99.9	334.6	3.4	1.5	-3.1	638.6	999.9	99.9	999.9	65.1	105.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 349
MONETTE, MO

7 MAY 1975
348 GMT

127 112. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	8.4	438.0	957.3	17.7	16.0	10.0	4.2	-0.7	-4.1	296.1	327.8	12.1	90.0	3.0	0.
99.9	99.9	99.9	1030.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.2	9.1	574.1	950.0	19.9	17.5	999.9	99.9	99.9	99.9	299.2	334.6	13.4	85.6	999.9	999.
1.0	11.2	735.6	925.0	20.6	19.2	999.9	99.9	99.9	99.9	302.5	343.3	15.3	91.3	999.9	999.
1.9	13.6	972.9	900.0	19.3	17.7	999.9	99.9	99.9	99.9	303.3	341.8	14.3	90.4	999.9	999.
2.6	15.8	1215.9	875.0	18.8	16.7	999.9	99.9	99.9	99.9	305.2	342.6	13.8	87.5	999.9	999.
3.4	18.3	1464.8	850.0	16.7	13.4	999.9	99.9	99.9	99.9	305.2	338.6	11.5	81.0	999.9	999.
4.9	20.7	1719.1	825.0	15.2	10.5	192.2	13.8	2.9	13.5	305.9	332.9	9.8	73.9	2.1	22.
4.6	23.2	1975.4	800.0	13.1	7.6	186.6	13.6	1.6	13.5	306.2	329.1	8.2	69.2	2.6	23.
5.3	25.7	2246.0	775.0	11.2	7.1	185.4	13.3	1.3	13.2	307.0	330.0	8.2	75.6	3.2	17.
6.0	28.3	2519.1	750.0	8.5	5.7	185.4	13.1	1.2	13.0	306.8	328.5	7.7	82.7	3.7	16.
6.6	31.3	2798.7	725.0	6.5	3.6	185.0	12.0	1.1	12.0	307.5	327.0	6.9	81.7	4.2	14.
7.3	33.8	3086.1	700.0	4.4	2.0	186.6	10.9	1.3	10.8	308.2	326.3	6.3	84.1	4.6	13.
8.1	36.4	3381.7	675.0	2.3	1.0	194.3	10.0	2.5	9.7	309.0	326.5	6.1	91.2	5.1	13.
9.0	39.3	3696.1	650.0	0.1	-1.1	213.0	9.6	5.2	8.1	309.8	325.6	5.5	91.6	5.6	13.
10.0	42.0	4000.5	625.0	-0.6	-1.7	224.6	12.8	9.0	9.1	312.5	328.4	5.4	91.8	6.2	17.
11.2	45.1	4325.9	600.0	-3.5	-4.6	235.3	17.4	14.3	9.9	312.7	326.2	4.6	92.1	7.2	21.
12.8	48.3	4658.1	575.0	-9.8	-29.7	251.2	23.3	22.1	7.5	308.6	310.4	0.6	17.7	8.8	31.
14.1	51.2	4999.3	550.0	-12.2	-35.5	257.2	21.8	21.2	4.8	309.6	310.8	0.3	12.2	10.1	37.
15.9	54.4	5354.1	525.0	-12.5	-37.5	265.9	21.5	21.4	1.6	313.4	314.5	0.3	10.2	11.9	46.
17.9	57.6	5727.6	500.0	-13.9	-37.3	268.3	15.0	15.0	0.4	317.2	318.3	0.3	11.2	13.5	52.
18.9	61.0	6117.3	475.0	-14.4	-38.0	268.6	13.9	13.9	0.3	320.1	321.2	0.3	11.4	14.6	54.
19.8	64.7	6524.6	450.0	-17.5	-40.3	263.7	14.7	14.6	1.6	321.2	322.1	0.2	11.6	14.7	56.
20.6	68.1	6950.6	425.0	-20.4	-44.3	247.4	19.3	17.8	7.4	322.8	323.4	0.2	9.6	15.6	57.
21.5	71.7	7396.7	400.0	-23.6	-46.6	238.9	20.8	17.8	10.7	324.2	324.7	0.1	9.9	16.7	57.
22.6	75.7	7866.1	375.0	-26.6	-47.3	242.6	17.7	15.7	8.2	326.3	326.8	0.1	12.1	18.0	57.
24.0	79.3	8359.4	350.0	-31.0	-48.4	247.8	18.8	17.4	7.1	326.9	327.4	0.1	16.0	19.4	58.
26.0	84.3	8880.8	325.0	-34.7	-51.4	244.4	31.4	28.3	13.6	328.7	329.1	0.1	16.3	22.2	59.
28.3	88.4	9435.5	300.0	-38.8	99.9	238.4	31.7	27.0	16.6	330.6	999.9	99.9	999.9	26.5	59.
30.0	93.2	10026.4	275.0	-43.7	99.9	236.5	32.0	26.7	17.7	332.0	999.9	99.9	999.9	29.9	59.
31.5	98.0	10659.9	250.0	-48.6	99.9	233.6	35.1	28.2	20.8	333.8	999.9	99.9	999.9	32.9	59.
33.1	103.4	11346.3	225.0	-53.1	99.9	223.1	45.3	30.9	33.0	337.2	999.9	99.9	999.9	36.7	58.
35.9	109.3	12055.1	200.0	-59.4	99.9	216.7	44.2	26.5	35.5	338.7	999.9	99.9	999.9	43.8	54.
39.2	115.4	12923.9	175.0	-63.3	99.9	227.3	42.5	31.2	28.8	345.4	999.9	99.9	999.9	51.9	52.
41.8	122.3	13859.8	150.0	-68.1	99.9	249.0	43.5	40.4	16.3	352.8	999.9	99.9	999.9	58.6	53.
44.8	129.7	14982.1	125.0	-58.7	99.9	273.0	25.6	25.6	-1.3	388.7	999.9	99.9	999.9	65.5	55.
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 353
OKLAHOMA CITY, OKLA

7 MAY 1975
300 GMT

147 43. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	9.5	392.0	960.4	16.7	8.4	180.0	2.6	0.0	2.6	294.2	313.5	7.2	58.0	0.0	0.
09.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.4	10.4	496.5	950.0	23.0	3.2	196.9	9.3	2.7	8.9	301.2	315.5	5.1	27.3	0.3	10.
1.3	12.4	718.6	925.0	22.7	3.1	206.0	10.7	4.7	9.6	303.3	318.0	5.2	27.6	0.7	16.
2.1	14.7	956.1	900.0	21.2	1.0	216.7	11.8	7.0	9.5	304.0	317.1	4.6	26.2	1.3	23.
3.1	16.9	1198.6	875.0	18.7	-1.0	222.7	10.9	7.4	8.0	303.8	315.5	4.1	26.3	1.9	29.
4.1	19.3	1446.0	850.0	16.4	-2.4	236.0	11.3	9.3	6.3	303.9	314.8	3.8	27.3	2.6	35.
5.0	21.5	1699.8	825.0	14.1	-3.7	242.2	10.6	9.4	4.9	304.0	314.3	3.5	28.9	3.1	39.
6.0	24.0	1957.0	800.0	11.6	-5.6	253.4	8.8	8.4	2.5	303.9	313.1	3.1	29.4	3.7	43.
7.0	26.4	2221.4	775.0	9.3	-6.9	243.7	11.4	10.2	5.0	304.2	312.9	2.9	31.1	4.2	47.
8.0	29.0	2491.7	750.0	6.7	-8.3	245.4	14.7	13.3	6.1	304.2	312.2	2.7	33.4	4.9	44.
9.0	31.7	2769.2	725.0	4.8	-10.7	242.7	18.2	16.2	8.4	305.0	312.0	2.3	31.4	5.9	52.
10.0	34.3	3054.5	700.0	3.2	-13.1	235.9	20.1	16.7	11.3	306.3	312.4	2.0	28.9	7.0	53.
11.1	37.0	3348.3	675.0	2.6	-16.2	230.9	20.7	16.1	13.1	308.7	313.7	1.6	23.4	8.4	53.
12.3	39.8	3653.9	650.0	2.3	-18.5	231.1	20.8	16.2	12.0	311.8	316.1	1.4	19.6	9.9	53.
13.4	42.4	3969.9	625.0	0.5	-20.1	233.3	20.3	16.3	12.1	313.1	317.1	1.2	19.5	11.2	53.
14.5	45.4	4295.6	600.0	-2.4	-22.2	231.9	19.1	15.0	11.8	313.4	316.9	1.1	20.0	12.6	53.
15.7	48.5	4631.6	575.0	-5.0	-24.0	230.6	19.0	14.7	12.0	314.2	317.3	0.9	20.8	14.0	53.
16.8	51.4	4979.0	550.0	-7.9	-26.3	231.4	20.8	16.3	13.0	314.8	317.5	0.8	20.9	15.3	52.
18.0	54.6	5338.6	525.0	-10.8	-28.8	231.6	21.0	16.5	13.1	315.4	317.7	0.7	21.1	16.7	52.
19.2	57.6	5711.4	500.0	-14.0	-30.5	226.9	23.3	17.0	15.9	316.0	318.0	0.6	23.0	18.4	52.
20.6	61.0	6098.1	475.0	-17.2	-33.2	227.3	22.0	16.2	14.9	316.7	318.3	0.5	23.2	20.2	52.
21.9	64.7	6501.5	450.0	-20.3	-35.8	227.7	23.3	17.3	15.7	317.7	319.0	0.4	23.4	22.1	51.
23.5	68.1	6922.4	425.0	-23.4	-38.4	232.0	22.6	17.8	13.9	319.0	320.2	0.3	23.5	24.0	51.
25.2	71.7	7363.9	400.0	-26.0	-40.6	237.5	20.4	17.2	10.9	321.2	322.1	0.3	23.7	26.5	51.
27.1	75.7	7827.6	375.0	-30.0	-43.1	237.0	26.4	22.1	14.4	321.8	322.7	0.2	26.4	29.1	52.
28.9	79.9	8313.9	350.0	-34.9	-47.0	240.4	21.0	18.3	10.4	321.7	322.2	0.2	27.4	31.9	53.
31.1	84.0	8827.5	325.0	-38.0	-50.3	233.3	27.9	22.4	10.7	324.3	324.7	0.1	25.8	34.8	53.
33.3	88.3	9375.8	300.0	-41.2	-53.9	234.5	33.7	27.5	19.6	327.4	999.9	99.9	999.9	38.5	53.
35.6	93.2	9961.6	275.0	-45.4	-57.9	232.0	37.6	29.6	23.2	329.5	999.9	99.9	999.9	43.2	53.
38.0	98.0	10592.2	250.0	-49.3	-61.9	236.0	30.6	30.4	20.5	332.8	999.9	99.9	999.9	48.7	53.
40.6	103.3	11276.2	225.0	-53.2	-65.9	233.6	38.4	30.9	22.9	336.9	999.9	99.9	999.9	54.8	53.
43.7	109.0	12027.9	200.0	-57.0	-69.9	236.9	36.5	30.6	19.9	342.5	999.9	99.9	999.9	61.9	53.
47.1	115.2	12869.4	175.0	-59.0	-71.9	236.1	34.7*	28.8	19.4	352.6	999.9	99.9	999.9	68.7	54.
51.2	121.8	13835.6	150.0	-59.2	-71.9	242.0	32.0*	28.3	15.0	368.1	999.9	99.9	999.9	77.8	54.
55.5	129.0	14978.6	125.0	-59.5	-71.9	239.1	30.6*	26.2	15.7	387.2	999.9	99.9	999.9	85.4	55.
60.9	137.0	16363.6	100.0	-64.1	-71.9	239.6	28.8*	24.7	14.5	403.9	999.9	99.9	999.9	93.2	55.
67.5	144.5	18140.2	75.0	-62.0	-71.9	153.2	7.4*	-3.3	6.6	443.1	999.9	99.9	999.9	96.2	55.
77.2	152.7	20624.1	50.0	-60.9	-71.9	43.4	5.5	-3.8	-4.0	500.0	999.9	99.9	999.9	95.3	55.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

144

STATION NO. 354
TINKER AFB, OKLA

7 MAY 1975
300 GMT

122 106. 0

TIME MIN	CNTCT	HEIGHT GPN	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPFED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	8.8	393.0	960.1	19.2	8.2	220.0	2.0	1.3	1.5	290.7	316.1	7.2	49.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.4	9.7	495.2	950.0	24.0	2.1	17.8	9.5	-2.9	-9.1	302.2	315.7	4.7	24.2	0.3	191.
1.4	11.6	717.7	925.0	23.0	-0.3	21.6	10.2	-3.7	-6.6	303.4	315.0	4.1	21.3	0.8	196.
2.3	13.9	955.1	900.0	21.1	-1.9	33.9	10.2	-5.7	-8.5	303.8	314.6	3.7	21.5	1.3	200.
3.3	15.9	1197.6	875.0	19.2	-3.3	43.0	12.1	-8.3	-8.8	304.2	314.2	3.4	21.6	2.7	207.
4.1	18.1	1445.4	850.0	17.1	-4.9	54.2	13.6	-11.0	-7.9	304.5	313.7	3.1	21.7	2.6	212.
5.1	20.3	1698.6	825.0	14.7	-6.5	63.8	11.5	-10.3	-5.1	304.6	313.0	2.8	22.4	3.3	218.
6.1	22.5	1957.5	800.0	12.4	-7.7	71.6	11.7	-11.1	-3.7	304.7	312.7	2.7	23.8	3.9	223.
7.1	24.9	2222.2	775.0	9.8	-9.8	67.9	13.1	-12.1	-4.9	304.7	311.6	2.3	23.9	4.6	227.
8.0	27.1	2493.4	750.0	7.8	-10.6	62.5	16.2	-14.4	-7.5	305.4	312.2	2.3	25.8	5.4	230.
9.1	29.6	2772.2	725.0	6.5	-13.5	54.9	20.2	-16.5	-11.6	306.8	312.5	1.9	22.3	6.5	232.
10.2	32.1	3059.3	700.0	5.0	-14.7	46.2	21.5	-15.5	-14.9	308.3	313.7	1.7	22.4	8.0	232.
11.3	34.8	3354.9	675.0	2.8	-18.5	44.8	21.9	-15.4	-15.6	309.0	313.1	1.3	18.9	9.3	230.
12.3	37.2	3660.0	650.0	2.5	-23.2	46.4	22.5	-16.3	-15.5	311.9	314.8	0.9	12.9	10.6	230.
13.3	39.9	3975.8	625.0	0.9	-24.3	47.3	22.1	-16.3	-15.0	313.5	316.3	0.8	13.0	12.0	229.
14.5	42.4	4302.4	600.0	-1.3	-25.9	50.0	20.8	-15.9	-13.4	314.6	317.2	0.8	13.3	13.5	229.
15.7	45.3	4639.7	575.0	-3.8	-27.8	49.2	20.5	-15.5	-13.4	315.5	317.8	0.7	13.5	15.1	229.
17.0	48.3	4988.6	550.0	-6.8	-29.9	51.5	22.2	-17.4	-13.8	316.0	318.0	0.6	13.8	16.7	230.
18.2	51.0	5249.4	525.0	-9.6	-32.0	52.1	23.0	-18.2	-14.1	316.9	318.6	0.5	14.1	18.3	230.
19.4	54.1	5723.6	500.0	-13.2	-33.1	50.8	24.9	-19.3	-15.8	317.0	318.6	0.5	16.8	19.9	230.
20.6	57.1	6112.2	475.0	-15.9	-35.0	52.7	23.2	-18.4	-14.0	318.2	319.7	0.4	17.4	21.8	230.
21.9	60.6	6516.9	450.0	-19.6	-36.9	54.1	23.0	-18.6	-13.5	318.6	319.9	0.4	19.7	23.6	230.
23.3	64.0	6939.1	425.0	-22.5	-39.2	55.2	23.7	-19.5	-13.5	320.2	321.2	0.3	19.9	25.5	231.
24.8	67.3	7382.4	400.0	-25.1	-42.3	54.2	24.4	-19.8	-14.3	322.3	323.1	0.2	18.3	27.7	231.
26.5	70.9	7947.2	375.0	-29.5	-44.4	55.8	25.8	-21.4	-14.5	322.5	323.2	0.2	21.7	30.3	231.
28.1	74.7	8335.9	350.0	-33.5	-47.8	53.8	21.6	-17.5	-12.8	323.5	324.0	0.1	22.0	32.4	232.
29.6	78.9	8851.9	325.0	-37.1	-50.8	52.6	23.2	-18.4	-14.1	325.5	325.9	0.1	22.3	34.5	232.
31.2	82.8	9401.8	300.0	-40.4	99.9	53.0	31.5	-25.2	-19.0	328.5	999.9	99.9	999.9	37.2	232.
32.9	87.2	9990.5	275.0	-43.8	99.9	52.0	34.0	-26.8	-20.9	331.8	999.9	99.9	999.9	40.5	232.
34.4	92.0	10624.8	250.0	-47.9	99.9	52.3	40.4	-32.0	-24.7	334.9	999.9	99.9	999.9	43.5	232.
36.0	97.0	11313.2	225.0	-52.1	99.9	53.4	39.8	-31.9	-23.7	338.7	999.9	99.9	999.9	47.6	232.
37.9	102.5	12067.7	200.0	-56.3	99.9	56.0	40.0	-33.2	-22.4	343.7	999.9	99.9	999.9	52.8	232.
40.5	108.8	12910.4	175.0	-58.7	99.9	57.0	45.1	-37.8	-24.5	353.1	999.9	99.9	999.9	58.9	233.
43.4	115.4	13883.0	150.0	-57.8	99.9	57.0	30.0	-30.2	-19.6	370.5	999.9	99.9	999.9	65.5	233.
46.7	123.0	15026.0	125.0	-60.2	99.9	61.4	29.0	-25.5	-13.9	385.9	999.9	99.9	999.9	71.1	233.
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 363
AMARILLO, TEX

7 MAY 1975
215 GMT

148 15. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	L COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	12.9	1055.7	882.7	14.3	-9.7	280.0	6.2	6.1	-1.1	298.2	304.3	2.1	18.0	0.3	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
0.3	13.6	1105.6	875.0	16.2	-2.9	260.4	15.3	15.1	2.6	301.0	311.2	3.5	26.8	0.3	105.
1.1	15.6	1415.5	850.0	15.0	-4.0	264.8	14.5	14.5	1.3	302.3	312.7	3.4	26.8	0.9	91.
2.1	17.6	1666.8	825.0	12.5	-6.1	267.4	14.3	14.2	0.6	302.2	310.8	3.0	26.9	1.7	89.
3.1	19.8	1923.5	800.0	10.1	-8.1	265.4	15.1	15.1	1.2	302.2	309.3	2.6	26.9	2.5	88.
4.1	21.7	2186.2	775.0	7.8	-9.6	255.4	14.0	13.5	3.5	302.5	309.5	2.4	27.9	3.4	86.
5.0	24.0	2455.1	750.0	5.5	-11.4	250.3	15.3	14.4	5.2	302.8	309.2	2.1	28.3	4.2	84.
5.9	26.1	2731.2	725.0	3.2	-13.3	237.0	14.6	12.3	8.0	303.2	308.9	1.9	28.5	5.0	80.
7.0	28.4	3014.5	700.0	0.9	-13.9	226.2	16.3	11.7	11.3	303.7	309.3	1.9	31.8	5.9	76.
8.1	30.8	3305.6	675.0	-1.2	-14.1	224.5	20.4	14.3	14.5	304.6	310.3	1.9	36.6	6.9	72.
9.3	33.4	3676.1	650.0	-1.7	-19.1	232.7	22.8	18.2	13.8	307.2	311.2	1.3	24.9	8.3	66.
10.2	35.8	3917.1	625.0	-3.8	-21.6	237.6	22.6	19.0	12.1	308.2	311.6	1.1	23.5	9.7	65.
11.4	38.4	4237.9	600.0	-6.0	-23.9	236.6	24.0	20.1	13.2	309.2	312.2	0.9	22.7	11.3	64.
12.5	40.9	4570.2	575.0	-7.4	-25.2	238.6	24.8	21.2	12.9	311.4	314.2	0.9	22.5	12.8	63.
13.7	43.5	4914.8	550.0	-10.0	-27.3	242.8	25.4	22.6	11.6	312.2	314.6	0.7	22.6	14.7	63.
15.1	46.6	5271.8	525.0	-12.7	-29.5	243.9	25.9	23.2	11.4	313.2	315.3	0.6	22.7	16.8	63.
16.3	49.6	5642.2	500.0	-15.4	-31.9	240.4	27.3	23.7	13.5	314.2	316.0	0.5	22.9	18.8	63.
17.7	52.5	6027.2	475.0	-18.5	-33.7	239.5	30.6	26.4	15.5	315.1	316.7	0.5	24.8	21.0	63.
18.9	55.2	6428.6	450.0	-21.0	-35.7	236.1	30.6	25.4	17.1	316.8	318.2	0.4	25.3	23.5	62.
20.4	58.4	6847.6	425.0	-24.7	-38.8	235.7	31.9	26.4	18.0	317.3	318.4	0.3	25.4	26.0	61.
21.9	61.7	7287.6	400.0	-26.7	-39.8	235.5	29.6	24.4	16.7	320.3	321.3	0.3	27.5	29.0	61.
23.6	65.2	7749.5	375.0	-30.9	-42.4	235.9	38.9	32.2	21.8	320.6	321.4	0.2	31.0	31.6	60.
25.2	68.4	8236.2	350.0	-34.0	-45.6	231.4	26.6	20.8	16.6	322.8	323.5	0.2	29.7	35.8	60.
26.9	72.0	8750.5	325.0	-38.3	-48.6	237.9	33.5	28.4	17.8	323.8	324.3	0.1	32.7	38.0	59.
28.8	76.2	9295.1	300.0	-43.5	99.9	236.8	39.8	33.3	21.8	324.0	999.9	99.9	999.9	43.7	59.
30.5	80.3	9873.0	275.0	-48.5	99.9	233.6	27.3	21.9	16.2	325.0	999.9	99.9	999.9	46.4	59.
32.6	84.6	10496.8	250.0	-51.6	99.9	236.1	29.1	24.1	16.2	329.3	999.9	99.9	999.9	49.6	59.
34.9	89.2	11174.9	225.0	-54.8	99.9	241.0	43.4*	38.0	21.0	334.6	999.9	99.9	999.9	55.5	59.
37.5	94.2	11927.6	200.0	-55.4	99.9	240.5	33.6*	29.2	16.6	345.0	999.9	99.9	999.9	60.4	59.
40.3	99.5	12779.8	175.0	-55.3	99.9	234.8	35.5*	29.0	20.4	358.7	999.9	99.9	999.9	66.9	59.
43.5	105.5	13767.4	150.0	-54.0	99.9	247.1	31.2*	28.7	12.2	377.0	999.9	99.9	999.9	73.0	59.
47.1	112.3	14924.9	125.0	-58.6	99.9	242.7	20.8*	18.5	9.5	388.8	999.9	99.9	999.9	79.2	59.
51.6	120.3	16321.0	100.0	-61.5	99.9	223.9	26.5*	18.4	19.1	409.0	999.9	99.9	999.9	84.7	59.
57.1	130.0	18107.8	75.0	-65.1	99.9	220.1	9.5*	6.1	7.3	436.4	999.9	99.9	999.9	88.8	58.
64.8	141.0	20611.1	50.0	-60.2	99.9	65.8	9.0	-8.2	-3.7	501.7	999.9	99.9	999.9	91.4	57.
76.9	154.0	25001.4	25.0	-53.0	99.9	20.7	3.2	-1.1	-3.0	632.2	999.9	99.9	999.9	89.1	57.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 365
ALBUQUERQUE, N MEX

7 MAY 1975
215 GMT

137 18. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	20.1	1619.0	830.8	10.9	-11.8	320.0	7.2	4.0	-5.5	299.8	305.3	1.9	19.0	0.1	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.2	20.5	1677.6	825.0	10.7	-10.2	319.0	10.1	6.6	-7.6	300.2	306.6	2.2	22.3	0.2	54.
0.9	22.5	1633.0	800.0	8.8	-8.7	314.6	14.3	17.2	-10.0	300.8	308.1	2.5	28.0	0.7	137.
1.7	24.7	2194.4	775.0	6.4	-10.4	305.9	14.5	11.8	-8.5	301.0	307.5	2.2	28.7	1.4	133.
2.6	26.9	2462.0	750.0	4.0	-12.2	299.1	13.0	11.3	-6.3	301.2	307.1	2.7	29.3	2.2	137.
3.4	29.3	2736.3	725.0	1.3	-13.8	295.2	12.6	11.4	-5.4	301.1	306.6	1.8	31.4	2.8	127.
4.3	31.7	3017.4	700.0	-1.4	-15.2	290.3	12.9	12.1	-4.5	301.2	306.2	1.7	33.8	3.4	124.
5.1	34.2	3305.8	675.0	-4.1	-16.6	287.0	12.6	12.0	-3.7	301.3	305.9	1.5	36.8	4.0	122.
6.0	36.6	3602.1	650.0	-6.8	-18.0	279.1	12.2	12.1	-1.9	301.5	305.8	1.4	40.4	4.6	119.
7.0	39.2	3906.9	625.0	-9.2	-18.9	261.8	14.0	13.8	2.0	302.0	306.2	1.4	45.2	5.4	115.
7.9	41.7	4221.3	600.0	-11.6	-20.2	244.1	15.2	13.6	6.6	302.9	306.8	1.3	48.7	6.0	110.
8.9	44.3	4546.1	575.0	-14.2	-21.7	228.3	16.6	12.4	11.1	303.4	307.0	1.2	53.0	6.6	103.
9.8	47.1	4881.6	550.0	-16.9	-23.0	218.1	18.2	11.2	14.3	304.1	307.5	1.1	59.3	7.1	96.
10.7	50.1	5229.3	525.0	-19.4	-24.4	221.8	20.9	13.9	15.6	305.2	308.4	1.0	64.1	7.7	90.
11.7	52.9	5590.2	500.0	-22.1	-26.5	232.9	24.1	19.2	14.6	306.1	308.4	0.7	56.1	8.6	84.
12.6	55.9	5964.8	475.0	-25.7	-31.3	244.5	28.3	25.6	12.2	306.1	308.0	0.6	59.0	10.0	80.
13.9	59.0	6355.6	450.0	-27.3	-36.1	250.3	34.8	32.2	11.7	308.9	310.2	0.4	42.5	12.4	78.
15.4	62.3	6766.2	425.0	-28.8	-41.4	250.5	41.7	39.3	13.9	312.1	312.9	0.2	28.1	15.8	76.
16.9	65.6	7197.9	400.0	-31.6	-43.8	250.0	44.9	42.2	15.3	313.9	314.6	0.2	28.3	19.8	75.
19.6	69.1	7652.4	375.0	-33.5	-46.5	246.7	48.0	44.1	19.0	317.2	317.7	0.2	25.6	24.3	74.
20.4	72.7	8133.7	350.0	-36.7	-49.2	245.5	48.5	44.2	20.0	319.2	319.7	0.1	25.8	29.6	73.
22.2	76.6	8644.2	325.0	-39.9	99.9	246.4	49.0	44.9	19.0	321.7	999.9	99.9	999.9	34.9	72.
24.2	80.6	9186.7	300.0	-43.8	99.9	245.7	50.0*	45.5	20.6	323.6	999.9	99.9	999.9	40.8	71.
26.2	84.8	9765.2	275.0	-48.3	99.9	243.3	46.9*	41.9	21.1	325.3	999.9	99.9	999.9	46.7	70.
28.4	89.2	10389.7	250.0	-49.2	99.9	243.0	48.9*	43.5	22.2	332.9	999.9	99.9	999.9	53.1	69.
31.1	94.2	11077.4	225.0	-51.2	99.9	239.6	33.7*	29.1	17.1	340.0	999.9	99.9	999.9	59.3	68.
34.6	99.2	11845.4	200.0	-49.7	99.9	242.6	36.0*	31.9	16.6	354.1	999.9	99.9	999.9	66.9	68.
38.2	104.8	12722.5	175.0	-50.4	99.9	234.0	24.6*	19.9	14.5	366.7	999.9	99.9	999.9	72.8	57.
42.7	111.0	13724.8	150.0	-53.1	99.9	239.3	18.2*	15.7	9.3	378.6	999.9	99.9	999.9	78.5	60.
47.0	117.8	14889.3	125.0	-56.8	99.9	224.1	18.9*	13.2	13.6	392.2	999.9	99.9	999.9	84.0	65.
52.2	125.8	16306.1	100.0	-57.1	99.9	241.2	30.3*	26.5	14.6	417.4	999.9	99.9	999.9	91.5	64.
58.3	134.7	18108.2	75.0	-61.3	99.9	202.3	6.1*	2.3	5.7	444.3	999.9	99.9	999.9	98.3	63.
67.4	143.7	20638.3	50.0	-58.9	99.9	143.9	4.8	-2.8	3.8	504.7	999.9	99.9	999.9	98.2	63.
82.2	153.3	25042.2	25.0	-54.0	99.9	344.2	3.4	0.9	-3.3	629.7	999.9	99.9	999.9	96.1	63.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 433
SALEM, ILL.

7 MAY 1975
300 GMT

137 62. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.4	175.0	990.0	19.7	17.7	50.0	3.6	-2.8	-2.3	295.4	329.2	13.0	88.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.4	6.5	306.9	975.0	19.2	16.3	10.2	3.1	-0.6	-3.1	296.1	327.7	12.0	83.0	0.2	185.
1.0	6.5	530.4	950.0	17.6	14.6	17.3	1.8	-0.5	-1.7	296.6	325.8	11.1	82.2	0.2	167.
1.9	10.5	759.0	925.0	18.0	11.5	184.8	2.7	0.2	2.7	299.0	324.0	9.3	66.3	0.2	191.
2.6	12.5	554.0	900.0	17.8	9.7	179.5	2.9	-0.0	2.9	301.0	324.1	8.5	59.1	0.1	210.
3.4	14.7	1234.7	875.0	16.7	8.5	194.1	3.2	0.8	3.1	302.2	324.1	8.0	58.4	0.1	314.
4.2	16.6	1441.3	850.0	15.3	6.9	209.1	3.2	1.6	2.8	303.2	323.7	7.4	57.2	0.2	14.
5.1	18.9	1733.8	825.0	13.4	5.4	193.3	2.5	0.6	2.4	303.7	322.8	6.9	58.3	0.4	14.
5.8	21.0	1591.9	800.0	10.7	4.2	215.4	2.8	1.6	2.3	303.4	321.5	6.5	64.0	0.5	15.
6.6	23.3	2256.3	775.0	9.3	3.7	262.5	4.7	4.7	0.6	304.6	322.8	6.5	68.4	0.6	26.
7.5	28.5	2528.0	750.0	7.6	2.9	269.3	7.4	7.4	0.1	305.6	323.5	6.3	72.4	0.8	50.
8.4	27.8	2806.7	725.0	5.8	2.9	266.1	9.3	9.2	0.6	306.6	325.1	6.5	81.6	1.2	63.
9.3	30.3	3093.8	700.0	4.2	1.7	274.0	11.3	11.2	-0.8	308.0	325.7	6.2	83.5	1.7	70.
10.2	32.8	3385.8	675.0	3.4	-1.9	285.7	13.9	13.4	-3.8	310.1	324.5	4.9	68.1	2.4	79.
11.1	35.4	3695.2	650.0	0.9	-3.0	292.7	16.3	15.0	-6.3	310.6	324.5	4.7	75.3	3.1	87.
12.1	37.9	4009.4	625.0	-1.2	-5.1	298.7	18.0	15.8	-8.6	311.6	324.1	4.2	74.8	4.0	93.
13.0	40.5	4334.2	600.0	-3.3	-9.0	302.6	18.5	15.5	-9.9	312.7	322.5	3.2	64.9	4.9	99.
13.9	43.0	4669.5	575.0	-5.6	-13.0	304.2	18.0	14.9	-10.1	313.8	321.3	2.4	55.5	5.8	103.
14.8	45.9	5016.8	550.0	-8.3	-15.2	304.1	17.0	14.0	-9.5	314.5	321.2	2.2	57.6	6.7	106.
15.7	48.9	5376.6	525.0	-11.1	-11.9	298.5	15.3	13.5	-7.3	315.4	324.4	2.9	93.7	7.6	108.
16.8	51.6	5750.4	500.0	-12.9	-13.9	286.7	15.3	14.7	-4.4	317.6	325.8	2.6	92.5	8.6	109.
18.0	54.8	6140.3	475.0	-14.8	-18.5	286.8	13.0	12.4	-3.7	319.8	325.8	1.9	73.2	9.6	108.
19.3	57.7	6547.7	450.0	-17.7	-23.0	289.6	11.7	11.0	-3.9	321.2	325.6	1.3	63.1	10.5	108.
20.5	61.1	6972.7	425.0	-21.4	-23.1	275.8	14.9	14.8	-1.5	321.7	326.3	1.4	86.0	11.5	108.
21.8	64.6	7417.9	400.0	-24.1	-28.4	268.7	17.6	17.6	0.4	323.7	326.8	0.9	67.7	12.7	106.
23.1	68.3	7885.2	375.0	-27.8	-29.9	256.2	17.3	16.8	4.1	324.8	327.7	0.8	81.9	14.0	104.
24.7	71.4	8377.8	350.0	-31.6	-34.0	250.6	16.8	15.8	5.6	326.2	328.3	0.6	78.8	15.4	101.
26.4	75.3	8898.1	325.0	-35.6	-39.3	250.5	17.7	16.6	5.9	327.6	329.0	0.4	68.2	16.8	98.
29.1	79.5	9449.9	300.0	-40.0	99.9	253.1	21.5	20.6	6.2	329.0	999.9	99.9	999.9	18.7	95.
30.0	82.6	10037.5	275.0	-45.1	99.9	255.7	21.4	20.6	5.3	329.9	999.9	99.9	999.9	21.0	93.
32.1	88.0	11647.2	250.0	-50.0	99.9	259.6	21.7	21.4	3.9	331.8	999.9	99.9	999.9	23.5	91.
34.4	93.0	11347.4	225.0	-55.3	99.9	266.4	26.3	26.3	1.7	333.7	999.9	99.9	999.9	26.6	90.
36.8	98.2	12093.2	200.0	-60.1	99.9	269.3	31.8	31.8	0.4	337.6	999.9	99.9	999.9	30.8	90.
39.3	104.3	12913.4	175.0	-64.0	99.9	269.1	34.8	34.8	0.6	344.3	999.9	99.9	999.9	36.0	90.
42.0	110.3	13857.3	150.0	-63.7	99.9	284.9	23.8	23.0	-6.1	360.4	999.9	99.9	999.9	41.6	90.
46.0	117.3	14978.9	125.0	-63.6	99.9	295.2	22.1	20.0	-9.4	379.8	999.9	99.9	999.9	46.5	93.
51.3	126.0	16362.8	100.0	-58.5	99.9	299.7	17.9	15.5	-8.9	414.7	999.9	99.9	999.9	52.3	96.
59.4	136.0	18150.7	75.0	-61.2	99.9	328.2	3.9	2.0	-3.3	444.6	999.9	99.9	999.9	57.6	99.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 451
DOUG CITY, KAN

7 MAY 1975
230 GMT

153 13. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	13.2	791.0	913.4	15.6	-2.8	200.0	6.2	2.1	5.3	296.8	306.4	3.4	28.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	14.4	917.2	900.0	18.4	-1.9	214.6	17.6	10.0	14.5	301.0	311.6	3.7	25.0	0.5	28.
1.1	16.5	1157.9	875.0	17.0	-3.1	217.3	19.2	11.6	15.3	301.9	312.0	3.5	25.0	1.1	32.
1.9	18.8	1403.9	850.0	15.0	-4.8	222.7	18.2	12.3	13.4	302.3	311.5	3.2	25.1	2.0	36.
2.7	21.0	1655.2	825.0	12.5	-6.9	224.2	16.9	11.8	12.2	302.2	310.3	2.8	25.2	2.9	38.
3.6	23.4	1912.2	800.0	10.3	-8.7	226.1	17.2	12.4	12.0	302.4	309.7	2.5	25.3	3.7	40.
4.4	25.9	2175.1	775.0	7.8	-10.4	228.2	17.3	12.9	11.5	302.5	309.2	2.2	26.0	4.6	41.
5.3	28.2	2443.9	750.0	5.0	-11.9	228.8	17.5	13.2	11.5	302.3	308.4	2.0	26.1	5.5	42.
6.1	30.8	2719.1	725.0	2.5	-13.8	234.1	15.1	12.2	8.8	302.4	307.9	1.8	26.8	6.3	43.
7.0	33.4	3001.5	700.0	0.4	-16.0	237.2	15.5	13.0	8.4	303.1	307.9	1.6	27.8	7.2	45.
8.1	35.9	3292.5	675.0	-1.0	-18.7	236.8	16.7	14.0	9.1	304.7	308.7	1.3	24.6	8.1	46.
9.1	38.7	3593.5	650.0	-1.5	-20.3	226.0	21.9	15.8	15.2	307.4	311.1	1.2	22.2	9.2	47.
10.1	41.3	3905.4	625.0	-2.7	-21.7	219.2	25.0	15.8	19.4	309.5	312.6	1.1	21.6	10.8	46.
11.1	44.2	4227.4	600.0	-5.3	-23.7	216.0	24.8	14.6	20.1	310.1	313.1	0.9	21.7	12.2	45.
12.1	47.3	4560.3	575.0	-7.4	-25.5	217.5	25.6	15.6	20.4	311.4	314.1	0.8	21.8	13.7	44.
13.0	50.3	4905.2	550.0	-9.4	-27.1	221.8	28.0	18.7	20.9	313.0	315.5	0.7	22.0	15.2	44.
14.0	53.3	5262.8	525.0	-12.4	-29.6	223.7	30.8	21.3	22.2	313.6	315.7	0.6	22.1	16.8	44.
15.1	56.3	5633.7	500.0	-15.0	-31.7	222.3	28.5	19.2	21.1	314.8	316.6	0.5	22.3	18.9	44.
16.3	59.4	6019.5	475.0	-17.9	-34.2	221.4	30.8	20.4	23.1	315.8	317.3	0.4	22.5	21.0	43.
17.7	63.0	6421.9	450.0	-20.0	-35.9	219.2	29.4	18.6	22.7	318.1	319.4	0.4	22.6	23.5	43.
19.2	66.3	6843.5	425.0	-22.7	-38.2	220.9	25.7	19.4	22.4	319.8	321.0	0.3	22.8	26.0	43.
21.1	70.0	7285.4	400.0	-26.2	-39.7	223.1	30.7	21.0	22.4	320.9	321.9	0.3	22.8	29.4	43.
22.5	73.6	7748.9	375.0	-29.9	-42.1	219.6	37.1	23.7	28.6	321.9	322.8	0.2	29.2	32.4	43.
24.1	77.7	8236.6	350.0	-33.8	-45.1	220.4	34.5	22.3	26.3	323.1	323.8	0.2	30.6	35.8	42.
25.7	81.6	8752.1	325.0	-37.9	-47.8	221.4	42.4	28.0	31.8	324.3	324.9	0.1	34.1	39.6	42.
27.3	85.9	9258.1	300.0	-42.7	99.9	221.8	39.2	26.2	29.2	325.2	999.9	99.9	999.9	43.8	42.
29.6	90.5	9878.6	275.0	-47.8	99.9	222.0	29.8	20.0	22.3	326.0	999.9	99.9	999.9	48.4	42.
31.9	95.1	10501.4	250.0	-52.0	99.9	220.2	34.4	22.2	26.2	328.8	999.9	99.9	999.9	52.5	42.
34.7	100.4	11176.5	225.0	-56.7	99.9	218.1	30.5	18.8	24.0	331.7	999.9	99.9	999.9	58.1	42.
37.6	106.0	11925.0	200.0	-56.4	99.9	225.1	30.8	21.8	21.7	346.7	999.9	99.9	999.9	63.2	42.
40.9	112.0	12780.0	175.0	-54.9	99.9	222.3	27.6	18.6	20.4	359.4	999.9	99.9	999.9	68.6	42.
44.5	118.7	13760.4	150.0	-56.6	99.9	218.4	27.7	17.2	21.7	372.6	999.9	99.9	999.9	73.2	41.
48.9	126.0	14916.5	125.0	-57.3	99.9	224.6	19.3	13.5	13.7	391.2	999.9	99.9	999.9	79.5	41.
54.1	134.0	16337.8	100.0	-52.8	99.9	253.8	9.9	9.5	2.8	425.7	999.9	99.9	999.9	87.8	43.
60.6	142.3	18155.9	75.0	-61.5	99.9	251.4	2.9	2.7	0.9	444.1	999.9	99.9	999.9	91.7	43.
69.3	151.3	20670.6	50.0	-61.0	99.9	263.3	0.6	0.6	0.1	499.9	999.9	99.9	999.9	90.4	42.
82.8	160.5	25068.2	25.0	-53.1	99.9	44.7	4.8	-3.4	-3.4	632.3	999.9	99.9	999.9	89.4	43.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 456
TOPEKA, KAN

7 MAY 1975
215 GMT

163 16. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.1	6.9	268.0	972.3	22.2	7.6	180.0	2.6	0.0	2.6	258.7	317.1	6.8	39.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.8	9.1	470.2	950.0	23.4	6.3	239.9	10.9	9.4	5.4	301.9	319.5	6.3	33.1	0.4	50.
1.6	11.7	702.1	925.0	22.3	5.0	236.1	10.3	8.6	5.8	302.9	319.5	5.9	32.3	0.9	55.
2.5	13.4	939.1	900.0	19.9	2.4	227.6	12.1	9.0	8.2	302.7	317.0	5.1	31.1	1.4	54.
3.3	15.6	1180.9	875.0	18.0	1.3	216.3	11.5	6.8	9.2	303.1	316.8	4.8	32.6	2.7	51.
4.2	18.3	1427.6	850.0	15.8	-1.0	212.6	13.1	7.0	11.0	303.3	315.3	4.2	31.6	2.7	46.
5.1	20.4	1680.1	825.0	13.5	-0.5	202.4	14.0	5.3	13.0	303.5	316.3	4.5	38.0	3.4	43.
6.0	22.7	1938.1	800.0	10.9	3.1	192.4	14.4	3.1	14.0	303.6	320.5	6.0	58.6	4.1	38.
6.9	25.3	2202.0	775.0	8.6	-2.3	195.1	14.3	3.7	13.8	303.6	316.1	4.4	48.4	4.8	34.
7.9	27.7	2472.6	750.0	7.8	-16.7	195.9	12.7	3.5	12.2	305.2	309.5	1.4	15.7	5.5	31.
8.9	31.3	2751.3	725.0	6.9	-15.8	202.1	15.7	7.4	13.9	307.2	312.0	1.5	17.9	6.3	30.
9.9	33.0	3039.2	700.0	6.0	-11.0	211.6	21.1	11.0	12.0	309.4	316.6	2.4	28.3	7.4	30.
10.9	35.7	3335.6	675.0	3.1	-12.6	210.5	20.6	10.5	17.8	309.4	316.0	2.2	30.4	8.7	30.
11.9	38.4	3639.7	650.0	0.1	-11.3	209.4	21.7	10.6	18.9	309.4	317.1	2.5	42.9	10.0	30.
12.9	41.1	3952.4	625.0	-2.7	-12.8	211.6	22.6	11.9	19.3	309.6	316.6	2.3	45.7	11.4	30.
14.1	44.2	4274.5	600.0	-5.4	-18.6	213.4	21.6	11.9	18.1	310.0	314.6	1.5	34.5	12.9	30.
15.2	47.3	4607.0	575.0	-7.8	-26.9	220.1	19.5	12.6	14.9	310.9	313.3	0.7	19.8	14.3	31.
16.4	50.3	4951.2	550.0	-10.2	-30.0	225.7	20.1	14.4	14.0	312.1	314.0	0.6	17.9	15.6	32.
17.6	53.4	5308.4	525.0	-11.9	-32.7	228.6	21.0	15.8	13.9	314.2	315.7	0.5	15.7	17.2	33.
19.0	56.5	5680.1	500.0	-14.6	-35.6	228.9	22.7	17.1	14.9	315.2	316.5	0.4	14.8	18.9	35.
20.6	62.0	6067.0	475.0	-16.3	-36.9	226.9	25.2	18.4	17.2	317.7	318.9	0.3	14.9	20.9	36.
22.3	63.6	6471.7	450.0	-19.0	-39.0	225.4	22.5	16.0	15.8	319.3	323.3	0.3	15.2	23.3	37.
24.0	67.0	6894.3	425.0	-22.3	-41.8	223.4	21.3	14.6	15.9	320.4	321.2	0.2	15.0	25.8	38.
25.8	70.7	7338.7	400.0	-24.6	-43.6	217.5	20.1	12.2	15.9	323.6	323.7	0.2	15.2	28.0	38.
27.6	74.7	7804.6	375.0	-28.8	-46.8	216.9	16.6	9.9	13.2	323.5	324.0	0.1	15.5	29.8	38.
29.4	78.9	8294.1	350.0	-33.1	-50.3	213.8	16.7	9.3	13.9	324.0	324.4	0.1	15.9	32.0	38.
31.6	83.0	8810.6	325.0	-37.4	-52.4	207.3	16.7	7.7	14.8	325.0	325.4	0.1	19.1	33.9	37.
33.9	87.4	9358.4	300.0	-41.9	-55.9	202.5	16.0	7.6	14.0	326.3	999.9	99.9	999.9	36.0	37.
36.4	92.2	9942.0	275.0	-46.4	-59.9	193.3	15.3	3.5	14.9	328.0	999.9	99.9	999.9	38.2	36.
39.1	97.2	10566.2	250.0	-52.2	-63.9	190.8	16.1	4.7	15.4	328.4	999.9	99.9	999.9	40.2	34.
41.8	102.5	11247.3	225.0	-56.3	-67.9	204.6	19.9	8.3	18.1	332.2	999.9	99.9	999.9	43.0	34.
45.3	108.5	11983.9	200.0	-58.7	-71.9	219.3	24.8	15.7	19.2	335.8	999.9	99.9	999.9	47.8	34.
48.8	114.8	12916.6	175.0	-59.5	-75.9	226.0	23.8	17.1	16.5	351.7	999.9	99.9	999.9	52.8	35.
52.2	121.7	13780.5	150.0	-60.6	-79.9	221.9	19.7	13.1	14.6	365.7	999.9	99.9	999.9	57.3	35.
57.1	129.3	14914.0	125.0	-60.0	-83.9	238.9	33.4	28.6	17.3	386.3	999.9	99.9	999.9	64.0	37.
63.1	137.7	16323.0	100.0	-55.8	-87.9	288.0	16.8	15.9	-5.2	419.9	999.9	99.9	999.9	70.8	41.
70.0	146.0	18119.9	75.0	-63.3	-91.9	332.6	8.4	3.9	-7.4	440.2	999.9	99.9	999.9	71.9	44.
80.6	155.3	20640.6	50.0	-59.4	-95.9	22.5	2.4	-0.9	-2.2	503.6	999.9	99.9	999.9	76.7	46.
97.0	164.7	25058.6	25.0	-51.1	-99.9	318.5	1.8	1.2	-1.3	638.1	999.9	99.9	999.9	68.0	45.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 476
GRAND JUNCTION, COLO

7 MAY 1975
215 GMT

143 20. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	19.5	1474.0	844.5	6.1	-9.7	270.0	3.1	3.1	0.0	293.4	299.5	2.2	31.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.8	21.3	1665.4	825.0	5.5	-8.9	239.1	8.0	8.9	4.1	254.7	301.5	2.4	34.4	0.3	60.
1.7	23.7	1915.9	800.0	3.2	-10.1	250.4	8.6	8.1	2.0	254.8	301.2	2.2	37.0	0.7	63.
2.5	25.9	2172.1	775.0	0.7	-11.4	256.1	9.2	8.9	2.2	294.8	300.8	2.1	39.8	1.2	66.
3.4	28.6	2434.1	750.0	-1.9	-12.3	254.9	10.1	9.7	2.6	294.7	300.5	2.0	44.8	1.7	70.
4.2	31.1	2702.3	725.0	-4.5	-13.8	256.1	11.3	11.0	2.7	294.7	300.0	1.8	48.0	2.2	71.
5.2	33.8	2977.5	700.0	-7.1	-15.0	262.5	10.8	10.7	1.4	294.9	299.8	1.7	53.0	2.8	73.
6.1	36.3	3250.1	675.0	-9.4	-17.0	269.3	9.0	9.0	0.1	295.3	299.7	1.5	53.8	3.4	75.
7.1	39.1	3550.5	650.0	-11.8	-19.3	262.6	7.1	7.1	0.9	295.7	299.5	1.3	53.5	3.9	77.
8.2	41.7	3849.7	625.0	-14.2	-21.7	262.4	6.3	6.3	0.8	295.3	299.5	1.1	53.0	4.3	77.
9.3	44.6	4157.7	600.0	-17.2	-24.1	266.7	7.0	7.0	0.4	296.3	299.1	0.9	54.7	4.7	78.
10.3	47.5	4475.3	575.0	-20.0	-25.0	262.8	8.4	8.3	1.1	296.7	299.3	0.9	64.2	5.2	78.
11.4	50.4	4803.3	550.0	-22.6	-28.1	260.6	9.0	8.9	1.5	297.3	299.5	0.7	60.5	5.7	79.
12.4	53.4	5142.4	525.0	-25.8	-30.4	263.8	9.1	9.1	1.0	297.4	299.2	0.6	65.6	6.3	79.
13.4	56.4	5494.2	500.0	-28.2	-33.1	277.1	8.9	8.8	-1.1	298.6	300.1	0.5	63.2	6.8	79.
14.7	59.7	5861.7	475.0	-29.7	-37.0	300.8	8.9	7.6	-4.6	301.3	302.4	0.3	48.6	7.4	82.
16.1	63.1	6245.3	450.0	-32.3	-36.3	327.0	9.0	4.9	-7.5	302.7	303.9	0.4	66.9	7.8	86.
17.3	66.6	6645.9	425.0	-35.6	-38.1	322.5	10.8	6.6	-8.6	303.4	304.5	0.3	77.5	8.3	91.
18.6	70.1	7065.0	400.0	-38.7	-41.4	323.1	12.4	7.5	-9.9	304.6	305.4	0.2	75.4	8.9	95.
20.0	73.8	7506.5	375.0	-40.6	99.9	338.7	15.4	5.6	-14.4	307.9	999.9	99.9	999.9	9.6	101.
21.3	77.8	7973.7	350.0	-43.5	99.9	352.5	13.7	1.8	-13.5	310.1	999.9	99.9	999.9	10.2	107.
23.0	81.7	8469.4	325.0	-47.2	99.9	357.4	16.0	0.7	-16.0	311.6	999.9	99.9	999.9	10.8	115.
24.7	85.9	8994.3	300.0	-49.3	99.9	342.9	9.2	2.7	-8.8	315.9	999.9	99.9	999.9	11.5	121.
26.8	90.4	9569.8	275.0	-45.8	99.9	293.3	9.0	8.2	-3.5	328.9	999.9	99.9	999.9	12.5	122.
29.0	95.2	10216.6	250.0	-44.9	99.9	256.8	10.3	10.0	2.3	339.3	999.9	99.9	999.9	13.6	120.
31.6	100.2	10911.3	225.0	-45.0	99.9	246.7	14.5	13.4	5.7	349.5	999.9	99.9	999.9	15.0	113.
34.6	105.8	11695.7	200.0	-47.3	99.9	243.3	16.8	15.0	7.5	357.9	999.9	99.9	999.9	16.7	106.
38.1	111.7	12577.6	175.0	-49.6	99.9	232.9	13.5	10.8	8.2	368.1	999.9	99.9	999.9	18.9	99.
41.7	118.0	13574.6	150.0	-54.5	99.9	229.4	14.4	11.0	9.4	376.1	999.9	99.9	999.9	20.9	92.
45.9	125.3	14741.5	125.0	-54.2	99.9	212.6	10.8	5.8	9.1	396.9	999.9	99.9	999.9	23.0	88.
51.3	133.3	16171.2	100.0	-54.1	99.9	230.4	7.2	5.6	4.6	423.2	999.9	99.9	999.9	25.3	82.
57.9	141.3	18005.1	75.0	-56.8	99.9	180.3	7.7	0.0	7.7	453.8	999.9	99.9	999.9	26.1	75.
66.9	150.0	20544.2	50.0	-59.2	99.9	139.9	2.0	-1.3	1.5	504.0	999.9	99.9	999.9	26.7	73.
80.6	159.0	24921.9	25.0	-54.5	99.9	23.9	5.6	-2.3	-5.1	627.9	999.9	99.9	999.9	25.5	75.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 11001
MARSHALL SPACE FLIGHT CENTER

7 MAY 1975
226 GMT

164 15. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.3	180.0	992.9	20.1	18.4	130.0	1.6	-1.2	1.0	295.7	331.0	13.6	90.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.8	7.8	338.7	975.0	22.1	20.6	151.6	4.7	-2.2	4.1	299.5	341.5	16.0	91.8	0.2	327.
1.8	10.3	564.8	950.0	20.9	20.3	191.7	8.2	1.7	8.0	307.5	342.8	16.0	96.7	0.5	347.
2.7	12.0	796.0	925.0	19.1	18.2	198.0	11.2	3.5	10.7	300.8	339.1	14.4	94.4	1.0	2.
3.5	14.2	1032.3	900.0	18.2	16.6	199.1	12.7	4.1	12.0	302.1	337.8	13.3	90.1	1.6	9.
4.4	16.2	1274.1	875.0	17.4	11.5	203.7	9.8	4.0	9.0	303.1	339.0	9.8	68.5	2.2	11.
5.4	18.5	1521.5	850.0	15.9	8.5	223.1	10.1	6.9	7.4	303.9	320.6	8.2	61.4	2.7	16.
6.3	20.5	1774.6	825.0	13.7	7.2	221.7	8.4	5.6	6.3	304.1	325.6	7.7	64.5	3.2	20.
7.3	22.8	2033.2	800.0	11.3	6.2	234.1	6.5	5.2	3.8	304.2	325.0	7.5	70.9	3.6	24.
8.2	25.1	2297.8	775.0	9.3	7.3	223.0	7.0	4.8	5.1	304.9	328.0	8.3	87.6	3.9	26.
9.1	27.3	2569.3	750.0	6.9	6.2	216.7	8.9	5.3	7.1	305.1	327.3	8.0	95.8	4.3	27.
10.2	29.8	2948.2	725.0	6.5	4.7	228.4	9.8	7.3	6.5	307.5	328.5	7.4	88.3	4.9	29.
11.2	32.3	3136.0	700.0	4.5	2.0	247.5	9.5	8.8	3.6	308.3	326.3	6.3	83.7	5.5	32.
12.3	34.9	3431.4	675.0	2.2	0.9	268.5	9.6	9.6	0.3	308.9	326.2	6.1	90.9	5.9	36.
13.3	37.2	3737.1	650.0	1.7	-1.6	287.5	10.0	9.6	-3.0	311.6	326.9	5.3	78.7	6.2	41.
14.5	40.0	4052.6	625.0	-0.5	-4.5	305.0	9.4	7.7	-5.4	312.4	325.5	4.4	74.4	6.4	47.
15.8	42.6	4378.4	600.0	-2.5	-9.9	305.4	7.8	6.4	-4.5	313.6	322.9	3.0	57.1	6.5	53.
16.9	45.4	4715.3	575.0	-4.0	-34.6	298.5	10.5	9.2	-5.0	315.4	316.6	0.4	7.2	6.8	58.
18.2	48.3	5064.2	550.0	-6.7	-34.5	301.7	12.2	10.3	-6.4	316.1	317.4	0.4	9.0	7.2	64.
19.5	51.1	5426.0	525.0	-8.3	-37.3	290.8	13.4	12.5	-4.7	318.5	319.5	0.3	7.5	7.8	70.
20.9	54.3	5802.4	500.0	-10.8	-43.7	289.7	13.8	13.0	-4.7	319.9	320.4	0.2	4.7	8.8	74.
22.4	57.3	6194.0	475.0	-14.1	-54.2	293.0	13.5	12.4	-5.2	320.5	320.7	0.1	2.4	9.7	79.
23.6	60.6	6601.6	450.0	-17.6	-48.6	286.5	15.3	14.6	-4.3	321.1	321.4	0.1	4.7	10.7	82.
25.1	64.1	7026.4	425.0	-20.7	-49.3	279.8	17.1	16.8	-2.9	322.4	322.8	0.1	5.6	12.1	94.
26.6	67.4	7472.6	400.0	-23.3	-48.9	278.4	18.3	18.1	-2.7	324.7	325.1	0.1	7.5	13.5	86.
28.4	71.0	7941.9	375.0	-26.4	-52.8	275.4	17.2	17.1	-1.6	326.6	326.9	0.1	6.2	15.4	87.
30.3	75.0	8437.3	350.0	-29.7	-55.6	295.1	19.7	17.8	-8.4	328.6	328.9	0.1	6.0	17.4	89.
31.4	79.2	8959.9	325.0	-34.8	-57.6	294.3	23.0	20.9	-9.5	328.6	328.8	0.0	7.7	18.5	91.
34.3	83.2	9513.6	300.0	-39.3	-99.8	291.9	24.1	22.4	-9.0	329.9	999.9	99.9	999.9	22.4	95.
36.3	87.6	10104.1	275.0	-43.7	99.9	289.7	26.1	24.5	-8.8	331.9	999.9	99.9	999.9	25.3	97.
38.6	92.6	10736.7	250.0	-49.1	99.9	293.5	25.9	23.8	-10.3	333.1	999.9	99.9	999.9	28.8	99.
41.2	97.8	11419.6	225.0	-54.7	99.9	290.6	26.6	24.9	-9.4	334.7	999.9	99.9	999.9	32.9	100.
43.8	103.7	12162.7	200.0	-61.0	99.9	291.2	28.7	26.8	-10.4	336.2	999.9	99.9	999.9	36.8	102.
46.7	109.8	12982.5	175.0	-65.4	99.9	292.7	41.1	37.9	-15.8	342.1	999.9	99.9	999.9	43.1	103.
49.8	116.5	13920.5	150.0	-64.3	99.9	289.7	39.9	37.6	-13.4	359.3	999.9	99.9	999.9	50.5	104.
53.3	124.7	15040.2	125.0	-61.4	99.9	304.6	34.7	28.6	-15.7	383.8	999.9	99.9	999.9	58.4	105.
57.6	133.5	16414.4	100.0	-61.9	99.9	301.3	17.3	14.8	-9.0	408.1	999.9	99.9	999.9	63.6	107.
63.3	142.7	18181.2	75.0	-63.7	99.9	310.2	3.8	2.9	-2.5	439.4	999.9	99.9	999.9	67.7	109.
71.2	153.5	20679.9	50.0	-58.6	99.9	64.8	3.9	-3.5	-1.7	505.4	999.9	99.9	999.9	68.0	110.
83.6	164.5	25120.4	25.0	-51.5	99.9	105.6	4.6	-4.5	1.2	636.8	999.9	99.9	999.9	67.5	111.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 22002
FT. SILL, OKLA

7 MAY 1975
310 GMT

129 85. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	8.6	362.0	963.4	20.1	8.8	150.0	2.1	-1.0	1.8	297.4	317.4	7.4	48.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.5	9.8	483.9	950.0	24.2	7.9	177.4	9.0	-0.4	9.0	302.8	322.4	7.1	35.4	0.3	352.
1.5	11.9	716.7	925.0	22.7	3.6	185.0	8.0	0.7	8.0	303.3	318.4	5.4	28.5	0.7	357.
2.4	13.9	954.2	900.0	21.2	2.1	196.6	7.8	2.2	7.5	304.0	318.1	5.0	28.3	1.1	2.
3.4	15.9	1196.8	875.0	19.0	0.3	213.8	7.9	4.4	6.6	304.2	317.0	4.5	28.4	1.5	9.
4.4	18.2	1444.6	850.0	16.9	-1.5	226.6	11.1	8.0	7.6	304.4	316.0	4.0	28.4	2.1	17.
5.3	20.4	1698.0	825.0	14.8	-3.3	233.0	13.3	10.6	8.0	304.8	315.4	3.7	28.5	2.7	25.
6.5	22.6	1957.0	800.0	12.6	-4.8	239.2	13.6	11.7	6.9	305.0	314.8	3.3	29.2	3.5	33.
7.4	25.7	2221.9	775.0	10.1	-6.0	239.0	14.4	12.4	7.4	305.0	314.3	3.2	31.7	4.2	38.
8.5	27.2	2493.2	750.0	7.5	-7.4	245.9	15.0	13.7	6.1	305.1	313.7	2.9	33.6	5.1	42.
9.5	29.7	2771.2	725.0	4.9	-8.4	251.8	15.9	15.1	5.0	305.2	313.5	2.8	37.4	6.0	47.
10.6	32.2	3056.1	700.0	2.3	-9.9	248.4	17.4	16.2	6.4	305.3	313.0	2.6	39.9	6.9	51.
11.7	34.9	3348.8	675.0	0.2	-13.8	240.5	20.1	17.5	9.9	306.1	312.0	1.9	33.9	8.1	52.
12.6	37.3	3651.4	650.0	1.1	-21.2	241.4	20.9	18.4	10.0	310.4	313.8	1.1	17.0	9.6	54.
14.1	40.1	3966.2	625.0	-0.3	-22.3	241.3	20.5	18.0	9.9	312.2	315.5	1.0	17.1	11.1	55.
15.3	42.7	4291.4	600.0	-2.3	-23.8	239.2	20.1	17.2	10.3	313.6	316.6	0.9	17.3	12.6	55.
16.5	45.6	4627.8	575.0	-4.6	-25.6	238.8	20.3	17.4	10.5	314.6	317.4	0.8	17.4	14.0	56.
17.7	48.6	4975.8	550.0	-7.5	-26.0	237.8	22.4	19.0	12.0	315.3	318.0	0.8	20.9	15.6	56.
18.9	51.4	5335.6	525.0	-10.9	-28.6	233.7	21.5	17.3	12.7	315.4	317.7	0.7	21.6	17.2	56.
20.2	54.5	5708.6	500.0	-13.5	-30.3	232.9	24.0	19.1	14.4	316.7	318.7	0.6	22.6	18.9	56.
21.4	57.6	6096.9	475.0	-16.3	-32.7	236.2	23.1	19.2	12.8	317.8	319.6	0.5	22.7	20.7	56.
22.8	61.0	6550.8	450.0	-19.8	-35.5	237.2	21.9	18.4	11.9	318.4	319.8	0.4	22.9	22.5	56.
24.2	64.4	6922.9	425.0	-22.7	-38.0	236.2	20.4	17.4	10.8	319.9	321.1	0.3	23.1	24.3	56.
25.6	67.9	7364.7	400.0	-26.1	-39.9	237.6	25.3	21.3	13.6	321.0	322.0	0.3	25.8	26.1	56.
27.0	71.3	7827.7	375.0	-30.5	-43.3	235.5	23.9	19.7	13.5	321.1	321.9	0.2	27.2	28.4	56.
28.6	75.3	8313.4	350.0	-35.2	-47.3	236.8	22.6	18.9	12.3	321.3	321.8	0.1	27.4	30.6	56.
30.4	79.5	8825.0	325.0	-38.7	99.9	237.5	27.1	22.9	14.6	323.3	999.9	99.9	999.9	33.0	56.
32.1	83.6	9371.0	300.0	-42.6	99.9	239.0	28.6	24.3	15.2	325.3	999.9	99.9	999.9	36.0	56.
34.1	88.0	9953.3	275.0	-46.5	99.9	236.8	38.0	31.9	20.8	327.9	999.9	99.9	999.9	39.8	56.
36.1	92.8	10580.3	250.0	-50.7	99.9	241.6	41.0	36.0	19.5	330.7	999.9	99.9	999.9	45.0	57.
38.5	97.8	11260.9	225.0	-54.7	99.9	239.0	44.8	38.4	23.1	334.7	999.9	99.9	999.9	51.5	57.
40.9	103.3	12011.1	200.0	-55.8	99.9	241.5	43.3	38.0	20.6	344.4	999.9	99.9	999.9	57.3	57.
43.2	109.3	12855.0	175.0	-58.9	99.9	247.4	32.8	30.3	12.6	352.8	999.9	99.9	999.9	63.1	58.
46.1	115.6	13823.1	150.0	-59.0	99.9	245.9	37.5	34.3	15.3	368.5	999.9	99.9	999.9	69.1	59.
49.3	123.0	14963.6	125.0	-60.1	99.9	243.0	26.5	23.6	12.0	386.2	999.9	99.9	999.9	75.5	59.
52.7	130.9	16346.0	100.0	-64.8	99.9	236.0	21.5	17.8	12.0	402.6	999.9	99.9	999.9	81.2	59.
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

Sounding Data**7 May 1975****1200 GMT**

153-173
~~153-173~~

STATION NO. 232
BOOTHVILLE, LA

7 MAY 1975
1115 GMT

165 15. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.4	5.4	1.0	1011.0	23.2	22.4	140.0	2.1	-1.3	1.6	297.7	342.2	17.1	95.0	0.0	0.
0.4	6.3	97.2	1009.0	23.8	23.2	163.6	9.3	-2.6	4.9	299.4	346.9	18.2	96.2	0.2	329.
1.5	8.6	319.5	975.0	23.0	22.3	165.7	11.0	-2.7	10.6	300.7	347.3	17.7	96.3	0.8	339.
2.3	10.9	546.2	950.0	21.2	20.5	172.9	11.8	-1.5	11.7	300.8	343.7	16.2	96.6	1.3	343.
3.2	13.3	777.7	925.0	19.6	18.8	176.7	9.9	-0.6	9.8	301.4	341.1	14.9	94.8	2.0	347.
4.2	15.8	1014.0	900.0	19.1	7.7	180.3	8.7	0.0	8.7	302.2	323.1	7.6	49.3	2.5	350.
5.2	18.2	1256.8	875.0	20.0	9.2	180.0	5.9	0.9	5.9	305.7	329.0	8.4	49.9	2.9	352.
6.2	20.6	1506.6	850.0	18.9	9.9	215.8	6.9	4.1	5.6	307.1	332.4	9.1	56.0	3.2	355.
7.1	23.1	1762.2	825.0	15.8	13.8	224.4	6.7	4.7	4.8	306.9	340.4	12.2	88.4	3.5	360.
8.2	25.6	2023.7	800.0	14.1	10.9	214.0	7.1	4.0	5.9	307.6	336.3	10.3	80.6	3.9	4.
9.3	28.2	2291.4	775.0	13.3	-9.2	205.9	7.7	3.3	6.9	308.4	315.9	2.5	20.0	4.4	7.
10.4	31.0	2567.1	750.0	13.1	-3.1	214.1	6.9	3.9	5.7	311.3	323.3	4.1	32.2	4.8	9.
11.5	33.8	2851.3	725.0	11.8	-4.8	220.0	9.1	5.9	7.0	312.9	324.0	3.7	30.9	5.2	11.
12.8	36.4	3144.1	700.0	10.9	-13.0	225.7	10.2	7.8	6.6	314.8	321.2	2.0	17.3	5.9	16.
13.8	39.4	3446.1	675.0	8.4	-1.7	243.3	9.9	8.8	4.4	315.7	330.7	5.0	49.2	6.4	19.
15.1	42.1	3756.6	650.0	5.6	-1.4	265.0	10.5	10.5	0.9	316.0	332.0	5.4	60.8	6.9	24.
16.3	45.3	4076.5	625.0	3.3	-6.3	271.5	13.7	13.7	-0.4	316.7	328.3	3.8	49.4	7.2	31.
17.6	48.4	4406.1	600.0	0.4	-5.7	270.1	16.2	16.2	-0.0	317.1	329.7	4.2	64.0	7.9	38.
18.9	51.3	4746.0	575.0	-2.6	-7.4	266.7	18.0	18.0	1.1	317.4	329.5	4.0	72.3	8.8	45.
20.2	54.6	5097.6	550.0	-4.9	-13.8	266.7	21.0	20.9	1.2	318.5	326.0	2.4	49.6	10.0	51.
21.6	57.6	5461.6	525.0	-7.5	-21.1	270.5	23.5	23.5	-0.2	319.6	324.0	1.4	33.0	11.6	56.
23.1	61.1	5839.1	500.0	-10.9	-21.1	269.5	23.6	23.6	0.2	319.9	324.6	1.4	42.5	13.3	61.
24.5	64.6	6230.6	475.0	-14.5	-23.3	269.9	21.2	21.2	0.0	320.1	324.1	1.2	47.3	15.1	65.
26.0	68.0	6640.5	450.0	-14.3	-40.4	274.4	16.3	16.3	-1.3	325.2	326.1	0.2	8.7	16.7	67.
27.6	71.5	7072.8	425.0	-16.3	-41.7	278.6	16.5	16.3	-2.5	328.0	328.8	0.2	9.1	16.0	70.
29.3	75.5	7525.5	400.0	-20.3	-39.4	274.5	17.1	17.0	-1.3	328.6	329.7	0.3	16.2	19.5	72.
31.1	79.5	7999.9	375.0	-24.4	-39.9	269.0	21.9	21.9	0.4	329.3	330.5	0.3	22.0	21.5	74.
33.0	83.5	8498.4	350.0	-28.4	-38.5	270.4	24.4	24.4	-0.2	330.5	331.0	0.4	36.8	24.0	76.
35.0	87.7	9025.4	325.0	-32.7	-41.3	273.5	27.6	27.4	-1.7	331.5	332.7	0.3	41.5	27.1	78.
37.1	92.3	9583.5	300.0	-37.5	-44.9	272.2	29.0	28.9	-1.1	332.5	333.4	0.2	45.2	30.3	79.
39.4	97.1	10177.9	275.0	-42.4	99.9	274.6	30.1	30.0	-2.4	333.9	999.9	99.9	999.9	34.3	81.
41.7	102.1	10814.4	250.0	-48.0	99.9	274.6	33.2	33.1	-2.7	334.7	999.9	99.9	999.9	38.7	83.
44.2	107.5	11502.4	225.0	-51.9	99.9	280.4	33.5	33.0	-6.1	339.0	999.9	99.9	999.9	43.3	84.
46.9	113.3	12258.1	200.0	-55.7	99.9	283.3	34.5	33.6	-7.9	344.5	999.9	99.9	999.9	49.0	86.
49.9	119.5	13090.3	175.0	-60.7	99.9	283.5	38.4	37.3	-8.9	349.8	999.9	99.9	999.9	54.6	88.
53.1	126.3	14052.4	150.0	-63.9	99.9	279.8	38.5	38.0	-6.6	360.1	999.9	99.9	999.9	62.9	90.
56.9	133.7	15155.7	125.0	-67.1	99.9	289.7	30.5	28.7	-10.3	373.6	999.9	99.9	999.9	71.5	92.
61.5	141.0	15494.2	100.0	-70.9	99.9	302.8	20.1	16.9	-10.9	390.8	999.9	99.9	999.9	77.8	93.
67.4	149.1	18188.7	75.0	-73.0	99.9	12.3	3.6	-0.8	-3.5	419.5	999.9	99.9	999.9	82.3	96.
74.9	157.3	23645.7	50.0	-62.5	99.9	84.0	5.6	-5.6	-0.6	496.3	999.9	99.9	999.9	81.6	97.
87.0	165.7	25081.4	25.0	-48.5	99.9	332.1	1.4	0.6	-1.2	645.5	999.9	99.9	999.9	78.8	97.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 235
JACKSON, MISS

7 MAY 1975
1115 GMT

161 12. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.9	100.0	998.5	22.8	22.8	170.0	4.2	-0.7	4.1	258.5	344.9	17.8	100.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
0.7	6.5	307.7	975.0	21.4	20.5	204.3	4.3	1.8	3.9	258.8	340.1	15.8	94.6	0.5	360.
1.5	8.6	533.7	950.0	20.8	19.8	188.7	11.1	1.7	11.0	300.4	341.4	15.5	94.1	0.9	4.
2.3	10.5	765.2	925.0	20.1	17.0	188.2	11.2	1.6	11.1	301.7	337.4	13.4	82.4	1.5	6.
3.1	12.6	1001.8	900.0	19.3	12.8	180.1	10.1	0.0	10.1	302.8	331.3	10.5	66.6	2.0	6.
3.9	14.7	1244.4	875.0	19.0	12.2	176.7	8.3	-0.5	8.3	304.5	333.1	10.3	64.4	2.4	4.
4.8	16.7	1493.5	850.0	17.6	10.5	191.7	5.7	1.2	5.6	305.8	332.0	9.4	63.2	2.8	4.
5.6	18.9	1748.2	825.0	15.4	9.1	216.6	5.1	3.0	4.1	306.0	330.6	8.8	66.1	3.0	5.
6.4	21.0	2109.8	800.0	17.7	6.2	262.8	8.6	8.6	1.1	311.0	332.4	7.5	46.8	3.2	10.
7.2	23.1	2280.5	775.0	16.0	-4.0	263.4	11.5	11.4	1.3	311.5	322.5	3.7	24.9	3.4	18.
8.2	25.6	2557.3	750.0	12.9	-8.9	265.9	13.5	13.4	1.0	310.9	318.9	2.6	21.0	3.8	30.
9.3	27.9	2840.6	725.0	11.1	-11.4	264.0	13.5	13.4	1.4	311.9	318.6	2.2	19.3	4.3	39.
10.2	30.4	3131.8	700.0	8.3	-11.4	260.5	13.2	13.0	2.2	311.9	319.0	2.3	23.5	4.9	45.
11.3	33.0	3430.5	675.0	5.8	-12.8	251.8	13.1	12.4	4.1	312.3	318.9	2.1	24.8	5.6	50.
12.3	35.5	3737.8	650.0	2.8	-11.4	244.6	13.9	12.6	6.0	312.4	320.0	2.5	34.3	6.4	52.
13.8	38.1	4053.2	625.0	-0.7	-7.9	247.0	14.1	13.0	5.5	312.1	322.3	3.4	57.9	7.6	54.
15.0	40.7	4378.4	600.0	-3.2	-6.4	251.1	14.5	13.7	4.7	312.9	324.7	3.9	78.5	8.7	56.
16.4	43.4	4715.0	575.0	-4.3	-6.4	265.6	15.1	15.1	1.2	315.4	327.8	4.1	85.4	9.8	58.
17.6	46.3	5064.4	550.0	-6.6	-8.8	274.7	14.8	14.8	-1.2	316.6	327.6	3.6	84.2	10.8	62.
19.0	49.3	5426.7	525.0	-9.0	-11.6	273.2	14.3	14.3	-0.8	317.9	327.2	3.0	81.8	11.8	65.
20.4	52.1	5803.1	500.0	-11.3	-12.7	260.7	14.3	14.1	2.3	319.6	328.6	2.9	89.6	12.9	67.
21.7	55.2	6195.4	475.0	-13.8	-15.3	248.1	14.6	13.6	5.5	321.1	328.9	2.4	88.6	14.0	68.
23.1	58.3	6604.3	450.0	-16.8	-18.3	241.8	15.0	13.3	7.1	322.3	328.8	2.0	88.3	15.3	67.
24.6	61.7	7031.3	425.0	-20.0	-21.5	241.7	15.9	14.0	7.5	323.5	328.8	1.6	87.3	16.6	67.
26.2	65.2	7478.4	400.0	-23.1	-25.0	242.4	18.0	16.0	8.4	325.1	329.3	1.2	84.2	18.3	66.
28.3	68.7	7950.1	375.0	-24.9	-26.8	268.4	20.6	20.6	0.6	328.8	332.6	1.1	83.6	20.5	67.
30.4	72.3	8448.0	350.0	-28.9	-31.3	277.3	25.5	25.3	-3.2	329.8	332.5	0.8	79.6	23.1	71.
32.4	76.3	8973.3	325.0	-33.4	-36.3	279.7	28.3	27.9	-4.8	330.6	332.5	0.5	75.0	26.0	74.
34.4	80.4	9530.3	300.0	-37.9	-41.1	279.5	33.3	32.8	-5.5	331.9	333.2	0.3	71.8	29.4	77.
36.5	84.8	10123.2	275.0	-43.3	99.9	276.7	35.9	35.7	-4.2	332.5	999.9	99.9	999.9	33.6	90.
38.3	89.2	10758.6	250.0	-47.7	99.9	276.3	32.0	31.8	-3.5	335.2	999.9	99.9	999.9	37.1	81.
40.6	94.4	11446.3	225.0	-53.2	99.9	268.5	36.6	36.6	0.9	337.0	999.9	99.9	999.9	41.3	83.
42.7	99.6	12155.7	200.0	-58.6	99.9	265.8	49.0	48.9	3.6	339.9	999.9	99.9	999.9	46.6	83.
44.9	105.5	13025.3	175.0	-63.6	99.9	271.0	40.2	40.2	-0.7	344.9	999.9	99.9	999.9	53.8	84.
47.9	112.0	13960.1	150.0	-66.6	99.9	276.4	42.4	42.2	-4.8	355.4	999.9	99.9	999.9	60.1	85.
52.1	119.3	15060.4	125.0	-67.4	99.9	281.3	40.9	40.1	-8.1	372.9	999.9	99.9	999.9	72.0	87.
56.7	128.0	16427.7	100.0	-66.6	99.9	308.3	18.7	14.7	-11.6	399.1	999.9	99.9	999.9	79.1	89.
63.0	137.3	18144.0	75.0	-68.9	99.9	357.7	9.2	0.4	-9.2	428.5	999.9	99.9	999.9	82.0	92.
72.0	147.5	20610.3	50.0	-62.1	99.9	71.2	11.5	-10.9	-3.7	497.1	999.9	99.9	999.9	80.3	93.
85.9	158.5	25020.6	25.0	-51.6	99.9	117.2	2.8	-2.5	1.3	636.4	999.9	99.9	999.9	76.3	94.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 240
LAKE CHARLES, LA

7 MAY 1975
1115 GMT

160 29. C

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.0	5.0	1006.9	25.0	23.8	170.0	6.2	-1.1	6.1	300.1	349.3	18.8	93.0	0.0	0.
0.3	4.6	65.8	1000.0	24.5	24.0	170.9	8.2	-0.4	8.2	300.2	350.4	19.2	98.9	0.1	356.
0.9	6.5	288.3	975.0	22.8	22.7	166.7	9.7	1.1	9.6	300.5	348.0	18.1	99.8	0.5	358.
1.6	8.7	515.5	950.0	22.2	21.3	196.2	8.8	2.5	8.5	302.0	347.1	17.0	94.7	0.8	5.
2.5	10.9	747.8	925.0	20.5	19.6	201.8	7.9	2.9	7.3	302.4	344.3	15.7	94.3	1.2	10.
3.2	13.0	984.5	900.0	18.2	18.2	205.0	8.9	3.8	8.1	302.3	341.7	14.8	99.6	1.6	13.
4.0	15.3	1226.6	875.0	17.0	17.0	208.5	9.5	4.6	8.4	303.4	341.4	14.2	101.5	2.0	16.
4.7	17.5	1474.3	850.0	15.7	9.9	206.6	14.5	6.5	12.9	303.8	328.9	9.1	68.9	2.5	18.
5.7	19.9	1727.8	825.0	15.4	8.8	202.5	15.5	5.9	14.3	306.0	330.2	8.7	65.0	3.4	20.
6.5	22.1	1989.8	800.0	15.5	12.4	207.5	15.7	7.2	13.9	309.2	341.0	11.4	82.2	4.2	21.
7.3	24.6	2259.2	775.0	13.5	12.4	211.5	16.9	8.8	14.4	309.9	342.8	11.8	93.3	4.9	22.
8.1	27.0	2535.2	750.0	11.5	10.0	216.3	17.4	10.3	14.0	310.4	339.5	10.3	90.2	5.7	24.
9.0	29.5	2819.2	725.0	10.9	1.0	225.5	18.1	12.9	12.7	312.2	329.0	5.7	50.7	6.7	26.
10.0	32.1	3111.4	700.0	8.9	1.9	232.9	18.7	14.9	11.3	313.2	331.7	6.4	62.1	7.7	29.
11.0	34.9	3412.0	675.0	7.9	-13.5	239.7	17.4	15.0	8.8	314.7	321.0	2.0	20.5	8.7	32.
11.9	37.4	3721.6	650.0	5.6	-28.4	252.7	18.8	17.9	5.6	315.4	317.3	0.6	6.5	9.5	36.
12.9	40.3	4040.7	625.0	3.2	-43.4	261.6	22.1	21.9	3.3	316.1	316.6	0.1	1.7	10.5	40.
14.1	43.0	4369.6	600.0	0.9	-29.5	264.0	24.8	24.7	2.6	317.2	319.1	0.5	0.1	11.7	46.
15.3	46.0	4709.5	575.0	-1.9	-30.0	257.1	27.8	27.1	6.2	317.7	319.6	0.5	9.5	13.3	51.
16.4	49.1	5060.8	550.0	-4.9	-26.5	258.8	22.9	22.5	4.5	318.3	321.0	0.8	16.6	15.0	54.
17.7	52.1	5424.9	525.0	-7.3	-54.6	258.0	18.3	17.9	3.8	319.5	319.7	0.0	1.0	16.4	56.
19.0	55.3	5803.1	500.0	-10.0	-56.2	253.3	17.2	16.4	4.9	320.8	321.0	0.0	1.0	17.6	57.
20.3	58.6	6156.6	475.0	-12.7	-57.9	248.9	17.0	15.9	6.1	322.2	322.4	0.0	1.0	19.0	58.
21.9	62.1	6606.8	450.0	-15.2	-59.5	247.7	18.1	16.8	6.9	324.1	324.2	0.0	1.0	20.5	59.
23.3	65.7	7037.0	425.0	-17.8	-61.3	255.4	15.6	15.1	3.9	326.0	326.1	0.0	1.0	22.0	60.
24.9	69.4	7487.0	400.0	-21.8	-47.5	258.8	16.0	15.6	3.1	326.6	327.1	0.1	7.6	23.4	61.
26.5	73.2	7959.4	375.0	-25.7	-36.6	255.9	17.7	17.1	4.3	327.5	329.1	0.4	35.2	24.9	62.
28.2	77.3	8454.6	350.0	-30.2	-38.8	261.2	16.8	16.6	2.6	328.0	329.4	0.4	42.4	26.7	63.
30.0	81.5	8978.0	325.0	-34.1	-38.3	259.1	21.0	20.6	4.0	329.6	331.2	0.4	65.3	28.5	64.
31.9	86.0	9532.7	300.0	-39.0	99.9	258.0	25.3	24.7	5.3	330.5	999.9	99.9	999.9	31.2	66.
33.9	90.8	10123.4	275.0	-44.0	99.9	256.5	29.8	28.9	7.0	331.5	999.9	99.9	999.9	34.6	67.
36.3	95.8	10754.8	250.0	-49.6	99.9	254.1	29.2	28.1	8.0	332.3	999.9	99.9	999.9	38.8	68.
38.9	101.3	11437.8	225.0	-53.5	99.9	259.3	30.6	30.1	5.7	336.5	999.9	99.9	999.9	43.5	69.
41.8	107.5	12187.4	200.0	-57.3	99.9	260.7	35.3	34.9	5.7	342.0	999.9	99.9	999.9	48.8	70.
45.0	114.0	13029.2	175.0	-58.2	99.9	257.5	40.3	39.4	8.7	353.9	999.9	99.9	999.9	55.7	71.
48.6	121.0	13954.2	150.0	-61.8	99.9	264.2	30.3	30.1	3.0	363.7	999.9	99.9	999.9	63.6	72.
52.9	129.0	15115.7	125.0	-64.2	99.9	283.3	20.8	20.3	-4.8	378.7	999.9	99.9	999.9	72.1	74.
57.5	137.3	16456.8	100.0	-72.8	99.9	275.6	18.4	18.3	-1.8	387.1	999.9	99.9	999.9	75.7	76.
63.3	146.0	18143.9	75.0	-72.9	99.9	220.5	1.5	1.0	1.2	420.0	999.9	99.9	999.9	79.9	77.
70.9	155.0	20587.8	50.0	-63.3	99.9	152.6	4.1	-1.9	3.7	494.4	999.9	99.9	999.9	79.3	77.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 248
SHREVEPORT, LA

7 MAY 1975

1115 GMT

159 20 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.8	79.0	997.6	22.8	21.6	180.0	3.2	0.0	3.2	298.4	341.6	16.6	93.0	0.0	0.0
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9
0.7	6.4	280.0	975.0	22.9	22.2	238.7	2.4	2.1	1.3	300.5	346.6	17.5	95.7	0.3	11.0
1.5	8.4	507.2	950.0	21.9	21.2	228.1	7.5	5.6	5.0	301.7	346.6	16.9	95.6	7.5	25.0
2.2	10.3	739.5	925.0	20.8	20.0	237.0	9.3	7.8	5.0	302.7	345.6	16.1	95.3	0.9	37.0
3.1	12.3	976.9	900.0	19.0	18.1	247.0	8.2	7.6	3.2	303.0	342.4	14.7	94.5	1.3	46.0
4.7	14.4	1219.3	875.0	17.2	16.4	245.8	8.4	7.7	3.5	303.5	340.0	13.6	94.7	1.7	51.0
4.9	16.4	1467.4	850.0	16.5	15.6	241.7	7.9	7.0	3.8	305.2	341.2	13.3	94.6	2.2	54.0
5.8	18.5	1721.8	825.0	14.5	13.6	237.1	9.0	7.6	4.9	305.6	338.4	12.0	94.3	2.6	54.0
6.7	20.7	1982.3	800.0	13.4	12.4	239.3	10.5	9.0	5.4	307.0	339.5	11.5	93.9	3.2	55.0
7.8	22.9	2250.1	775.0	12.9	10.6	237.3	11.8	9.9	6.4	309.0	338.2	10.5	86.3	3.9	56.0
8.7	25.2	2526.0	750.0	11.3	8.9	233.9	12.5	10.1	7.4	310.2	337.2	9.6	84.7	4.5	56.0
9.5	27.4	2809.1	725.0	9.2	7.4	236.7	13.3	11.1	7.3	310.8	336.3	9.0	88.5	5.2	55.0
10.5	29.6	3095.8	700.0	7.6	4.2	241.2	15.5	13.6	7.5	311.9	333.4	7.5	79.3	6.0	56.0
11.5	32.2	3359.7	675.0	6.4	-0.6	239.0	16.1	13.8	8.3	313.6	329.6	5.5	60.8	7.0	57.0
12.4	34.7	3708.2	650.0	3.7	-6.8	235.4	16.7	13.7	9.5	313.6	324.5	3.6	46.6	7.9	57.0
13.5	37.1	4026.2	625.0	3.9	-47.5	237.5	17.2	14.5	9.3	316.9	317.2	0.1	1.0	9.0	57.0
14.6	39.8	4356.6	600.0	2.1	-48.7	237.7	20.5	17.3	11.0	318.5	318.8	0.1	1.0	10.3	57.0
15.7	42.3	4698.5	575.0	-0.1	-50.0	237.2	19.4	16.3	10.5	319.9	320.1	0.1	1.0	11.6	57.0
17.0	45.2	5052.0	550.0	-3.3	-52.0	239.0	20.4	17.5	10.5	320.2	320.4	0.1	1.0	13.1	57.0
18.2	48.1	5417.5	525.0	-6.4	-54.0	240.1	21.3	18.4	10.6	320.6	320.8	0.0	1.0	14.6	57.0
19.4	50.9	5756.5	500.0	-9.7	-56.0	244.6	22.9	20.7	9.8	321.2	321.3	0.0	1.0	16.2	58.0
20.6	54.0	6190.4	475.0	-12.0	-57.5	245.6	22.4	20.4	9.3	323.1	323.2	0.0	1.0	17.9	58.0
21.9	57.3	6632.2	450.0	-14.4	-59.0	246.4	20.0	18.3	8.0	325.1	325.2	0.0	1.0	19.5	59.0
23.1	60.4	7032.9	425.0	-17.8	-61.3	250.5	19.3	18.2	6.4	326.0	326.1	0.0	1.0	20.9	60.0
24.5	63.9	7482.5	400.0	-21.9	-63.9	252.1	19.9	19.0	6.1	326.4	326.5	0.0	1.0	22.4	60.0
25.8	67.3	7953.6	375.0	-25.8	-66.4	254.8	21.0	20.2	5.5	327.3	327.4	0.0	1.0	24.0	61.0
27.3	70.9	8448.6	350.0	-30.4	-61.7	260.4	21.8	21.5	3.6	327.6	327.7	0.0	3.0	25.9	63.0
28.8	74.8	8971.1	325.0	-34.5	-53.4	262.6	26.9	26.6	3.5	329.1	329.4	0.1	12.5	27.9	64.0
30.5	79.2	9525.6	300.0	-39.0	99.9	255.5	31.9	30.9	8.0	330.4	999.9	99.9	999.9	30.7	65.0
32.5	83.4	10116.1	275.0	-44.0	99.9	255.7	31.6	30.6	7.8	331.5	999.9	99.9	999.9	34.6	66.0
34.5	87.8	10752.5	250.0	-46.6	99.9	269.9	27.7	27.7	6.0	336.8	999.9	99.9	999.9	38.0	68.0
37.0	93.0	11443.0	225.0	-51.7	99.9	279.1	22.6	22.3	-3.6	339.3	999.9	99.9	999.9	42.1	70.0
39.1	98.4	12197.6	200.0	-57.8	99.9	284.7	20.9	20.3	-5.3	341.3	999.9	99.9	999.9	43.9	72.0
41.7	104.3	13032.5	175.0	-61.4	99.9	269.9	28.2	28.2	0.0	348.5	999.9	99.9	999.9	47.4	74.0
44.4	111.0	13980.6	150.0	-65.0	99.9	265.6	27.4	27.4	2.1	358.1	999.9	99.9	999.9	52.1	75.0
47.8	118.7	15085.2	125.0	-67.3	99.9	258.8	36.7	36.0	7.2	373.2	999.9	99.9	999.9	59.1	76.0
52.4	127.7	16437.6	100.0	-66.6	99.9	260.2	27.5	27.1	4.7	395.1	999.9	99.9	999.9	68.8	75.0
57.4	138.0	18154.7	75.0	-69.7	99.9	314.3	3.0	2.2	-2.1	426.8	999.9	99.9	999.9	72.3	76.0
66.0	149.0	20627.9	50.0	-58.5	99.9	39.5	7.9	-5.0	-6.1	505.7	999.9	99.9	999.9	70.1	76.0
78.1	160.0	25048.0	25.0	-49.1	99.9	122.5	3.2	-2.7	1.7	643.5	999.9	99.9	999.9	66.9	76.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 250
BROWNSVILLE, TEX

7 MAY 1975
1115 GMT

164 18. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	4.7	7.0	1003.6	24.4	22.7	360.0	0.0	0.0	0.0	299.6	345.6	17.6	90.0	0.0	5.
0.1	5.0	38.6	1000.0	24.3	23.3	219.9	17.9	11.5	13.7	299.9	347.8	18.3	94.3	0.5	260.
0.7	6.9	261.5	975.0	23.6	23.4	216.0	15.4	9.1	12.4	301.5	351.4	19.0	99.1	0.3	292.
1.4	9.1	489.4	950.0	22.3	22.1	177.9	7.3	-7.3	7.3	302.3	349.8	18.0	98.8	0.5	342.
2.3	11.2	722.0	925.0	20.5	20.3	157.4	6.0	-2.3	5.5	302.5	346.3	16.5	98.5	0.9	343.
3.1	13.5	960.0	900.0	22.0	14.2	139.5	4.8	-3.2	3.6	305.8	337.6	11.7	64.5	1.1	340.
3.9	15.6	1206.4	875.0	24.5	4.6	149.2	4.2	-2.1	3.6	310.1	327.8	6.1	27.8	1.3	336.
4.7	17.9	1459.7	850.0	24.1	2.4	184.7	6.2	0.5	6.2	312.1	327.8	5.4	24.3	1.5	338.
5.5	20.2	1719.7	825.0	22.2	-6.9	199.9	6.5	2.2	6.1	312.6	324.9	4.2	20.4	1.8	344.
6.4	22.3	1985.2	800.0	20.4	-37.5	208.9	7.3	3.5	6.4	312.9	313.5	0.2	1.0	2.1	350.
7.2	25.0	2257.7	775.0	18.6	-0.7	217.8	8.3	5.1	6.6	314.5	328.5	4.7	27.2	2.4	356.
8.1	27.3	2537.8	750.0	16.7	-9.3	217.6	9.5	5.8	7.6	315.1	322.9	2.5	15.9	2.7	4.
9.1	29.9	2825.2	725.0	14.4	-4.2	206.7	10.2	4.6	9.1	315.2	327.6	3.9	27.5	3.3	9.
10.0	32.5	3120.5	700.0	12.1	-2.0	200.5	10.1	3.5	9.4	316.5	330.7	4.7	37.4	3.8	11.
11.1	35.2	3423.8	675.0	9.5	-0.6	208.1	11.2	5.3	9.9	317.0	333.3	5.5	49.2	4.5	12.
12.2	37.8	3735.6	650.0	7.5	-8.8	220.2	13.7	8.9	10.5	317.9	327.2	3.0	30.2	5.3	16.
13.2	40.5	4057.3	625.0	4.9	-8.1	226.0	14.0	10.0	9.7	318.5	328.8	3.3	38.1	6.1	20.
14.4	43.2	4388.7	600.0	2.2	-9.7	221.9	12.3	8.2	9.1	319.0	328.6	3.1	40.9	6.9	23.
15.4	46.2	4730.9	575.0	-0.6	-10.3	217.7	10.3	6.3	8.1	319.6	329.1	3.0	47.8	7.6	24.
16.6	49.3	5083.9	550.0	-4.2	-11.0	218.2	9.3	5.7	7.3	319.5	328.9	3.0	59.1	8.2	25.
17.7	52.1	5449.0	525.0	-7.5	-13.3	221.0	10.4	6.8	7.9	319.6	327.9	2.6	63.4	8.9	26.
19.0	55.3	5827.3	500.0	-10.4	-18.3	231.4	12.9	10.1	8.1	320.5	326.4	1.8	51.9	9.7	28.
20.1	58.5	6220.5	475.0	-12.6	-28.2	242.8	14.6	13.0	6.7	322.4	325.1	0.8	26.0	10.6	31.
21.5	62.0	6631.3	450.0	-14.8	-59.3	249.2	13.3	12.5	4.7	324.6	324.7	0.0	1.0	11.5	34.
22.9	65.4	7062.1	425.0	-17.3	-60.9	250.6	13.5	12.8	4.5	326.7	326.8	0.0	1.0	12.4	37.
24.4	69.0	7513.1	400.0	-20.5	-58.2	248.3	16.9	15.7	6.3	328.3	328.4	0.0	1.9	13.5	40.
26.0	72.7	7987.9	375.0	-24.1	-59.2	241.5	20.5	18.0	9.8	329.7	329.8	0.0	2.3	15.2	43.
27.6	76.6	8487.3	350.0	-28.0	-40.7	240.6	24.3	21.2	11.9	330.9	332.1	0.3	28.4	17.3	45.
29.3	80.6	9014.3	325.0	-32.5	-37.7	242.0	25.5	22.5	11.9	331.8	333.5	0.4	59.5	19.8	47.
31.3	85.0	9573.2	300.0	-36.8	-41.7	242.0	25.9	22.9	12.2	333.4	334.6	0.3	60.2	22.8	49.
33.2	89.3	10169.0	275.0	-42.1	99.9	243.7	31.0	27.8	13.7	334.3	999.9	99.9	999.9	25.9	51.
35.5	94.4	10807.0	250.0	-47.0	99.9	245.5	32.9	30.0	13.6	336.2	999.9	99.9	999.9	30.0	53.
37.9	99.4	11494.7	225.0	-53.1	99.9	249.2	34.6	32.3	12.3	337.1	999.9	99.9	999.9	34.9	55.
40.4	105.0	12247.4	200.0	-54.9	99.9	239.4	39.1	33.6	19.9	345.9	999.9	99.9	999.9	40.4	56.
43.3	111.0	13092.0	175.0	-59.5	99.9	242.7	40.6	36.0	18.6	351.7	999.9	99.9	999.9	46.9	57.
46.8	118.0	14046.6	150.0	-64.7	99.9	251.2	41.3	39.1	13.3	358.6	999.9	99.9	999.9	55.7	58.
50.5	125.5	15155.7	125.0	-67.3	99.9	257.1	22.2	21.6	5.0	373.2	999.9	99.9	999.9	62.2	61.
54.9	134.0	16464.7	100.0	-73.1	99.9	222.6	19.6	13.3	14.4	386.4	999.9	99.9	999.9	66.9	60.
60.3	143.0	18145.8	75.0	-76.4	99.9	215.5	9.3	5.4	7.6	412.8	999.9	99.9	999.9	70.3	58.
68.7	153.5	20605.2	50.0	-59.8	99.9	86.2	2.5	-2.5	-0.2	502.5	999.9	99.9	999.9	67.4	58.
80.7	164.0	25045.2	25.0	-51.3	99.9	104.6	1.5	-1.5	0.4	637.0	999.9	99.9	999.9	65.5	58.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 255
VICTORIA, TEX

MAY 1975
1115 GMT

165 20. C

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SFC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.3	33.0	1001.5	24.6	24.3	140.0	1.5	-1.0	1.1	300.2	351.1	19.5	98.0	0.0	0.
0.7	5.4	42.3	1000.0	24.5	24.2	999.9	99.9	99.9	99.9	307.3	351.1	19.4	98.3	999.9	999.
0.8	7.4	269.1	975.0	23.3	23.3	999.9	99.9	99.9	99.9	301.1	350.5	18.8	100.9	999.9	999.
1.6	9.6	496.9	950.0	22.6	22.4	999.9	99.9	99.9	99.9	302.5	350.8	18.2	98.9	999.9	999.
2.4	11.6	730.0	925.0	21.4	20.8	146.1	4.6	-2.6	3.9	303.5	348.7	17.0	96.2	0.5	340.
3.3	13.9	967.9	900.0	21.6	13.5	147.2	2.9	-1.6	2.5	305.3	335.3	11.0	60.7	0.8	337.
4.1	16.0	1212.9	875.0	22.5	4.0	121.3	2.4	-2.0	1.2	307.9	324.7	5.9	30.0	0.9	335.
5.0	18.4	1464.7	850.0	23.0	-35.9	133.5	2.5	-1.8	1.7	310.3	311.0	0.2	1.0	1.0	329.
5.9	20.6	1723.4	825.0	21.9	-36.6	51.5	0.7	-0.5	-0.4	311.8	312.5	0.2	1.0	1.1	328.
6.9	23.0	1988.1	800.0	19.6	-37.9	325.0	3.2	1.8	-2.6	312.1	312.7	0.2	1.0	1.0	325.
7.8	25.4	2260.1	775.0	18.2	-38.8	290.8	5.4	5.0	-1.9	313.4	314.0	0.2	1.0	0.7	332.
8.8	27.8	2538.8	750.0	15.9	-33.6	205.8	7.5	7.5	0.5	313.9	314.9	0.3	2.1	0.6	6.
9.7	30.3	2824.6	725.0	13.3	-32.5	247.6	8.6	8.0	3.3	314.1	315.3	0.3	2.6	0.9	36.
10.7	32.9	3118.2	700.0	11.5	-33.0	247.9	8.4	7.8	3.2	315.3	316.5	0.3	2.8	1.3	45.
11.7	35.5	3420.2	675.0	8.6	-33.9	256.1	7.9	7.7	1.0	315.3	316.4	0.3	3.1	1.8	53.
12.7	38.2	3730.2	650.0	5.9	-30.2	249.4	8.7	8.1	3.1	315.7	317.3	0.5	5.3	2.2	58.
13.6	40.8	4049.6	625.0	3.5	-27.7	237.4	10.3	8.7	5.6	316.5	318.7	0.6	8.0	2.8	59.
14.6	43.3	4378.7	600.0	0.6	-12.7	230.5	12.0	9.3	7.6	317.1	325.3	2.7	40.3	3.4	58.
15.7	46.9	4718.9	575.0	-2.2	-5.3	231.2	14.1	11.0	8.9	318.0	331.6	4.5	79.1	4.3	56.
16.8	49.9	5070.6	550.0	-5.2	-7.6	229.2	15.4	11.7	10.1	318.4	330.4	3.9	83.1	5.3	55.
17.9	52.8	5434.8	525.0	-8.0	-9.9	232.0	16.3	12.9	10.1	319.2	329.8	3.4	86.2	6.3	54.
19.1	55.8	5812.2	500.0	-11.2	-12.2	228.9	20.7	15.8	13.3	319.7	329.1	3.0	92.0	7.6	54.
20.4	59.1	6203.4	475.0	-15.1	-18.8	228.9	21.9	16.5	14.4	319.5	325.4	1.8	73.0	9.2	53.
21.6	62.7	6610.1	450.0	-17.8	-34.2	231.9	21.7	17.0	13.4	320.9	322.9	0.6	28.1	10.9	52.
22.9	66.0	7036.6	425.0	-19.4	-62.2	240.1	21.7	18.8	10.8	324.1	324.2	0.0	1.0	12.5	53.
24.2	69.8	7484.1	400.0	-22.3	-64.5	246.1	20.4	18.6	8.2	325.2	325.3	0.0	1.0	14.2	54.
25.8	73.4	7954.8	375.0	-25.8	-48.0	247.6	23.5	21.7	8.9	327.3	327.8	0.1	10.4	16.2	56.
27.3	77.5	8449.5	350.0	-30.8	-41.5	252.5	26.1	24.9	7.8	327.2	328.3	0.3	33.7	18.3	57.
29.1	81.6	8971.7	325.0	-34.6	-40.4	249.3	31.0	29.0	11.0	328.9	330.1	0.3	55.3	21.3	59.
31.0	85.9	9525.7	300.0	-38.9	-42.3	248.1	35.1	32.6	13.1	330.5	331.6	0.3	69.5	25.1	61.
33.3	90.6	10115.9	275.0	-44.2	99.9	246.5	35.9	32.9	14.3	331.2	999.9	99.9	999.9	29.9	62.
35.8	95.5	10748.1	250.0	-49.0	99.9	247.9	40.3	37.3	15.2	333.3	999.9	99.9	999.9	35.8	63.
38.6	100.8	11434.0	225.0	-53.0	99.9	250.3	41.2	38.8	13.9	337.4	999.9	99.9	999.9	42.1	64.
41.4	106.5	12185.6	200.0	-56.9	99.9	247.0	45.5	41.9	17.8	342.7	999.9	99.9	999.9	49.5	65.
44.9	112.8	13329.4	175.0	-57.5	99.9	246.0	40.5	37.0	16.5	355.1	999.9	99.9	999.9	59.0	65.
48.5	119.7	13996.5	150.0	-61.3	99.9	252.7	37.2	35.5	11.1	364.6	999.9	99.9	999.9	67.2	65.
52.8	127.3	15124.9	125.0	-62.6	99.9	246.8	19.9	18.3	7.9	381.7	999.9	99.9	999.9	76.2	66.
57.9	136.0	16475.6	100.0	-70.1	99.9	225.4	18.9	13.5	13.3	392.4	999.9	99.9	999.9	82.2	65.
64.1	145.0	18157.3	75.0	-74.6	99.9	205.5	7.1	3.0	6.4	416.4	999.9	99.9	999.9	85.8	65.
73.1	155.5	20600.9	50.0	-61.4	99.9	85.9	3.7	-3.7	-0.3	498.8	999.9	99.9	999.9	84.0	64.
87.6	167.0	25022.0	25.0	-50.6	99.9	42.3	9.4	-6.3	-6.9	639.1	999.9	99.9	999.9	82.1	63.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 260
STEPHENVILLE, TEX

7 MAY 1975
1115 GMT

155 20. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.6	399.0	961.0	12.7	10.8	185.0	1.5	0.1	1.5	290.2	312.3	6.5	88.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.3	10.5	498.4	950.0	20.7	15.3	5.0	4.4	-0.4	-4.4	299.7	333.8	11.7	72.1	0.3	5.
1.2	12.7	729.8	925.0	21.4	13.7	999.9	99.9	99.9	99.9	302.7	331.8	10.7	61.3	999.9	999.
2.7	15.3	967.1	900.0	21.1	10.5	999.9	99.9	99.9	99.9	304.5	329.2	8.9	50.7	999.9	999.
2.7	17.1	1210.3	875.0	20.0	-3.8	999.9	99.9	99.9	99.9	305.0	314.6	3.3	19.7	999.9	999.
3.6	19.5	1459.1	850.0	18.5	-5.0	999.9	99.9	99.9	99.9	305.9	315.1	3.1	19.8	999.9	999.
4.4	21.7	1713.7	825.0	16.5	-6.5	999.9	99.9	99.9	99.9	306.5	314.9	2.8	19.5	999.9	999.
5.4	24.2	1974.4	800.0	14.6	-8.1	999.9	99.9	99.9	99.9	307.0	314.8	2.6	20.1	999.9	999.
6.2	26.5	2241.4	775.0	12.4	-9.2	999.9	99.9	99.9	99.9	307.5	314.9	2.5	21.1	999.9	999.
7.1	29.0	2515.3	750.0	11.2	-8.6	262.7	7.8	7.7	1.0	309.1	317.1	2.7	24.0	1.1	114.
8.1	31.7	2797.5	725.0	9.3	-9.2	239.6	9.4	8.1	4.8	310.0	317.9	2.6	26.0	1.5	98.
9.0	34.3	3087.2	700.0	7.2	-9.7	234.3	11.6	9.5	6.8	310.8	318.7	2.6	28.8	1.9	87.
10.0	36.9	3385.0	675.0	5.1	-10.7	234.7	14.5	11.8	8.4	311.6	319.3	2.5	30.9	2.6	78.
11.0	39.9	3691.8	650.0	2.8	-11.8	237.4	17.1	14.4	9.2	312.4	319.7	2.4	33.2	3.5	72.
12.0	42.3	4007.8	625.0	0.3	-13.8	240.2	18.2	15.8	9.1	313.1	319.6	2.1	33.6	4.6	69.
13.1	45.3	4333.3	600.0	-2.6	-15.1	243.0	18.4	16.4	8.3	313.3	319.5	2.0	37.5	5.8	67.
14.3	48.3	4669.0	575.0	-5.5	-17.8	244.6	17.5	15.8	7.5	313.7	319.9	1.6	37.2	7.1	67.
15.4	51.1	5016.1	550.0	-8.3	-21.6	239.1	17.6	15.1	9.0	314.3	319.3	1.2	33.4	8.3	66.
16.6	54.3	5375.6	525.0	-10.3	-29.1	230.2	19.3	14.9	12.4	316.1	318.2	0.6	19.5	9.5	65.
17.8	57.3	5745.2	500.0	-13.5	-30.9	230.2	20.6	15.8	13.2	316.6	318.5	0.6	21.3	10.9	63.
19.1	60.6	6137.5	475.0	-16.2	-34.7	233.0	25.5	20.3	15.3	318.0	319.4	0.4	18.4	12.6	61.
20.4	64.0	6542.7	450.0	-18.4	-37.3	231.6	28.7	22.5	17.8	320.1	321.3	0.3	17.0	14.8	60.
21.8	67.4	6967.2	425.0	-20.5	-43.0	234.2	29.9	23.4	16.9	322.6	323.4	0.2	11.3	17.1	59.
23.3	70.9	7413.3	400.0	-23.8	-43.5	236.4	31.8	26.5	17.6	324.0	324.7	0.2	14.2	19.9	58.
24.9	74.7	7880.9	375.0	-27.5	-46.4	237.4	34.5	29.1	18.6	325.1	325.7	0.2	14.6	23.0	58.
26.6	78.8	8373.6	350.0	-31.3	-49.3	241.3	38.5	33.8	18.5	326.5	326.9	0.1	14.9	26.9	58.
28.5	82.8	8893.3	325.0	-36.0	-51.8	240.1	38.0	33.0	19.0	327.0	327.4	0.1	17.5	31.1	59.
30.5	87.0	9444.1	300.0	-40.6	99.9	237.4	37.9	32.0	20.4	328.2	999.9	99.9	999.9	35.9	59.
32.8	91.5	10031.7	275.0	-44.4	99.9	237.6	44.9	37.9	24.0	330.9	999.9	99.9	999.9	41.5	59.
35.1	96.2	10664.3	250.0	-48.7	99.9	243.0	45.6	40.6	20.7	333.7	999.9	99.9	999.9	47.1	59.
37.8	101.2	11351.0	225.0	-52.6	99.9	244.9	48.1	43.6	20.4	338.0	999.9	99.9	999.9	55.6	60.
40.7	106.8	12105.2	200.0	-56.1	99.9	243.8	48.0*	43.0	21.2	343.9	999.9	99.9	999.9	63.9	60.
44.1	112.8	12955.1	175.0	-56.9	99.9	250.7	38.6*	36.3	13.2	356.1	999.9	99.9	999.9	72.4	61.
47.6	119.3	13927.5	150.0	-58.1	99.9	245.0	46.8*	42.4	19.7	369.9	999.9	99.9	999.9	82.4	62.
51.7	126.3	15075.7	125.0	-57.4	99.9	239.9	37.0*	32.0	18.5	391.1	999.9	99.9	999.9	92.1	62.
56.8	134.7	16461.7	100.0	-63.2	99.9	245.7	21.9*	19.9	9.0	405.6	999.9	99.9	999.9	102.9	62.
62.5	142.7	18198.8	75.0	-69.8	99.9	224.1	4.4*	3.7	3.1	426.6	999.9	99.9	999.9	137.0	62.
70.4	151.7	20670.2	50.0	-60.7	99.9	136.9	4.6	-3.2	3.4	500.5	999.9	99.9	999.9	104.5	61.
83.5	161.3	25110.7	25.0	-49.7	99.9	999.9	99.9	99.9	99.9	642.3	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 261
DEL RIO, TEX

7 MAY 1975
1115 GMT

162 25. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RM PCT	RANGE KM	AZ DG
0.0	8.6	314.0	969.5	22.6	19.8	80.0	2.6	-2.6	-0.5	300.4	340.5	15.2	84.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.7	10.4	491.6	950.0	21.8	20.7	195.3	3.8	1.0	3.7	301.6	345.1	16.5	93.4	0.4	284.
1.5	12.7	724.1	925.0	21.6	20.7	157.8	6.9	-2.6	6.3	303.7	348.9	16.9	94.8	0.5	319.
2.3	15.1	562.3	900.0	19.9	18.6	159.2	7.5	-2.7	7.0	304.0	344.9	15.2	92.6	0.9	322.
3.4	17.4	1206.2	875.0	19.9	14.2	158.5	9.3	-3.4	8.6	306.1	338.4	11.8	69.7	1.3	328.
4.3	20.0	1456.2	850.0	18.2	14.6	164.3	10.1	-2.7	9.7	306.8	347.8	12.4	79.5	1.9	332.
5.2	22.3	1712.1	825.0	15.8	14.3	170.4	9.9	-1.0	9.8	307.0	341.4	12.5	90.4	2.4	335.
6.1	25.0	1973.3	800.0	13.5	11.8	182.1	10.2	0.4	10.1	307.0	337.4	11.0	89.4	2.9	339.
7.2	27.4	2241.1	775.0	12.2	5.6	198.6	11.4	3.0	10.8	308.0	329.7	7.7	67.0	3.5	345.
8.0	30.1	2516.3	750.0	13.0	0.2	222.3	11.3	7.6	8.4	311.4	327.2	5.4	43.2	4.1	350.
9.1	32.6	2800.9	725.0	12.1	-13.5	245.4	11.9	10.8	4.9	313.0	318.8	1.9	15.2	4.3	359.
10.2	35.7	3093.3	700.0	9.6	-13.8	247.8	11.7	10.8	4.4	313.3	319.2	1.9	17.7	4.7	9.
11.3	38.4	3393.3	675.0	6.7	-13.8	245.8	11.0	10.0	4.5	313.4	319.5	1.9	21.5	5.1	16.
12.5	41.3	3701.2	650.0	3.7	-13.3	242.2	10.4	9.2	4.9	313.4	320.0	2.1	27.5	5.6	22.
13.6	44.3	4018.1	625.0	0.8	-13.0	235.3	11.2	9.2	6.4	313.6	320.6	2.3	34.9	6.2	26.
14.8	47.4	4344.3	600.0	-2.3	-12.0	224.1	14.6	10.2	10.5	313.8	321.6	2.5	47.3	7.1	29.
16.2	50.4	4681.1	575.0	-4.2	-14.7	218.0	19.7	12.2	15.6	315.4	322.1	2.2	43.9	8.4	30.
17.4	53.6	5030.9	550.0	-5.2	-35.9	222.3	23.8	16.0	17.6	317.9	319.0	0.3	7.0	10.1	32.
18.7	56.6	5393.9	525.0	-8.3	-52.3	229.8	23.6	18.0	15.2	318.4	318.7	0.1	1.4	12.0	34.
20.0	60.0	5769.9	500.0	-11.5	-52.4	212.4	22.6	17.9	13.8	318.9	319.1	0.1	1.8	13.6	36.
21.3	63.7	6160.8	475.0	-14.5	-52.9	231.3	24.9	19.4	15.5	320.0	320.2	0.1	2.2	15.3	38.
22.6	67.1	6569.7	450.0	-15.7	-59.9	231.7	24.4	19.2	15.1	323.4	323.5	0.0	1.0	17.2	40.
24.1	70.9	6997.9	425.0	-19.2	-62.1	231.5	25.4	19.9	15.8	324.3	324.4	0.0	1.0	19.4	41.
25.8	74.7	7445.1	400.0	-23.2	-64.7	230.1	26.5	20.3	17.0	324.8	324.9	0.0	1.0	22.0	42.
27.5	78.8	7913.7	375.0	-27.2	-59.0	230.8	29.7	23.0	18.8	325.5	325.6	0.0	3.1	25.0	43.
29.3	82.5	8406.3	350.0	-31.4	-57.2	238.4	31.8	27.1	16.7	326.4	326.5	0.0	5.8	28.1	44.
31.1	87.0	8926.4	325.0	-35.5	-52.8	241.9	36.8	32.5	17.4	327.7	328.0	0.1	14.9	31.7	46.
33.0	91.8	9477.2	300.0	-40.7	99.9	238.7	38.6	33.0	20.1	328.1	999.9	99.9	999.9	36.0	48.
35.1	96.6	10063.8	275.0	-45.2	99.9	238.3	41.2	35.1	21.6	329.8	999.9	99.9	999.9	40.6	49.
37.2	101.6	10696.5	250.0	-48.3	99.9	243.0	43.0	38.3	19.5	334.3	999.9	99.9	999.9	46.0	51.
39.7	107.3	11382.9	225.0	-53.5	99.9	242.9	41.5	36.9	18.9	336.5	999.9	99.9	999.9	52.4	52.
42.3	113.0	12130.7	200.0	-59.1	99.9	244.2	44.5	40.0	19.4	339.3	999.9	99.9	999.9	59.0	53.
45.2	119.3	12969.0	175.0	-58.3	99.9	242.3	44.6	39.5	20.8	353.7	999.9	99.9	999.9	66.6	54.
48.6	126.3	13943.4	150.0	-57.9	99.9	241.5	47.2*	41.5	22.5	370.3	999.9	99.9	999.9	75.6	55.
52.4	134.0	15088.5	125.0	-59.2	99.9	237.3	24.1*	20.3	13.0	387.8	999.9	99.9	999.9	84.4	56.
56.8	141.7	16453.8	100.0	-67.8	99.9	230.4	22.6*	17.4	14.4	396.8	999.9	99.9	999.9	91.5	55.
62.1	150.3	18149.0	75.0	-73.8	99.9	189.6	6.0*	1.0	5.9	418.1	999.9	99.9	999.9	96.6	55.
69.7	159.5	20614.3	50.0	-62.5	99.9	90.0	9.4	-9.4	0.1	496.3	999.9	99.9	999.9	96.6	55.
81.4	169.0	25022.1	25.0	-51.7	99.9	999.9	99.9	99.9	99.9	636.1	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 265
MIDLAND, TEX

7 MAY 1975
1115 GMT

153 13. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	11.5	873.0	910.9	9.4	-0.5	240.0	3.2	2.8	1.6	290.7	301.9	4.1	50.0	0.0	7.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.3	12.4	975.3	900.0	17.8	3.2	267.9	3.2	3.2	0.1	300.6	316.4	5.7	40.8	0.1	69.
1.2	14.5	1216.3	875.0	18.1	-3.7	278.7	3.8	3.8	-0.6	303.0	312.7	3.3	22.5	0.3	81.
2.0	16.5	1463.2	850.0	16.0	-5.3	281.6	4.6	4.5	-1.9	303.4	312.2	3.0	22.6	0.5	90.
2.9	18.4	1715.9	825.0	14.6	-6.5	274.5	5.2	5.2	-0.4	304.4	312.8	2.9	22.7	0.7	95.
3.9	20.8	1975.0	800.0	13.0	-7.8	267.6	7.9	7.9	0.3	305.3	313.2	2.7	22.7	1.1	93.
4.8	23.1	2240.5	775.0	11.0	-8.4	252.9	8.6	8.3	2.5	305.9	313.7	2.6	24.7	1.6	89.
5.4	25.4	2512.7	750.0	8.3	-9.4	243.5	8.2	7.4	3.7	305.9	313.4	2.5	27.4	2.0	85.
6.7	27.7	2791.1	725.0	5.5	-10.3	237.5	6.9	5.8	3.7	305.8	313.2	2.5	31.6	2.4	79.
7.7	30.1	3076.6	700.0	2.9	-9.5	229.0	7.7	5.8	5.0	306.0	313.9	2.6	39.4	2.8	76.
8.8	32.7	3370.2	675.0	0.9	-9.6	215.6	10.0	5.8	8.1	307.0	315.2	2.7	45.1	3.3	71.
9.9	35.3	3672.4	650.0	-1.5	-9.5	206.6	12.2	5.5	10.9	307.6	316.2	2.9	54.4	3.9	64.
11.0	37.8	3983.7	625.0	-3.6	-7.9	207.0	15.8	7.2	14.0	308.8	318.8	3.4	71.9	4.6	56.
12.1	40.4	4305.6	600.0	-5.6	-9.6	211.6	19.4	10.2	16.5	310.0	319.2	3.1	73.4	5.7	51.
13.2	43.0	4638.1	575.0	-7.9	-11.6	215.6	22.8	13.3	18.5	311.0	319.3	2.7	74.5	7.0	48.
14.4	45.9	4982.3	550.0	-10.3	-20.8	220.7	24.0	15.7	18.2	312.0	316.2	1.3	41.8	8.7	46.
15.6	48.9	5339.3	525.0	-12.8	-27.9	229.5	26.1	19.9	17.0	313.0	315.5	0.7	26.8	10.6	45.
16.8	51.6	5710.0	500.0	-15.2	-32.1	233.8	27.6	22.3	16.3	314.5	316.2	0.5	21.9	12.4	47.
18.1	54.9	6095.5	475.0	-17.8	-34.3	234.5	28.6	23.3	16.6	315.9	317.4	0.4	22.0	14.6	48.
19.3	57.9	6497.4	450.0	-21.3	-35.3	239.3	27.3	23.5	13.9	316.5	317.9	0.4	26.9	16.7	49.
20.9	61.1	6915.6	425.0	-25.4	-37.9	241.1	28.2	24.7	13.6	316.4	317.6	0.3	29.9	19.1	50.
22.5	64.7	7352.7	400.0	-28.5	-40.6	240.2	32.6	28.3	16.2	317.9	318.8	0.3	29.8	22.0	52.
24.2	68.1	7812.6	375.0	-31.6	-44.0	238.3	34.9	29.7	18.3	319.7	320.4	0.2	28.0	25.3	53.
25.9	71.7	8259.8	350.0	-33.2	-46.7	239.7	41.6	35.9	21.0	323.9	324.5	0.2	24.1	29.3	54.
27.6	75.7	8815.8	325.0	-37.4	-50.3	242.2	44.7	39.5	20.9	325.0	325.4	0.1	24.3	33.6	54.
29.5	80.0	9363.5	300.0	-41.8	99.9	241.3	44.9	39.4	21.6	326.5	999.9	99.9	999.9	34.0	55.
31.8	84.2	9948.0	275.0	-45.6	99.9	240.8	45.8	40.0	22.4	329.2	999.9	99.9	999.9	45.0	56.
34.1	88.8	10576.6	250.0	-50.4	99.9	237.8	49.0*	41.4	26.1	331.1	999.9	99.9	999.9	51.4	57.
36.8	94.0	11257.4	225.0	-54.7	99.9	236.8	49.8*	41.7	27.2	334.7	999.9	99.9	999.9	59.2	57.
39.8	99.4	12010.4	200.0	-55.7	99.9	236.2	49.3*	42.4	25.2	344.5	999.9	99.9	999.9	68.4	57.
43.0	105.3	12859.8	175.0	-56.0	99.9	240.4	39.4*	34.3	19.5	357.4	999.9	99.9	999.9	76.8	57.
46.6	111.7	13835.0	150.0	-58.1	99.9	248.7	36.6*	34.1	13.3	370.0	999.9	99.9	999.9	84.8	58.
50.7	119.0	14991.1	125.0	-58.2	99.9	230.4	28.9*	22.3	18.4	364.7	999.9	99.9	999.9	92.9	58.
56.1	127.7	16364.0	100.0	-65.7	99.9	235.2	27.7*	22.7	15.8	400.8	999.9	99.9	999.9	103.9	58.
61.8	137.0	18099.5	75.0	-67.7	99.9	261.0	2.8*	2.8	0.4	431.1	999.9	99.9	999.9	110.4	58.
70.7	147.0	20590.4	50.0	-59.8	99.9	81.7	4.2*	-4.1	-0.6	502.7	999.9	99.9	999.9	108.1	57.
85.1	158.0	25038.0	25.0	-48.8	99.9	240.3	5.9	5.1	2.9	644.4	999.9	99.9	999.9	104.6	57.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

14P

STATION NO. 270
EL PASO, TEX

7 MAY 1975
1115 GMT

145 12. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	16.4	1193.0	879.0	11.4	-14.3	320.0	2.6	1.7	-2.0	245.4	299.7	1.4	15.0	0.0	0.0
99.9	99.9	99.9	1300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.1	16.7	1231.2	875.0	12.4	-11.2	237.0	0.2	0.1	0.1	296.9	302.5	1.9	18.2	0.2	79.
0.8	15.1	1474.0	850.0	11.7	-10.0	296.3	2.3	2.0	-1.0	298.7	304.9	2.1	20.7	0.3	137.
1.4	21.4	1722.6	825.0	9.5	-11.8	303.4	10.0	8.3	-5.5	298.9	304.4	1.9	20.8	0.5	132.
2.1	23.8	1976.7	800.0	7.6	-13.4	292.8	13.4	12.4	-5.2	299.5	304.5	1.7	20.9	1.0	127.
2.8	26.0	2237.4	775.0	6.7	-14.1	274.1	14.1	14.0	-1.0	301.2	306.2	1.7	20.9	1.6	118.
3.8	28.7	2505.7	750.0	4.7	-14.2	256.8	17.0	16.5	3.9	301.9	307.0	1.7	23.8	2.4	105.
4.7	31.3	2780.8	725.0	2.7	-12.9	248.7	16.7	15.5	6.1	302.6	308.5	2.0	30.6	3.3	97.
5.9	34.0	3063.5	700.0	1.0	-16.6	247.8	18.6	17.2	7.0	303.7	309.3	1.5	25.4	4.4	88.
7.3	36.4	3355.8	675.0	0.5	-22.0	257.6	17.9	17.5	3.9	306.3	309.4	1.0	16.5	5.8	85.
8.4	39.3	3657.3	650.0	-1.5	-23.5	259.0	18.5	18.2	3.5	307.4	310.2	0.9	16.7	7.0	84.
9.5	41.9	3968.3	625.0	-3.7	-25.2	259.1	20.0	19.7	3.8	308.3	310.8	0.8	16.8	8.3	83.
10.4	44.8	4289.2	600.0	-6.1	-27.1	259.3	19.8	19.5	3.7	309.1	311.3	0.7	17.0	9.4	82.
11.3	47.8	4620.7	575.0	-8.6	-29.1	258.1	20.4	20.0	4.2	309.9	311.9	0.6	17.2	10.5	82.
12.3	50.7	4963.5	550.0	-11.3	-31.2	255.8	21.5	20.8	5.3	310.7	312.4	0.5	17.4	11.7	82.
13.3	53.8	5318.4	525.0	-14.1	-33.4	251.3	23.0	21.8	7.4	311.5	313.0	0.4	17.6	13.1	81.
14.4	56.6	5687.0	500.0	-16.4	-35.6	246.7	23.8	21.9	9.4	313.0	315.6	0.3	17.3	14.6	80.
15.8	60.0	6070.8	475.0	-18.8	-37.3	246.1	28.1	25.7	11.4	314.7	316.5	0.5	29.1	16.7	78.
17.1	63.3	6471.4	450.0	-22.2	-39.6	242.3	28.5	25.2	13.3	315.3	317.0	0.5	34.7	18.9	76.
18.6	66.7	6888.4	425.0	-26.2	-41.6	241.3	30.6	26.8	14.7	315.4	316.9	0.4	40.4	21.3	74.
19.9	70.2	7323.6	400.0	-30.4	-43.6	241.1	30.5	26.7	14.7	315.5	316.9	0.4	54.8	23.9	73.
21.4	73.7	7779.1	375.0	-33.3	-45.3	240.9	33.6	29.4	16.4	317.4	318.3	0.2	40.1	26.5	72.
23.0	77.7	8261.1	350.0	-36.6	-47.8	243.6	36.5	32.7	16.2	319.3	320.1	0.2	41.9	29.8	71.
24.6	81.5	8770.3	325.0	-39.8	-49.9	242.8	40.1	35.6	18.3	321.9	999.9	99.9	999.9	33.5	70.
26.5	85.7	9313.8	300.0	-43.2	-52.9	243.4	48.2	43.1	21.6	324.6	999.9	99.9	999.9	38.5	69.
28.5	90.0	9896.4	275.0	-46.4	-55.6	243.4	50.6	45.2	22.7	328.0	999.9	99.9	999.9	44.3	68.
30.6	94.6	10522.4	250.0	-51.4	-59.9	243.2	52.2*	46.6	23.5	329.7	999.9	99.9	999.9	50.8	68.
32.9	99.2	11200.1	225.0	-55.5	-64.9	242.7	55.8*	49.6	25.6	333.4	999.9	99.9	999.9	57.9	67.
35.7	104.4	11946.3	200.0	-57.5	-69.9	241.7	49.6*	43.7	23.5	341.8	999.9	99.9	999.9	65.9	66.
38.7	110.2	12791.1	175.0	-57.4	-69.9	245.5	33.0*	30.1	13.7	355.2	999.9	99.9	999.9	74.5	66.
42.0	116.0	13761.4	150.0	-58.4	-69.9	244.4	42.9*	38.7	18.6	369.4	999.9	99.9	999.9	82.3	66.
46.2	123.0	14998.6	125.0	-58.4	-69.9	245.4	36.6*	33.3	15.2	399.2	999.9	99.9	999.9	91.5	66.
51.2	130.5	16321.5	100.0	-57.5	-69.9	251.5	14.3*	13.6	4.6	416.7	999.9	99.9	999.9	99.1	66.
56.7	138.7	18084.1	75.0	-69.1	-69.9	214.4	2.9*	1.0	2.4	428.1	999.9	99.9	999.9	102.9	65.
64.5	146.7	20584.6	50.0	-61.7	-69.9	112.0	5.3*	-4.9	2.0	498.2	999.9	99.9	999.9	103.7	65.
76.6	155.3	25002.7	25.0	-51.9	-69.9	3.8	2.2	-0.1	-2.2	635.9	999.9	99.9	999.9	101.2	65.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 327
NASHVILLE, TENN

7 MAY 1975
1115 GMT

160 18. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.5	180.0	989.6	16.6	16.6	150.0	3.6	-1.8	3.1	292.2	323.4	12.1	100.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	99.9	999.9	999.9	999.
0.5	7.7	307.6	975.0	17.8	17.6	292.4	3.6	3.3	-1.4	294.9	329.0	13.1	98.4	0.4	347.
1.3	9.9	530.6	950.0	17.3	16.1	256.7	3.4	3.3	0.8	296.4	328.6	12.3	92.7	0.4	10.
2.3	11.9	758.9	925.0	16.5	13.7	255.1	2.8	2.7	0.7	297.6	326.2	10.8	83.8	0.5	31.
3.4	13.9	992.2	900.0	15.5	11.9	235.1	2.4	2.0	1.4	298.8	325.1	9.8	79.5	0.6	40.
4.5	15.9	1231.3	875.0	14.0	11.7	202.4	2.6	1.0	2.4	299.6	326.4	10.0	86.3	0.8	40.
5.8	18.1	1475.4	850.0	11.7	9.1	115.0	0.9	-0.9	0.4	299.5	322.9	8.6	84.2	0.9	34.
7.0	20.4	1725.5	825.0	11.1	7.1	315.5	1.4	1.0	-1.0	301.4	322.5	7.7	76.1	0.8	36.
8.2	22.5	1982.6	800.0	10.1	6.4	253.5	2.0	1.9	0.6	302.9	323.8	7.6	77.5	0.9	43.
9.3	24.9	2245.8	775.0	7.1	4.0	239.3	3.3	2.9	1.7	302.3	320.7	6.6	80.3	1.0	45.
10.3	27.1	2515.3	750.0	5.8	4.2	253.0	6.8	6.5	2.0	303.7	323.0	6.9	89.4	1.3	49.
11.5	29.6	2793.1	725.0	4.6	3.0	259.9	9.8	9.7	1.7	305.4	323.9	6.6	88.9	1.9	58.
12.6	32.2	3078.4	700.0	2.6	1.8	254.3	10.3	9.9	2.8	306.2	324.0	6.3	94.5	2.5	64.
13.6	34.8	3372.3	675.0	0.6	0.3	248.5	10.1	9.4	3.7	307.0	323.6	5.8	97.8	3.2	65.
14.8	37.2	3675.0	650.0	-0.6	-0.9	257.0	9.7	9.5	2.2	309.0	325.0	5.5	97.8	3.8	66.
16.1	40.0	3988.2	625.0	-2.3	-2.6	264.6	10.0	10.0	0.9	310.5	325.3	5.1	97.7	4.6	69.
17.4	42.6	4312.4	600.0	-3.8	-4.1	269.3	10.8	10.8	0.1	312.4	326.3	4.7	97.5	5.4	71.
18.8	45.4	4648.0	575.0	-5.4	-5.9	272.1	10.2	10.2	-0.4	314.1	327.0	4.3	96.7	6.2	74.
20.3	48.4	4996.1	550.0	-7.5	-8.2	271.3	10.2	10.2	-0.2	315.6	327.0	3.8	95.0	7.1	77.
21.7	51.3	5357.4	525.0	-9.5	-10.3	266.8	9.6	9.6	0.5	317.4	327.6	3.3	93.6	7.9	78.
23.0	54.4	5733.1	500.0	-12.0	-13.0	256.6	12.1	11.7	2.0	318.7	327.5	2.8	92.0	8.7	78.
24.4	57.5	6124.4	475.0	-14.3	-15.5	258.2	14.2	13.9	2.9	320.5	328.2	2.4	90.4	9.9	78.
25.7	60.9	6532.8	450.0	-16.8	-18.3	263.8	15.7	15.6	1.7	322.3	328.8	2.0	88.1	11.1	78.
27.3	64.4	6960.0	425.0	-19.8	-21.5	268.5	18.6	18.5	0.5	323.8	329.1	1.6	85.6	12.6	79.
28.7	67.9	7407.4	400.0	-23.0	-25.3	270.4	21.6	21.6	-0.2	325.2	329.3	1.2	81.2	14.4	80.
30.3	71.5	7877.3	375.0	-26.6	-29.5	270.0	22.8	22.8	-0.0	326.4	329.4	0.9	76.7	16.3	82.
31.7	75.5	8371.8	350.0	-30.5	-33.7	263.2	26.9	26.7	3.2	327.6	329.8	0.6	73.3	18.5	82.
33.2	79.8	8894.5	325.0	-34.5	-38.2	261.3	27.0	26.7	4.1	329.1	330.7	0.4	68.6	20.9	82.
34.8	84.0	9448.7	300.0	-39.3	-43.1	256.6	27.0	26.3	6.2	329.9	330.9	0.3	66.7	23.5	82.
36.5	88.4	10038.8	275.0	-44.1	-49.9	251.2	29.2	27.6	9.4	331.3	331.9	99.9	999.9	26.2	81.
38.0	93.4	10670.5	250.0	-49.7	-56.9	244.7	33.2	30.0	14.2	332.1	332.1	99.9	999.9	29.1	80.
39.9	98.8	11350.2	225.0	-56.2	-64.9	243.3	33.7	30.1	15.1	332.4	332.4	99.9	999.9	32.6	78.
42.0	104.3	12087.8	200.0	-62.4	-72.4	248.8	34.5	32.2	12.5	334.0	334.0	99.9	999.9	36.9	77.
44.0	110.6	12898.5	175.0	-68.4	-79.9	254.1	42.0	40.4	11.5	337.0	337.0	99.9	999.9	41.8	76.
46.7	117.3	13833.7	150.0	-61.2	-72.9	287.9	41.8	39.8	-12.8	364.7	364.7	99.9	999.9	49.0	78.
49.8	125.0	14962.7	125.0	-64.2	-76.9	293.7	24.7	22.7	-9.9	378.8	378.8	99.9	999.9	53.5	82.
54.1	133.5	16317.1	100.0	-64.2	-76.9	289.3	27.0	25.5	-8.9	403.8	403.8	99.9	999.9	59.0	84.
59.4	142.3	18078.7	75.0	-64.9	-76.9	325.0	12.2	7.0	-10.0	436.9	436.9	99.9	999.9	63.8	88.
66.7	152.0	20565.7	50.0	-64.2	-76.9	57.5	9.0	-7.6	-4.8	492.3	492.3	99.9	999.9	64.4	90.
79.1	162.0	24938.9	25.0	-52.5	-64.9	209.8	4.6	2.3	4.0	633.8	633.8	99.9	999.9	62.5	90.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 340
LITTLE ROCK, ARK

7 MAY 1975
1115 GMT

164 18. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	6.2	79.0	999.3	17.8	14.5	180.0	1.5	0.0	1.5	292.4	319.6	10.5	81.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
0.7	8.5	291.6	975.0	20.6	16.8	175.9	7.3	-0.5	7.2	297.6	330.4	12.5	78.9	0.2	356.
1.3	10.9	517.4	950.0	22.6	14.7	190.0	5.2	0.9	5.1	301.6	331.8	11.2	61.2	0.4	358.
2.1	13.5	749.7	925.0	21.4	14.7	237.0	4.1	3.4	2.2	302.7	332.5	11.0	62.8	0.6	10.
2.9	15.9	987.2	900.0	20.9	11.6	262.5	3.5	3.5	0.5	304.3	330.7	9.6	55.3	0.7	23.
3.7	18.6	1230.6	875.0	19.3	9.6	266.8	5.4	5.4	0.3	305.0	328.9	8.6	53.6	0.8	38.
4.4	21.1	1475.1	850.0	16.9	8.9	250.9	6.7	6.3	2.2	305.0	328.5	8.5	59.0	1.0	48.
5.1	23.8	1733.3	825.0	14.9	9.1	238.0	5.9	5.0	3.1	305.6	330.1	8.9	68.1	1.3	52.
5.9	26.3	1993.1	800.0	12.5	9.7	227.1	7.2	5.3	4.9	305.7	332.0	9.5	83.0	1.6	51.
6.7	29.2	2259.6	775.0	11.3	6.9	230.7	8.5	6.6	5.4	307.0	329.7	8.1	74.5	2.0	50.
7.5	32.1	2533.0	750.0	9.2	5.0	234.2	8.7	7.0	5.1	307.5	328.3	7.4	75.3	2.4	51.
8.3	35.1	2813.3	725.0	6.6	1.8	234.4	9.3	7.6	5.4	307.4	324.7	6.0	71.7	2.8	52.
9.0	37.8	3101.0	700.0	5.1	-2.9	236.5	10.3	8.6	5.7	308.7	321.7	4.4	56.3	3.2	52.
9.9	40.7	3397.0	675.0	3.1	-4.4	243.3	10.1	9.0	4.5	309.7	321.8	4.1	57.5	3.8	53.
10.6	43.8	3701.9	650.0	0.9	-3.8	252.9	9.5	9.1	2.8	310.5	323.7	4.5	71.3	4.2	54.
11.7	46.9	4016.1	625.0	-1.2	-4.9	261.3	12.0	11.9	1.8	311.6	324.1	4.2	75.8	4.7	56.
12.6	50.2	4341.2	600.0	-2.7	-11.6	259.0	15.9	15.6	3.0	313.3	321.3	2.6	50.3	5.5	61.
13.8	53.3	4677.2	575.0	-5.3	-14.5	256.8	19.2	18.7	4.4	314.1	320.8	2.2	48.2	6.8	64.
14.9	56.6	5024.5	550.0	-7.8	-17.0	257.1	19.5	19.0	4.4	315.0	320.9	1.8	47.8	8.0	66.
16.0	60.0	5385.3	525.0	-9.5	-38.9	251.9	21.2	20.1	6.6	317.0	317.9	0.2	6.9	9.3	67.
17.2	63.7	5760.6	500.0	-12.0	-28.6	247.6	24.3	22.5	9.3	318.5	320.9	0.7	23.7	10.9	68.
18.5	67.1	6151.1	475.0	-14.5	-25.4	248.8	25.5	23.8	9.2	320.1	323.7	1.1	41.6	12.9	68.
20.0	70.9	6558.7	450.0	-17.6	-26.7	249.4	27.1	25.4	9.5	321.2	324.4	1.0	45.0	15.3	68.
21.6	74.8	6985.1	425.0	-19.8	-43.8	249.0	27.2	25.4	9.8	323.6	324.3	0.2	10.0	17.9	68.
22.9	78.8	7431.9	400.0	-22.8	-54.4	248.4	28.0	26.0	10.3	325.3	325.6	0.1	3.9	20.0	58.
24.2	82.8	7901.9	375.0	-26.4	-57.0	255.8	28.6	27.7	7.0	326.6	326.8	0.0	3.7	22.3	68.
25.8	87.0	8396.1	350.0	-30.5	-58.9	259.9	33.0	32.5	5.8	327.6	327.7	0.0	4.3	25.1	70.
27.4	91.8	8917.3	325.0	-35.3	-46.9	258.9	35.5	34.8	6.8	327.9	328.5	0.2	29.8	28.2	71.
28.9	96.3	9470.9	300.0	-38.5	-42.1	251.3	38.2	36.2	12.2	331.1	332.3	0.3	68.2	31.6	71.
30.9	101.4	10062.8	275.0	-42.9	99.9	243.4	34.6	30.9	15.5	333.1	999.9	99.9	999.9	36.1	71.
33.1	106.8	10698.6	250.0	-48.0	99.9	239.2	40.0	34.4	20.5	334.7	999.9	99.9	999.9	41.0	70.
35.2	112.3	11383.5	225.0	-53.6	99.9	242.2	42.6	37.7	19.9	336.5	999.9	99.9	999.9	45.9	68.
37.7	118.3	12132.0	200.0	-58.8	99.9	245.3	50.1	45.5	21.0	339.7	999.9	99.9	999.9	52.3	68.
40.7	124.8	12963.8	175.0	-60.6	99.9	258.1	36.1	35.3	7.5	350.0	999.9	99.9	999.9	60.9	68.
44.0	131.3	13918.0	150.0	-63.0	99.9	256.6	42.4	41.3	9.9	361.6	999.9	99.9	999.9	67.7	69.
48.1	138.3	15040.6	125.0	-62.1	99.9	266.7	33.3	33.3	1.9	382.6	999.9	99.9	999.9	77.8	71.
53.0	145.3	16420.2	100.0	-63.6	99.9	274.7	29.0	28.9	-2.4	405.0	999.9	99.9	999.9	86.9	73.
58.0	152.3	18175.5	75.0	-66.4	99.9	299.2	4.1	3.6	-2.0	433.8	999.9	99.9	999.9	90.7	74.
65.8	159.7	20635.3	50.0	-63.5	99.9	23.3	6.8	-2.7	-6.2	494.0	999.9	99.9	999.9	91.4	75.
78.5	167.0	25023.8	25.0	-50.7	99.9	999.9	99.9	99.9	99.9	638.8	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 349
MONETTE, MO

7 MAY 1975
1119 GMT

159 11. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIP DG	SPEED M/SEC	U COMP M/SEC	V CCMF M/SLC	POT T DG K	E POT T DG K	MX RTO GM/KG	PH PCT	RANGE KM	AZ DG
0.0	8.3	438.0	958.3	14.9	14.4	130.0	2.6	-2.0	1.7	293.0	321.3	10.9	97.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.9
0.2	9.0	512.1	950.0	16.5	16.3	999.9	99.9	99.9	99.9	295.6	327.9	12.4	98.3	999.9	999.9
1.2	11.1	741.0	925.0	17.7	14.2	999.9	99.9	99.9	99.9	298.9	328.6	11.1	79.9	999.9	999.9
2.2	13.5	975.6	900.0	17.2	10.8	999.9	99.9	99.9	99.9	300.5	325.1	9.1	65.9	999.9	999.9
3.3	15.6	1216.3	875.0	16.3	8.9	999.9	99.9	99.9	99.9	301.8	324.3	8.2	61.4	999.9	999.9
4.2	18.0	1462.5	850.0	14.9	7.5	999.9	99.9	99.9	99.9	302.8	324.0	7.7	61.0	999.9	999.9
5.3	20.4	1714.8	825.0	13.0	5.1	999.9	99.9	99.9	99.9	303.3	322.0	6.7	58.5	999.9	999.9
6.2	22.7	1972.8	800.0	11.4	-0.1	999.9	99.9	99.9	99.9	303.9	317.5	4.8	45.1	999.9	999.9
7.2	25.2	2237.5	775.0	9.5	-1.8	255.5	4.2	4.0	1.0	304.6	317.2	4.4	45.2	1.3	112.
8.2	27.6	2508.7	750.0	7.7	-9.6	260.1	5.1	5.0	0.9	305.3	312.6	2.5	28.1	1.5	108.
9.4	30.2	2796.7	725.0	5.4	-11.8	247.5	7.7	7.2	3.0	305.6	312.0	2.1	27.7	1.9	101.
10.4	32.8	3072.1	700.0	2.9	-11.4	240.5	9.9	8.6	4.9	306.0	312.9	2.3	33.9	2.4	93.
11.5	35.5	3365.2	675.0	0.3	-11.6	233.7	10.5	8.9	5.6	306.2	313.3	2.3	40.5	3.0	85.
12.7	38.1	3666.3	650.0	-1.5	-23.7	236.3	13.2	11.0	7.3	307.3	310.1	0.9	16.6	3.7	79.
13.9	40.9	3978.8	625.0	-1.5	-29.7	232.9	17.0	13.6	10.2	310.8	312.6	0.5	9.4	4.7	74.
15.2	43.8	4303.0	600.0	-3.1	-31.0	232.1	19.8	15.6	12.2	312.5	314.1	0.5	9.4	6.1	69.
16.4	46.8	4638.5	575.0	-5.1	-32.3	231.5	20.3	15.9	12.6	314.0	315.5	0.4	9.6	7.5	66.
17.6	49.8	4985.8	550.0	-7.8	-34.1	237.9	20.0	17.0	10.7	314.8	316.1	0.4	9.9	8.9	64.
18.8	52.6	5345.5	525.0	-10.5	-33.8	245.2	20.5	18.6	8.6	315.8	317.2	0.4	12.7	10.4	63.
20.3	55.7	5719.1	500.0	-13.2	-35.6	244.0	23.1	20.8	10.1	317.0	318.2	0.4	13.1	12.4	64.
21.7	59.0	6107.7	475.0	-15.4	-38.1	237.7	24.0	20.2	12.8	318.9	319.9	0.3	12.3	14.3	63.
23.3	62.3	6513.4	450.0	-18.6	-40.4	233.2	22.5	18.0	13.5	319.8	320.7	0.2	12.6	16.5	62.
23.0	65.8	6937.1	425.0	-21.8	-42.8	235.9	24.8	20.5	13.9	321.0	321.7	0.2	12.9	18.8	61.
26.4	69.3	7380.1	400.0	-25.7	-45.7	236.6	25.3	21.1	13.9	321.6	322.1	0.2	13.2	21.1	61.
28.1	72.8	7844.1	375.0	-29.5	-48.6	238.0	24.1	20.4	12.7	322.5	323.0	0.1	13.6	23.5	60.
30.0	76.8	8333.0	350.0	-32.7	-51.0	241.2	28.6	25.1	13.8	324.6	325.0	0.1	13.9	26.3	60.
31.8	80.7	8851.6	325.0	-36.4	-54.0	241.3	30.0	26.3	14.4	326.4	326.7	0.1	14.2	29.7	60.
33.8	85.0	9401.2	300.0	-40.9	99.9	244.7	30.3	27.4	13.0	327.7	999.9	99.9	999.9	33.3	61.
36.1	89.4	9986.3	275.0	-46.1	99.9	243.7	34.7	31.1	15.4	328.5	999.9	99.9	999.9	37.5	61.
38.3	94.0	10614.7	250.0	-49.8	99.9	244.3	40.3	36.3	17.5	332.1	999.9	99.9	999.9	42.7	61.
40.8	99.0	11296.7	225.0	-54.2	99.9	246.0	44.9	41.0	18.2	335.4	999.9	99.9	999.9	49.0	62.
43.6	104.3	12047.8	200.0	-56.4	99.9	246.9	37.6	34.6	14.8	343.4	999.9	99.9	999.9	56.4	63.
45.6	110.2	12893.2	175.0	-58.3	99.9	242.7	38.3	32.2	16.6	353.7	999.9	99.9	999.9	62.5	63.
50.0	116.3	13862.5	150.0	-58.5	99.9	243.9	31.8	28.6	14.0	369.2	999.9	99.9	999.9	68.4	63.
53.9	123.3	15007.6	125.0	-59.2	99.9	253.0	29.4	28.1	8.6	387.8	999.9	99.9	999.9	75.9	63.
58.3	131.0	16404.9	100.0	-59.5	99.9	276.5	19.7	19.6	-2.2	412.7	999.9	99.9	999.9	83.9	64.
64.2	139.7	18188.1	75.0	-64.5	99.9	283.9	5.9	5.7	-1.4	437.8	999.9	99.9	999.9	86.7	66.
71.8	146.0	20687.2	50.0	-61.1	99.9	80.1	1.7	-1.7	-0.3	499.5	999.9	99.9	999.9	87.1	66.
85.0	160.0	25108.1	25.0	-51.4	99.9	216.3	1.8	1.1	1.5	636.9	999.9	99.9	999.9	83.3	66.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

166

STATION NO. 353
OKLAHOMA CITY, OKLA

7 MAY 1975

1115 GMT

61 436. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	5.9	392.0	962.0	12.2	6.2	200.0	6.7	2.3	6.3	289.3	385.7	6.2	66.6	0.0	0.
99.9	99.9	99.9	1300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.4	10.8	497.5	950.0	14.2	99.9	52.4	10.1	-8.0	-6.2	291.6	999.9	99.9	999.9	0.4	338.
1.2	13.2	723.0	925.0	17.1	99.9	78.6	3.0	-2.9	-0.6	295.8	999.9	99.9	999.9	0.5	298.
2.1	15.5	957.3	903.0	19.2	99.9	253.0	2.8	2.7	0.8	301.3	999.9	99.9	999.9	0.5	311.
3.0	18.0	1197.5	875.0	17.0	99.9	283.4	2.1	2.1	-0.5	301.4	999.9	99.9	999.9	0.3	334.
3.9	20.5	1443.2	850.0	15.0	99.9	206.8	8.1	3.6	7.2	301.8	999.9	99.9	999.9	0.4	344.
4.9	23.0	1694.1	825.0	13.0	99.9	222.9	17.6	12.0	12.9	302.4	999.9	99.9	999.9	1.2	22.
6.0	25.5	1952.1	800.0	11.2	-0.6	212.5	10.8	5.8	9.1	303.7	316.8	4.6	43.8	2.1	27.
7.0	27.9	2215.9	775.0	8.9	-14.4	214.5	10.5	6.0	8.7	303.6	308.6	1.7	18.8	2.6	29.
7.9	30.6	2486.2	750.0	6.8	-5.9	221.4	10.5	6.9	7.9	304.4	314.0	3.3	40.0	3.2	30.
9.1	33.4	2763.7	725.0	4.5	-8.1	229.6	12.7	9.7	8.2	304.7	313.2	2.9	39.6	4.0	33.
10.2	36.0	3048.4	700.0	2.7	-10.2	235.7	15.6	12.9	8.8	305.8	313.3	2.5	37.9	4.9	37.
11.3	38.8	3341.4	675.0	0.9	-19.0	244.6	15.8	14.3	6.8	306.8	310.8	1.3	21.0	5.9	41.
12.6	41.5	3644.4	650.0	0.2	-18.2	247.5	20.1	18.6	7.7	309.3	313.6	1.4	23.6	7.1	46.
13.8	44.5	3957.3	625.0	-2.6	-13.2	247.6	24.5	22.7	9.4	309.8	316.6	2.2	43.9	8.7	50.
15.1	47.6	4279.9	600.0	-3.8	-22.9	243.6	24.2	21.6	10.8	311.8	315.0	1.0	21.1	10.6	53.
16.3	50.6	4614.9	575.0	-5.7	-24.4	234.5	21.6	17.6	12.5	313.4	316.4	0.9	21.2	12.2	54.
17.5	53.8	4961.3	550.0	-8.7	-26.8	226.6	18.6	13.5	12.7	313.8	316.4	0.8	21.5	13.6	53.
18.9	56.7	5319.8	525.0	-11.9	-29.4	226.8	16.7	12.2	11.5	314.2	316.3	0.6	21.7	15.0	53.
20.4	60.1	5691.3	500.0	-14.6	-31.6	226.9	14.0	10.2	9.6	315.2	317.0	0.5	21.9	16.5	52.
21.9	63.6	6077.7	475.0	-17.3	-33.1	232.2	22.9	18.1	14.1	316.5	318.2	0.5	23.8	17.7	52.
23.5	67.0	6481.1	450.0	-20.0	-34.8	999.9	99.9	99.9	99.9	318.1	319.6	0.4	25.2	999.9	999.
99.9	99.9	99.9	425.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	400.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	375.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	350.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	325.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	300.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	275.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	250.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	225.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	200.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	175.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	150.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	125.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	100.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	75.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG

* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED

** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 363
AMARILLO, TEX

7 MAY 1975
1115 GMT

149 19. 1

ANGLES ON THE HALF MINUTE HAVE BEEN LINEARLY INTERPOLATED FROM WHOLE MINUTE VALUES

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	PCT T DG K	E PDT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	14.3	1095.0	885.2	5.1	-9.8	250.0	3.2	3.0	-1.1	288.4	294.1	2.0	33.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	15.2	1190.9	875.0	10.1	-5.3	999.9	99.9	99.9	99.9	294.7	303.0	2.9	33.4	99.9	99.9
1.0	17.3	1432.2	850.0	10.3	-5.7	999.9	99.9	99.9	99.9	297.4	305.8	2.9	31.8	999.9	99.9
1.8	19.5	1600.1	825.0	9.2	-6.6	288.5	8.9	8.4	-2.8	296.7	306.9	2.8	31.8	1.0	120.
2.5	21.8	1934.4	800.0	7.8	-7.9	265.7	7.0	7.0	0.5	299.8	307.4	2.6	31.8	1.3	114.
3.3	24.2	2195.0	775.0	5.5	-9.9	241.1	7.5	6.6	3.6	300.1	306.9	2.3	31.8	1.6	107.
4.0	26.5	2462.4	750.0	4.2	-11.0	221.6	10.5	7.0	7.8	301.4	307.9	2.2	31.8	1.8	96.
4.9	29.0	2737.1	725.0	2.1	-12.9	215.9	12.6	7.4	10.2	302.1	307.9	2.0	31.8	2.2	82.
5.7	31.6	3019.2	700.0	-0.3	-15.1	225.5	14.5	10.4	10.2	302.3	307.4	1.7	31.8	2.7	74.
6.5	34.2	3305.2	675.0	-1.9	-16.4	228.5	17.9	13.4	11.8	303.8	308.5	1.6	31.8	3.5	68.
7.4	36.8	3618.2	650.0	-4.3	-18.5	235.6	20.3	16.7	11.5	304.3	308.5	1.4	31.8	4.5	64.
8.3	39.6	3915.9	625.0	-7.1	-20.6	238.9	22.7	19.5	11.7	304.4	308.1	1.2	33.0	5.6	63.
9.3	42.2	4232.8	600.0	-8.9	-23.0	236.1	26.7	22.2	14.9	305.9	309.1	1.0	30.5	7.1	62.
10.3	45.1	4561.6	575.0	-10.3	-24.8	231.7	29.2	22.9	18.1	308.0	310.9	0.9	29.1	8.9	60.
11.3	48.1	4903.2	550.0	-12.2	-26.9	227.5	30.9	22.8	20.9	309.7	312.1	0.8	27.9	10.6	58.
12.4	51.0	5257.1	525.0	-14.8	-29.2	223.8	34.8	24.1	25.1	310.7	312.8	0.6	28.0	12.6	56.
13.5	54.3	5624.3	500.0	-17.8	-31.8	221.1	35.0	23.0	26.4	311.4	313.1	0.5	26.0	15.3	54.
14.7	57.4	6005.9	475.0	-20.9	-34.5	224.2	34.3	23.9	24.6	312.1	313.6	0.4	28.1	17.4	52.
16.0	60.9	6402.8	450.0	-24.2	-36.4	229.7	35.5	27.0	23.0	312.8	314.1	0.4	31.2	20.1	52.
17.3	64.3	6816.8	425.0	-27.5	-37.8	235.4	37.6	31.0	21.4	313.8	315.0	0.3	36.4	23.0	52.
18.9	67.9	7251.4	400.0	-29.6	-35.3	237.5	38.6	32.5	20.7	316.5	318.1	0.5	57.8	26.4	52.
20.4	71.5	7708.2	375.0	-33.6	-38.3	239.8	39.7	34.3	20.0	317.0	318.3	0.4	62.6	30.1	53.
22.0	75.7	8187.7	350.0	-38.2	-42.0	238.3	39.2	33.3	20.6	317.1	318.1	0.3	67.5	34.0	54.
23.8	80.0	8693.6	325.0	-41.8	99.9	239.6	39.5	34.1	20.0	319.1	999.9	99.9	999.9	38.2	54.
25.6	84.3	9231.9	300.0	-46.0	99.9	242.6	45.2	40.1	20.8	320.5	999.9	99.9	999.9	42.6	55.
27.6	89.0	9855.3	275.0	-49.5	99.9	243.7	45.9*	41.1	20.3	323.5	999.9	99.9	999.9	47.6	56.
30.0	94.0	10426.7	250.0	-51.8	99.9	242.9	54.5*	48.6	24.9	329.0	999.9	99.9	999.9	54.8	57.
32.6	99.3	11108.1	225.0	-53.0	99.9	239.6	46.4*	40.0	23.4	337.2	999.9	99.9	999.9	62.8	58.
35.5	105.0	11865.0	200.0	-52.8	99.9	235.7	48.8*	40.3	27.4	349.2	999.9	99.9	999.9	69.4	58.
38.5	111.3	12735.8	175.0	-52.0	99.9	231.3	43.7*	34.1	27.3	364.1	999.9	99.9	999.9	77.8	57.
41.5	118.0	13722.6	150.0	-57.3	99.9	239.4	33.9*	29.2	17.3	371.3	999.9	99.9	999.9	84.6	57.
45.7	125.8	14274.6	125.0	-54.4	99.9	238.3	25.9*	22.0	13.6	396.6	999.9	99.9	999.9	91.9	57.
50.8	134.0	15298.0	100.0	-56.3	99.9	246.2	29.7*	27.1	12.0	418.5	999.9	99.9	999.9	100.8	58.
56.4	142.3	18074.2	75.0	-66.8	99.9	175.6	4.4*	-0.3	4.4	433.0	999.9	99.9	999.9	104.5	58.
64.8	151.0	20579.8	50.0	-60.1	99.9	141.0	2.7*	-1.7	2.1	501.9	999.9	99.9	999.9	102.9	56.
77.1	160.0	24987.5	25.0	-51.7	99.9	230.6	11.9	9.2	7.5	636.1	999.9	99.9	999.9	101.9	56.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

168

STATION NO. 365
ALBUQUERQUE, N MEX

7 MAY 1975
1115 GMT

144 14. G

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E PUT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	20.2	1619.0	834.0	-1.7	-12.6	200.0	2.6	0.9	2.4	286.1	291.0	1.7	43.0	0.0	0.0
99.9	99.9	99.9	1306.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.4	20.9	1706.3	825.0	3.6	-13.4	267.4	6.4	6.4	0.3	292.6	297.4	1.6	27.9	0.2	18.0
1.3	23.3	1956.4	800.0	3.8	-13.8	264.2	6.1	6.1	0.6	295.4	300.3	1.6	26.3	0.4	64.0
2.2	25.6	2213.7	775.0	2.3	-15.1	269.8	5.8	5.8	0.0	296.4	301.0	1.5	26.3	0.7	73.0
3.1	28.0	2477.0	750.0	-0.4	-17.3	273.6	7.0	7.0	-0.4	296.3	300.2	1.3	26.4	1.0	80.0
4.1	30.6	2746.9	725.0	-2.7	-19.3	285.0	8.7	8.4	-2.3	296.6	300.0	1.1	26.5	1.5	86.0
5.3	33.2	3023.7	700.0	-5.3	-20.5	283.4	13.4	13.0	-3.1	296.7	299.9	1.1	29.0	2.2	92.0
6.2	35.7	3317.9	675.0	-8.0	-21.0	283.2	14.0	13.6	-3.2	296.9	300.1	1.1	34.0	3.0	95.0
7.3	38.3	3599.8	650.0	-10.6	-22.8	286.5	15.4	14.8	-4.4	297.1	300.0	0.9	35.9	3.9	97.0
8.3	40.9	3900.0	625.0	-13.3	-22.6	286.7	16.9	16.2	-4.8	297.3	300.3	1.0	45.6	4.9	99.0
9.4	43.7	4209.9	600.0	-15.1	-24.8	281.5	18.7	18.4	-3.7	298.7	301.3	0.8	43.2	6.1	101.0
10.5	46.6	4529.9	575.0	-18.1	-24.0	275.5	20.2	20.1	-1.9	298.8	301.8	0.9	59.7	7.4	101.0
11.6	49.6	4860.2	550.0	-21.1	-24.8	267.9	21.2	21.2	0.8	299.1	302.0	0.9	72.0	8.8	99.0
12.9	52.5	5201.8	525.0	-23.9	-26.9	264.2	20.2	20.0	2.0	299.7	302.2	0.8	76.4	10.3	97.0
14.2	55.6	5555.7	500.0	-27.4	-29.8	261.6	20.5	20.3	3.0	299.6	301.7	0.6	79.8	11.9	95.0
15.5	58.8	5922.7	475.0	-30.4	-36.5	256.0	20.6	20.0	5.0	300.3	301.5	0.3	54.8	13.4	93.0
16.8	62.1	6305.2	450.0	-32.4	-41.2	258.0	26.6	26.0	5.5	302.5	303.3	0.2	40.9	15.1	91.0
18.1	65.5	6708.3	425.0	-32.8	-47.9	256.3	32.4	31.5	7.7	307.0	307.4	0.1	20.1	17.4	89.0
19.6	69.0	7134.4	400.0	-33.4	-49.1	256.8	36.5	35.5	8.3	311.5	311.9	0.1	16.7	20.4	87.0
21.4	72.6	7586.3	375.0	-35.0	-50.3	247.4	38.8	35.9	14.9	315.3	315.6	0.1	18.9	24.3	85.0
23.3	76.5	8065.3	350.0	-37.2	-52.2	251.6	43.0	40.8	13.6	318.5	318.8	0.1	19.1	29.2	82.0
25.2	80.5	8575.7	325.0	-38.9	-53.6	256.2	41.9	40.6	10.0	322.9	323.2	0.1	19.3	33.7	81.0
27.0	84.7	9121.3	300.0	-42.1	99.9	252.9	41.6	39.8	12.3	326.1	999.9	99.9	999.9	38.3	80.0
29.2	89.0	9706.0	275.0	-44.5	99.9	253.5	38.2	36.7	10.9	330.8	999.9	99.9	999.9	43.4	79.0
31.1	93.8	10339.6	250.0	-48.1	99.9	241.7	42.2*	37.2	20.0	334.6	999.9	99.9	999.9	47.9	78.0
33.7	98.9	11032.1	225.0	-46.9	99.9	249.1	37.8*	35.3	13.5	346.7	999.9	99.9	999.9	54.1	77.0
36.8	104.0	11807.1	200.0	-49.8	99.9	253.2	26.0*	24.9	7.5	353.9	999.9	99.9	999.9	59.6	76.0
39.8	110.0	12674.9	175.0	-52.5	99.9	249.7	24.0*	22.5	8.4	363.3	999.9	99.9	999.9	65.3	76.0
43.9	116.3	13671.9	150.0	-52.8	99.9	236.4	23.4*	19.5	13.0	379.1	999.9	99.9	999.9	71.3	75.0
48.3	123.7	14846.6	125.0	-55.0	99.9	243.5	26.4*	23.7	11.8	395.4	999.9	99.9	999.9	77.7	73.0
53.4	131.3	16269.4	100.0	-54.7	99.9	243.7	22.0*	19.7	9.7	422.0	999.9	99.9	999.9	85.5	72.0
59.6	140.0	18086.7	75.0	-62.2	99.9	184.6	8.4*	0.7	8.4	442.5	999.9	99.9	999.9	89.4	71.0
68.3	149.0	20603.5	50.0	-57.2	99.9	18.6	7.9	-2.5	-7.5	568.8	999.9	99.9	999.9	89.5	70.0
81.8	158.7	25024.5	25.0	-51.0	99.9	45.8	3.5	-2.5	-2.4	638.3	999.9	99.9	999.9	87.0	71.0

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
 * BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
 ** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

169

STATION NO. 433
SALEM, ILL

7 MAY 1975
1115 GMT

152 30. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	PCT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.3	5.5	175.0	990.9	16.9	16.6	110.0	1.5	-1.4	0.5	292.4	323.6	12.1	98.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.4	6.5	313.7	975.0	17.1	15.7	140.0	7.3	-4.7	5.6	293.9	324.1	11.6	91.9	0.2	291.
1.2	8.5	536.1	950.0	17.3	15.4	135.9	6.1	-4.2	4.3	296.3	327.0	11.7	88.6	0.5	376.
1.8	10.4	764.0	925.0	15.5	14.1	140.7	3.8	-2.4	2.9	296.6	325.8	11.1	91.6	0.7	378.
2.6	12.3	996.3	900.0	13.8	12.7	224.0	1.6	1.1	1.1	297.1	324.6	10.4	93.4	0.8	312.
3.4	14.4	1234.2	875.0	13.0	12.2	262.0	5.3	5.3	0.7	298.7	326.1	10.3	94.5	0.7	324.
4.2	16.3	1478.1	850.0	11.7	10.6	270.1	5.2	5.2	-0.0	299.7	325.3	9.5	92.6	0.6	348.
4.9	18.5	1728.2	825.0	10.8	9.5	272.8	2.8	2.8	-0.1	301.2	325.9	9.1	91.5	0.6	3.
5.7	20.6	1985.3	800.0	10.3	5.4	314.8	4.0	2.8	-2.8	303.0	322.8	7.1	72.1	0.5	16.
6.5	22.7	2248.9	775.0	8.4	2.1	313.5	7.7	5.6	-5.2	303.6	319.9	5.8	64.5	0.5	50.
7.4	25.0	2519.1	750.0	6.5	0.6	311.3	8.1	6.6	-5.4	304.3	319.5	5.4	66.2	0.7	94.
8.2	27.1	2797.0	725.0	5.0	-0.4	305.1	6.3	5.2	-3.6	305.6	320.3	5.1	68.1	1.1	105.
9.3	29.5	3182.9	700.0	3.1	-1.8	304.5	4.8	3.9	-2.7	306.5	320.4	4.8	70.5	1.4	109.
10.3	31.9	3376.7	675.0	1.0	-3.1	305.7	4.8	3.9	-2.8	307.3	320.5	4.5	74.3	1.6	111.
11.3	34.4	3679.6	650.0	-1.0	-5.6	294.6	6.2	5.7	-2.6	308.3	319.7	3.9	71.3	1.9	114.
12.3	36.8	3991.6	625.0	-3.2	-11.2	288.5	7.1	6.8	-2.3	309.1	317.0	2.6	53.7	2.4	112.
13.5	39.4	4313.7	600.0	-5.3	-11.3	288.4	6.7	6.3	-2.1	310.3	318.5	2.7	62.5	2.9	112.
14.6	41.9	4646.8	575.0	-7.3	-14.5	283.3	5.3	5.2	-1.2	311.7	318.4	2.2	56.4	3.3	111.
15.7	44.7	4991.6	550.0	-9.9	-17.4	275.2	5.6	5.7	-0.5	312.5	318.1	1.8	54.4	3.6	110.
16.8	47.5	5349.0	525.0	-12.4	-22.8	263.9	5.9	5.9	0.6	313.6	317.3	1.2	41.5	4.0	109.
18.0	50.4	5720.5	500.0	-14.6	-22.3	245.7	8.8	8.0	3.6	315.4	319.5	1.3	52.0	4.4	105.
19.2	53.3	6107.3	475.0	-16.4	-42.2	251.3	10.3	9.7	3.3	317.6	318.3	0.2	8.9	5.0	99.
20.5	56.1	6511.5	450.0	-19.5	-26.7	265.3	12.1	12.1	1.0	318.8	321.9	0.9	52.3	5.8	96.
21.9	59.3	6933.5	425.0	-22.6	-30.7	268.5	16.5	16.5	0.4	320.1	322.4	0.7	47.2	6.9	95.
23.4	62.7	7376.4	400.0	-25.3	-29.3	266.3	21.3	21.2	1.4	322.2	325.0	0.8	68.4	8.6	94.
24.9	66.0	7842.6	375.0	-28.3	-68.0	255.3	25.6	24.8	6.5	324.1	324.1	0.0	1.0	10.8	91.
26.5	69.7	8333.9	350.0	-32.2	-64.7	257.7	22.6	22.1	4.8	325.3	325.4	0.0	2.6	13.1	88.
28.2	73.3	8852.6	325.0	-36.0	-52.3	255.7	22.8	22.1	5.6	326.9	327.4	0.1	23.6	15.2	87.
29.8	77.3	9403.8	300.0	-40.4	99.9	250.3	26.0	24.5	8.8	328.4	999.9	99.9	999.9	17.6	85.
31.7	81.5	9991.2	275.0	-44.7	99.9	240.1	29.9	25.9	14.9	330.4	999.9	99.9	999.9	20.6	82.
33.9	85.9	10621.2	250.0	-50.2	99.9	237.9	30.3	25.7	16.1	331.4	999.9	99.9	999.9	24.4	78.
36.4	90.8	11299.7	225.0	-56.1	99.9	237.6	36.8	31.1	19.7	332.6	999.9	99.9	999.9	28.8	75.
38.9	96.0	12040.3	200.0	-60.5	99.9	242.3	43.6	38.6	20.3	337.0	999.9	99.9	999.9	34.9	72.
41.8	101.5	12863.3	175.0	-63.9	99.9	245.8	45.3	41.3	18.6	344.6	999.9	99.9	999.9	42.7	71.
45.2	108.3	13825.5	150.0	-56.8	99.9	282.9	30.5	29.8	-6.8	372.2	999.9	99.9	999.9	51.5	72.
48.9	115.3	14568.1	125.0	-62.0	99.9	295.1	17.8	16.1	-7.5	382.8	999.9	99.9	999.9	54.7	75.
53.7	124.0	16344.4	100.0	-61.2	99.9	291.3	23.7	22.1	-8.6	409.5	999.9	99.9	999.9	67.8	77.
59.9	134.5	18129.9	75.0	-61.2	99.9	300.4	12.6	10.9	-6.4	444.6	999.9	99.9	999.9	66.2	81.
67.7	145.5	20659.3	50.0	-59.0	99.9	349.4	3.8	0.7	-3.7	504.6	999.9	99.9	999.9	67.9	83.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

70

STATION NO. 451
DODGE CITY, KAN

7 MAY 1975
1115 GMT

155 30. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	14.1	791.0	916.5	5.0	-5.6	220.0	4.7	3.0	3.6	285.5	293.0	2.7	46.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.5	15.6	941.8	900.0	11.6	-6.8	262.0	11.5	11.3	1.6	293.8	301.1	2.6	27.3	0.4	77.
1.3	18.0	1177.1	875.0	11.6	-8.5	263.1	12.1	12.0	1.4	296.1	302.8	2.3	23.5	0.9	80.
2.0	20.5	1418.7	850.0	10.1	-10.0	255.3	10.4	10.1	2.6	297.0	303.2	2.1	23.2	1.4	81.
2.8	22.9	1666.2	825.0	9.7	-12.2	243.7	12.1	10.8	5.4	299.1	304.4	1.8	19.9	1.8	77.
3.5	25.5	1921.0	800.0	8.7	-12.6	237.8	16.1	13.6	8.6	300.7	306.1	1.8	20.7	2.5	73.
4.3	28.1	2182.3	775.0	6.2	-13.4	230.4	17.8	13.7	11.3	300.7	306.0	1.8	22.9	3.2	68.
5.0	30.8	2449.9	750.0	3.9	-14.6	227.0	18.1	13.2	12.4	301.1	306.0	1.6	24.2	4.0	65.
5.9	33.5	2724.0	725.0	1.2	-15.9	222.6	17.2	11.7	12.7	300.9	305.5	1.5	26.6	4.8	61.
6.7	36.3	3004.9	700.0	-1.2	-16.9	215.8	17.9	10.4	14.5	301.4	305.8	1.4	28.9	5.6	58.
7.6	39.2	3293.5	675.0	-3.4	-18.1	217.1	21.1	12.7	16.8	302.0	306.1	1.4	30.9	6.5	54.
8.6	42.0	3597.9	650.0	-5.2	-19.2	222.9	26.4	18.0	19.4	303.2	307.1	1.3	32.2	7.9	52.
9.5	45.0	3897.5	625.0	-7.6	-22.1	223.2	29.1	19.9	21.2	303.8	307.1	1.0	30.2	9.5	50.
10.4	48.1	4215.1	600.0	-8.6	-26.8	223.9	31.6	21.9	22.8	306.2	308.5	0.7	21.2	11.2	49.
11.4	51.1	4544.5	575.0	-9.4	-27.4	224.8	35.1	24.7	24.9	309.1	311.4	0.7	21.3	13.1	49.
12.4	54.4	4886.2	550.0	-12.5	-30.0	221.8	35.8	23.8	26.7	309.3	311.2	0.6	21.5	15.2	48.
13.5	57.6	5240.1	525.0	-14.7	-31.8	218.4	38.4	23.9	30.1	310.7	312.4	0.5	21.6	17.6	47.
14.6	61.0	5607.2	500.0	-17.9	-34.5	217.0	37.7	22.7	30.1	311.2	312.5	0.4	21.9	20.1	46.
15.9	64.6	5988.9	475.0	-20.8	-36.8	216.0	37.7	22.2	30.5	312.2	313.4	0.3	22.1	23.1	44.
17.3	68.1	6385.8	450.0	-24.1	-39.6	213.7	36.1	20.0	30.0	312.9	313.8	0.3	22.3	26.0	43.
18.5	71.7	6799.8	425.0	-27.5	-42.4	215.3	39.8	23.0	32.5	313.7	314.4	0.2	22.5	28.8	42.
19.8	75.7	7232.5	400.0	-31.1	-44.4	219.4	39.0	24.7	30.1	314.5	315.2	0.2	25.4	31.7	42.
21.1	79.8	7686.9	375.0	-34.6	-46.5	227.1	41.0	30.0	27.9	315.8	316.4	0.2	28.1	35.0	42.
22.9	84.0	8166.2	350.0	-38.0	-47.8	232.3	42.9	34.0	26.2	317.5	318.0	0.1	34.4	39.5	43.
24.7	88.2	8673.8	325.0	-40.2	99.9	235.2	42.7*	35.1	24.4	321.3	999.9	99.9	999.9	44.4	44.
26.6	93.0	9214.8	300.0	-44.8	99.9	234.8	44.7*	36.6	25.2	322.2	999.9	99.9	999.9	49.2	45.
28.5	97.6	9790.2	275.0	-50.0	99.9	234.8	45.3*	37.1	26.1	322.8	999.9	99.9	999.9	54.1	46.
31.2	102.6	10408.6	250.0	-51.6	99.9	231.9	37.7*	29.7	23.2	329.4	999.9	99.9	999.9	61.8	47.
34.0	108.3	11097.3	225.0	-48.3	99.9	233.2	40.4*	32.3	24.2	344.5	999.9	99.9	999.9	68.7	48.
36.7	114.0	11871.7	200.0	-49.7	99.9	222.6	29.3*	19.9	21.6	354.0	999.9	99.9	999.9	73.6	48.
39.8	120.3	12746.5	175.0	-52.1	99.9	224.5	19.4*	13.6	13.8	364.0	999.9	99.9	999.9	78.4	47.
43.4	127.0	13732.1	150.0	-57.7	99.9	224.4	18.8*	13.1	13.4	370.6	999.9	99.9	999.9	83.7	47.
47.9	134.7	14857.3	125.0	-53.0	99.9	249.7	25.5*	24.0	8.9	399.0	999.9	99.9	999.9	89.9	48.
53.3	142.0	16324.7	100.0	-58.1	99.9	246.2	23.0*	21.0	9.3	415.6	999.9	99.9	999.9	97.5	49.
59.3	150.3	18116.2	75.0	-62.9	99.9	211.7	23.4*	12.3	19.9	441.0	999.9	99.9	999.9	101.7	48.
67.8	159.7	20654.1	50.0	-58.5	99.9	55.6	9.3	-7.7	-5.3	505.7	999.9	99.9	999.9	101.7	48.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 456
TOPEKA, KAN

7 MAY 1975
1135 GMT

155 19. 0

TIME MIN	CNTCT	HEIGHT GPM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V CCMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.7	6.7	268.0	976.0	6.7	4.5	180.0	2.6	0.0	2.6	282.5	296.5	5.4	86.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.9	999.
0.1	6.8	276.6	975.0	9.2	5.1	999.9	99.9	99.9	99.9	285.1	299.9	5.7	76.9	999.9	999.
0.8	9.1	498.0	950.0	22.3	-1.9	999.9	99.9	99.9	99.9	300.3	313.3	3.5	19.8	999.9	999.
1.7	11.3	729.4	925.0	22.0	-2.1	228.5	8.1	6.1	5.4	302.3	312.5	3.5	19.6	0.7	38.
2.5	13.6	965.8	900.0	19.7	-3.9	233.9	7.0	5.6	4.1	302.3	311.5	3.2	19.9	1.0	43.
3.3	15.8	1207.0	875.0	17.5	-5.6	236.2	8.4	7.0	4.7	302.3	310.7	2.9	20.1	1.4	46.
4.1	18.3	1453.0	850.0	15.0	-7.6	235.1	9.2	7.5	5.2	302.2	309.6	2.5	20.2	1.8	48.
5.0	20.7	1704.4	825.0	12.8	-8.2	230.9	9.2	7.2	5.8	302.4	309.8	2.5	22.3	2.3	50.
5.9	23.2	1961.2	800.0	10.1	-10.4	222.2	10.1	6.8	7.5	302.2	308.7	2.2	22.4	2.8	49.
6.7	25.7	2224.0	775.0	7.9	-12.2	232.0	11.4	9.0	7.0	302.6	308.4	1.9	22.5	3.3	48.
7.6	28.3	2493.3	750.0	6.2	-13.6	242.0	16.2	14.3	7.6	303.5	308.9	1.8	22.6	4.0	50.
8.5	31.0	2770.0	725.0	4.2	-12.9	244.3	20.8	18.8	9.0	304.3	310.2	1.9	27.4	5.0	53.
9.4	33.9	3054.5	700.0	2.3	-15.9	243.2	22.0	19.7	9.9	305.3	311.1	1.6	24.5	6.3	55.
10.4	36.4	3346.6	675.0	-0.5	-19.1	241.3	19.5	17.1	9.3	305.2	309.1	1.2	23.0	7.6	56.
11.5	39.3	3648.5	650.0	-0.0	-21.1	239.8	19.9	17.2	10.0	309.1	312.6	1.1	18.6	8.7	57.
12.5	42.0	3962.0	625.0	-1.0	-21.9	239.1	21.6	18.5	11.1	311.4	314.8	1.1	18.7	10.0	57.
13.5	45.0	4286.1	600.0	-3.5	-23.8	235.3	20.2	16.6	11.5	312.1	315.1	0.9	18.8	11.2	57.
14.6	48.0	4620.8	575.0	-6.1	-25.9	231.4	20.3	15.9	12.7	312.9	315.5	0.8	19.0	12.6	57.
15.7	51.1	4966.6	550.0	-9.1	-28.3	223.7	19.5	13.5	14.1	313.3	315.5	0.7	19.2	13.9	56.
17.0	54.3	5325.0	525.0	-11.5	-30.2	220.1	21.3	13.7	15.3	314.6	316.6	0.6	19.4	15.4	55.
18.2	57.4	5697.2	500.0	-14.2	-32.4	221.5	21.4	14.2	16.1	315.7	317.4	0.5	19.5	16.9	53.
19.5	60.7	6084.4	475.0	-17.0	-34.7	225.8	21.5	15.4	15.0	316.9	318.4	0.4	19.7	18.5	52.
20.8	64.3	6488.1	450.0	-19.4	-35.6	224.5	21.6	15.1	15.4	318.9	320.3	0.4	22.1	20.2	52.
22.3	67.9	6910.5	425.0	-22.4	-38.1	224.9	22.0	15.5	15.6	320.2	321.4	0.3	22.3	22.1	51.
23.6	71.3	7352.8	400.0	-26.1	-39.7	223.6	20.5	14.2	14.9	321.0	322.0	0.3	26.4	23.9	51.
25.2	75.3	7815.5	375.0	-30.5	-42.4	224.3	21.5	15.0	15.4	321.2	322.0	0.2	29.7	25.7	50.
26.7	79.3	8201.9	350.0	-34.2	-45.4	221.4	24.6	16.3	18.5	322.6	323.3	0.2	30.6	28.0	50.
28.5	83.5	8815.6	325.0	-38.5	99.9	217.3	24.1	14.6	19.2	323.5	999.9	99.9	999.9	30.3	49.
30.3	87.8	9359.2	300.0	-44.1	99.9	216.8	24.5	14.7	19.6	323.2	999.9	99.9	999.9	33.0	48.
32.6	92.6	9937.4	275.0	-48.7	99.9	218.5	27.3	17.0	21.3	324.7	999.9	99.9	999.9	36.5	47.
35.2	97.4	10556.9	250.0	-53.4	99.9	219.5	26.3	16.7	20.3	326.7	999.9	99.9	999.9	40.5	46.
37.9	102.5	11232.8	225.0	-54.8	99.9	223.3	30.7	21.0	22.3	334.5	999.9	99.9	999.9	45.0	46.
40.5	108.3	11985.1	200.0	-55.5	99.9	234.9	38.1	31.2	21.9	344.9	999.9	99.9	999.9	50.6	46.
43.4	114.3	12839.6	175.0	-53.3	99.9	243.4	33.9	30.3	15.2	361.9	999.9	99.9	999.9	56.1	48.
47.4	120.7	13825.2	150.0	-55.9	99.9	237.1	22.3	18.7	12.1	373.9	999.9	99.9	999.9	62.2	49.
52.2	127.7	14993.2	125.0	-53.3	99.9	241.5	26.1	22.9	12.5	358.5	999.9	99.9	999.9	69.6	50.
57.7	135.0	16425.0	100.0	-55.2	99.9	255.0	7.4	7.2	1.9	421.0	999.9	99.9	999.9	75.3	51.
65.1	142.3	18228.8	75.0	-59.7	99.9	331.5	2.3	1.1	-2.0	447.8	999.9	99.9	999.9	79.6	52.
74.6	150.0	20763.6	50.0	-59.0	99.9	201.6	3.3	1.2	3.0	504.5	999.9	99.9	999.9	78.2	53.
89.7	158.0	25219.8	25.0	-50.2	99.9	77.7	8.3	-8.1	-1.8	640.4	999.9	99.9	999.9	74.4	51.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 476
GRAND JUNCTION, COLO

7 MAY 1975
1115 GMT

149 17. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MB	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	F POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.0	20.3	1474.0	845.4	5.0	-4.8	155.0	2.6	-1.1	2.4	292.2	301.1	3.2	49.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	975.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	950.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	925.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	900.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	875.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
99.9	99.9	99.9	850.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9
0.6	22.2	1673.2	825.0	4.2	-5.4	169.2	6.0	-1.1	5.9	293.5	302.1	3.1	49.4	0.2	333.
1.4	24.9	1922.9	800.0	2.4	-6.8	162.6	4.3	-1.3	4.1	294.1	302.2	2.9	50.5	0.5	338.
2.3	27.2	2178.5	775.0	0.1	-8.2	203.9	5.6	2.3	5.2	294.2	301.8	2.7	53.7	0.7	346.
3.0	29.8	2440.1	750.0	-2.2	-9.3	217.7	8.2	5.0	6.5	294.4	301.6	2.5	58.4	1.0	359.
3.9	32.6	2708.4	725.0	-4.7	-10.8	235.5	9.9	8.2	5.6	294.6	301.3	2.3	62.4	1.3	13.
4.7	35.3	2983.7	700.0	-6.8	-11.8	246.4	12.2	11.2	4.9	295.2	301.6	2.2	67.5	1.7	27.
5.6	37.9	3266.7	675.0	-9.0	-11.5	251.5	14.6	13.8	4.6	295.9	302.7	2.4	81.8	2.3	39.
6.6	40.7	3557.9	650.0	-11.1	-11.3	258.5	16.5	16.2	3.3	296.7	303.9	2.5	98.7	3.1	49.
7.6	43.6	3858.5	625.0	-12.8	-14.1	269.3	17.6	17.6	0.2	298.0	304.0	2.1	90.4	4.0	57.
8.5	46.6	4163.7	600.0	-15.1	-16.1	276.3	18.5	18.3	-2.0	298.9	304.3	1.8	91.9	4.9	64.
9.4	48.8	4489.3	575.0	-17.5	-18.5	279.9	18.8	18.5	-3.2	299.6	304.2	1.5	92.5	5.8	70.
10.3	52.6	4820.9	550.0	-19.9	-20.7	277.4	18.5	18.3	-2.4	300.6	304.6	1.3	93.4	6.7	75.
11.4	55.8	5164.3	525.0	-22.7	-23.8	275.3	17.4	17.4	-1.6	301.2	304.5	1.1	90.3	7.8	78.
12.5	56.1	5520.3	500.0	-25.3	-26.5	278.5	17.8	17.6	-2.6	302.3	305.0	0.9	88.9	8.8	80.
13.7	62.5	5871.3	475.0	-27.4	-28.3	273.5	16.5	16.5	-1.0	304.1	306.5	0.8	91.9	10.0	82.
14.9	65.9	6279.0	450.0	-29.3	-31.0	275.1	18.2	18.1	-1.6	306.4	308.5	0.6	84.9	11.3	83.
16.1	66.6	6686.6	425.0	-30.8	-33.8	295.2	18.3	16.6	-7.8	309.6	311.3	0.5	74.5	12.5	85.
17.3	73.2	7114.0	400.0	-34.1	-38.4	316.4	16.2	11.2	-11.8	310.7	311.9	0.3	64.7	13.5	89.
18.7	77.2	7562.5	375.0	-38.1	-43.4	334.5	14.5	6.2	-13.1	311.2	311.9	0.2	57.1	14.2	93.
20.2	81.0	8034.0	350.0	-41.2	99.9	343.1	17.9	5.2	-17.1	313.2	999.9	99.9	999.9	14.9	98.
21.8	85.3	8533.5	325.0	-45.1	99.9	343.7	22.8	6.4	-21.9	314.6	999.9	99.9	999.9	15.7	105.
23.6	89.7	9063.2	300.0	-49.3	99.9	330.9	21.3	10.3	-18.6	315.9	999.9	99.9	999.9	17.2	111.
25.7	94.4	9631.3	275.0	-49.2	99.9	318.5	18.2	12.1	-13.6	323.9	999.9	99.9	999.9	19.4	115.
28.0	99.2	10256.3	250.0	-49.2	99.9	302.2	13.5	11.4	-7.2	333.0	999.9	99.9	999.9	21.2	117.
30.4	104.5	10951.4	225.0	-47.4	99.9	268.7	13.0	13.0	0.3	345.9	999.9	99.9	999.9	23.1	116.
33.1	110.2	11728.3	200.0	-48.3	99.9	266.3	17.2	17.1	1.1	356.4	999.9	99.9	999.9	25.0	113.
36.1	116.0	12610.9	175.0	-47.5	99.9	243.6	12.9	11.6	5.7	371.5	999.9	99.9	999.9	27.5	110.
39.3	122.7	13616.8	150.0	-53.6	99.9	234.0	14.0	11.3	8.2	377.8	999.9	99.9	999.9	28.8	105.
43.4	130.0	14786.8	125.0	-53.4	99.9	258.2	11.7	11.5	2.4	398.3	999.9	99.9	999.9	31.4	102.
48.4	138.0	16214.8	100.0	-55.1	99.9	207.9	-13.1	6.1	11.6	421.2	999.9	99.9	999.9	32.9	97.
54.4	146.0	18052.4	75.0	-54.5	99.9	192.9	7.9	1.8	7.7	458.7	999.9	99.9	999.9	34.1	91.
62.3	155.3	20615.2	50.0	-58.3	99.9	320.8	3.0	1.9	-2.3	506.1	999.9	99.9	999.9	33.2	89.
74.6	165.7	25005.2	25.0	-55.6	99.9	53.4	3.4	2.7	-2.0	625.3	999.9	99.9	999.9	32.2	92.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE OR TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG

STATION NO. 11001
MARSHALL SPACE FLIGHT CENTER

7 MAY 1975
1217 GMT

149 53. 0

TIME MIN	CNTCT	HEIGHT GFM	PRES MR	TEMP DG C	DEW PT DG C	DIR DG	SPEED M/SEC	U COMP M/SEC	V COMP M/SEC	POT T DG K	E POT T DG K	MX RTO GM/KG	RH PCT	RANGE KM	AZ DG
0.7	6.5	180.0	991.0	17.8	17.3	150.0	2.6	-1.3	2.3	293.4	326.1	12.7	97.0	0.0	0.
99.9	99.9	99.9	1000.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	999.
0.6	7.9	319.2	975.0	16.1	15.9	178.7	3.1	-0.1	3.1	293.0	323.3	11.7	98.3	0.1	310.
1.6	10.1	541.1	950.0	16.9	14.3	269.3	3.7	3.7	0.0	295.8	324.4	10.9	84.7	0.2	357.
2.4	12.1	768.4	925.0	15.1	11.9	277.2	4.8	4.7	-0.6	296.0	321.1	9.5	80.8	0.3	46.
3.3	14.3	1001.3	900.0	15.8	10.5	290.6	8.2	7.7	-2.9	298.9	322.9	8.9	70.9	0.5	79.
4.1	16.3	1241.0	875.0	15.7	9.6	294.7	12.4	11.2	-5.2	301.3	324.9	8.7	67.2	1.0	95.
5.2	18.6	1486.3	850.0	13.6	6.4	298.7	16.5	14.5	-8.0	301.3	321.0	7.1	61.8	1.8	107.
6.0	20.9	1738.1	825.0	13.4	6.0	298.3	20.1	17.7	-9.5	303.7	323.5	7.1	60.9	2.8	110.
6.7	23.1	1996.6	800.0	11.4	5.7	303.1	20.8	17.5	-11.4	304.2	324.4	7.2	68.0	3.7	113.
7.6	25.4	2261.2	775.0	8.8	4.1	306.9	20.7	16.6	-12.5	304.2	322.8	6.7	72.1	4.7	116.
8.3	27.7	2532.2	750.0	6.6	3.0	307.0	21.3	17.0	-12.8	304.6	322.5	6.4	77.6	5.6	118.
9.1	30.2	2809.3	725.0	3.3	2.0	303.5	23.0	16.1	-12.7	303.9	321.1	6.1	91.4	6.6	119.
10.1	32.8	3093.0	700.0	0.7	-0.2	303.3	27.7	23.1	-15.2	303.9	319.3	5.4	94.0	8.1	120.
11.7	35.3	3385.8	675.0	0.7	0.1	304.6	28.3	23.3	-16.0	307.2	323.6	5.7	95.2	10.9	121.
12.8	37.9	3688.7	650.0	-0.6	-1.2	305.1	25.4	20.8	-14.6	309.0	324.7	5.4	95.8	12.7	121.
13.9	40.5	4002.6	625.0	-1.4	-1.8	308.5	22.7	17.8	-14.1	311.6	327.4	5.4	97.1	14.3	122.
15.4	43.3	4327.7	600.0	-2.7	-3.1	311.9	20.9	15.6	-13.9	313.7	328.7	5.1	97.2	16.2	123.
16.6	46.3	4664.8	575.0	-4.2	-4.7	307.2	19.9	15.9	-12.0	315.6	329.7	4.7	96.4	17.8	124.
18.1	49.3	5014.8	550.0	-6.0	-6.7	297.3	18.5	16.5	-8.5	317.5	330.3	4.2	94.4	19.4	123.
19.8	52.0	5378.0	525.0	-8.5	-9.4	298.2	18.2	16.0	-8.6	318.7	329.7	3.6	92.7	21.2	123.
21.4	55.2	5755.8	500.0	-10.5	-11.8	294.7	17.4	15.8	-7.3	320.6	330.3	3.1	90.0	23.0	122.
23.1	58.3	6149.1	475.0	-13.1	-14.7	290.9	16.6	15.6	-5.9	322.1	330.3	2.6	87.6	24.6	122.
24.8	61.7	6559.4	450.0	-15.5	-17.4	281.3	16.3	16.0	-2.2	323.9	330.9	2.2	85.3	26.3	121.
26.5	65.2	6989.0	425.0	-18.3	-20.6	278.9	18.4	18.1	-2.9	325.6	331.4	1.7	82.5	27.9	120.
28.3	68.7	7438.9	400.0	-21.6	-24.3	265.0	17.2	17.1	1.5	327.0	331.5	1.3	78.3	29.8	118.
30.2	72.3	7911.9	375.0	-24.7	-28.0	258.5	16.8	16.4	3.4	328.9	332.4	1.0	73.8	31.0	116.
32.1	76.3	8410.1	350.0	-28.6	-32.4	256.0	17.9	17.4	4.3	330.2	332.8	0.7	69.2	32.8	114.
33.9	80.4	8936.5	325.0	-32.9	-37.2	256.9	17.3	16.8	3.9	331.3	333.0	0.5	64.8	34.3	112.
35.9	84.8	9493.7	300.0	-38.1	-42.7	266.9	22.6	22.5	1.2	331.6	332.6	0.3	61.3	36.6	110.
38.0	89.4	10086.0	275.0	-43.3	-49.9	264.3	22.9	22.8	2.3	332.6	999.9	99.9	999.9	39.1	108.
40.2	94.4	10719.5	250.0	-49.0	-59.9	264.8	26.1	26.0	2.4	333.2	999.9	99.9	999.9	42.0	106.
42.5	99.6	11402.4	225.0	-54.9	-69.9	265.1	24.3	24.3	2.1	334.4	999.9	99.9	999.9	45.6	105.
45.3	105.4	12143.0	200.0	-61.6	-79.9	271.5	30.9	30.9	-0.8	335.2	999.9	99.9	999.9	49.4	103.
48.2	111.7	12956.9	175.0	-68.5	-99.9	265.7	33.2	33.1	2.5	336.8	999.9	99.9	999.9	53.1	102.
51.9	118.7	13879.9	150.0	-64.9	-99.9	282.2	46.4	45.4	-5.8	358.3	999.9	99.9	999.9	65.0	101.
55.8	126.7	15008.8	125.0	-61.7	-99.9	310.9	23.7	17.9	-15.5	383.3	999.9	99.9	999.9	72.6	103.
61.2	135.7	16366.9	100.0	-67.6	-99.9	296.4	24.9	22.3	-11.1	397.2	999.9	99.9	999.9	78.2	104.
67.3	144.7	18114.3	75.0	-67.1	-99.9	326.8	11.9	6.5	-10.0	432.2	999.9	99.9	999.9	84.7	106.
99.9	99.9	99.9	50.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.
99.9	99.9	99.9	25.0	99.9	99.9	99.9	99.9	99.9	99.9	99.9	999.9	99.9	999.9	999.9	999.

* BY SPEED MEANS ELEVATION ANGLE BETWEEN 6 AND 10 DEG
* BY TEMP MEANS TEMPERATURE ON TIME HAVE BEEN INTERPOLATED
** BY SPEED MEANS ELEVATION ANGLE LESS THAN 6 DEG